Royal Norwegian Council for Scientific and Industrial Research (NTNF)



AD-A241 670

NORSAR Scientific Report No. 1-90/91



Semiannual Technical Summary

1 April — 30 September 1990



Kjeller, November 1990

APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED

UNCLASSIFIED

REPORT I	OCUMENTATIO	N PAGE			n Approved B No. 0704-0188
1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE NOT APPI			
2a. SECURITY CLASSIFICATION AUTHORITY NOT APPLICABLE	3. DISTRIBUTION	AVAILABILITY OF	REPORT		
2b. DECLASSIFICATION/DOWNGRADING SCHEDU NOT APPLICABLE	LE	1	FOR PUBLICUTION UNLIMI		
4. PERFORMING ORGANIZATION REPORT NUMBE Scientific Rep. 1-90/91	R(5)		ORGANIZATION RI		(S)
6a. NAME OF PERFORMING ORGANIZATION NTNF/NORSAR	7a. NAME OF MONITORING ORGANIZATION / HQ/AFTAC/TTS				
Fig. ADDRESS (City, State, and ZIP Code) Post Box 51 N-2007 Kjeller, Norway	7b. ADDRESS (City, State, and ZIP Code) Patrick AFB, FL 32925-6001				
Ba. NAME OF FUNDING/SPONSORING ORGANIZATION Defense Advanced	8b. OFFICE SYMBOL (If applicable)		INSTRUMENT IDE		
Research Projects Agency	NMRO				
Rc. ADDRESS (City, State, and ZIP Code) 1400 Wilson Blvd. Arlington, VA 22209-2308		PROGRAM ELEMENT NO.	PROJECT NO. NORSAR PHASE 3	TASK	WORK UNIT
11. TITLE (Include Security Classification) SEMIANNUAL TECHNICAL SUMMARY	7, 1 APRIL - 30	SEPTEMBER 19	90 (UNCLASS)	IFIED)	
12. PERSONAL AUTHOR(S) L.B. Loughran (ed.)					
13a. TYPE OF REPORT SCIENTIFIC SUMMARY FROM 1	OVERED Apr t&O Sep 90	14. DATE OF REPO Nov 19		Day) 15 PAGE	COUNT 134
16. SUPPLEMENTARY NOTATION					
NOT APPLICABLE					

17.	COSATI	CODES	18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)
FIELD	GROUP	SUB-GROUP	WORKER WORKERS AND ADDRESS AND ADDRESS
8	11		NORSAR, NORWEGIAN SEISMIC ARRAY

19 ABSTRACT (Continue on reverse if necessary and identify by block number)

(Please see reverse side)

91-11415

20. DISTRIBUTION/AVAILABILITY OF ABSTRACT 21. ABSTRACT SECUP	RITY CLASSIFICATION
UNCLASSIFIED/UNLIMITED SAME AS RPT DTIC USERS UNCLASSIF	IED
22b. TELEPHONE (incl.) 22b. TELEPHONE (incl.) 494	/ude Area Code) 22c OFFICE SYMBOL -7765 AFTAC/TTS

PAGES ARE MISSING IN ORIGINAL **DOCUMENT**

This summary -

Abstract

This Semiannual Technical Summary describes the operation, maintenance and research activities at the Norwegian Seismic Array (NORSAR), the Norwegian Regional Seismic Array (NORESS) and the Arctic Regional Seismic Array (ARCESS), for the period 1 April – 30 September 1990. Statistics are also presented for additional seismic stations, which through cooperative agreements with institutions in the host countries provide continuous data to the NORSAR Data Processing Center. (NPDC) These stations comprise the Finnish Experimental Seismic Array (FINESA), the German Experimental Seismic Array (GERESS), and from the fall of 1990, two 3-component station in Poland. Ksiaz and Stary Folwark. This Semiannual Report also presents statistics from operation of the Intelligent Monitoring System, (IMS). The IMS has been operated in an experimental mode using NORESS and ARCESS data, and the performance has been very satisfactory.

The NORSAR Detection Processing system has been operated throughout the period with an average uptime of 98.0%, as compared to 91.8% for the previous reporting period. A total of 2359 seismic events have been reported in the NORSAR monthly seismic bulletin. The performance of the continuous alarm system and the automatic bulletin transfer by telex to AFTAC has been satisfactory. A system for direct retrieval of NORSAR waveform data through an X.25 connection has been implemented, and has been tested successfully for acquiring such data by AFTAC. Processing of requests for full NORSAR/NORESS data on magnetic tapes has progressed according to established schedules.

On-line detection processing and data recording at the NORSAR Data Processing Center (NDPC) of NORESS, ARCESS and FINESA data have been conducted throughout the period, with an average uptime of 92.9% for NORESS and 95.6% for ARCESS. The field computer at the FINESA array was damaged by a thunderstorm in May, and FINESA was out of operation until the end of August. The Intelligent Monitoring System was installed at NORSAR in December 1989 and has been operated experimentally since 1 January 1990. Results of the IMS analysis for the reporting period are given.

There have been no modifications made to the NORSAR data acquisition system. The process of evaluating technical options for upgrading the array is continuing. A test of a full subarray acquisition system will be performed during the next reporting period.

The routine detection processing of NORESS, ARCESS and FINESA is running satisfactorily on each of the arrays' SUN-3/280 data acquisition systems. The routine processing of FINESA data at NORSAR is similar to what is done in Helsinki. GERESS data acquisition and detection processing has commenced during the period.



	Activation for
	BITT GRANT
	BTIO TAB
	buezzocimiesă 📋
	Justification
	night for design. And the following that is recognized and the or the filter of the following design and the following the following design and th
	By
	Ristribution/
	Availability Codes
AR	main- CESS. Special on of

Maintenance activities in the period comprise preventive/corrective maintenance in connection with all the NORSAR subarrays, NORESS and ARCESS. In addition, the maintenance center has been involved with modification of equipment for FINESA and preparatory work in connection with NORESS HF instrumentation. Other activities involved testing of the NORSAR communications systems.

We have continued our work aimed at evaluating the stability of RMS Lg for yield estimation purposes. Using yield data which have recently become available in a Soviet publication, we have found that NORSAR RMS Lg correlates significantly better with yield than does world-wide m_b. These same yield data have been used to evaluate the NORESS detection threshold for Semipalatinsk explosions, and the 90 per cent threshold in terms of yield is found to be as low as 0.1 kt. This low threshold assumes that the explosion is fully coupled and that the background noise is at a normal level.

An initial assessment of results from real-time processing of GERESS array data has been conducted. We have found that a "generic" beam deployment, identical to that in use at NORESS and ARCESS, also works well for the GERESS array. As more experience is gained, we expect, however, that some of the special signal and noise characteristics at the GERESS site will make it desirable to modify some parameters in order to optimize detection performance. So far, GERESS detects a number of earthquake and man-made explosions within 500 km which are not detected by other regional array stations. It also provides additional information which will improve the location accuracy for events detected by multiple stations in the regional network.

The generalized beamforming technique developed by Ringdal and Kværna is now being applied to the network of 4 regional arrays (NORESS, ARCESS, FINESA, GERESS). Initial experience has confirmed the effectiveness of this method in automatically and rapidly providing initial phase associations and epicenter estimates for regional events. For a five-day test period, several hundred regional events were associated, most of which were detected by one array only (P and Lg phases). A total of 37 events had 4 or more phase detections by the regional network. Analyst inspection revealed that 36 of these were properly associated and located, whereas one represented a coincidental match of unrelated phase detections. Further work is now being conducted to fine tune the parameters used by this method, and also to consider incorporating a dynamic consistency check using the thresholds computed by the threshold monitoring technique to assess the likelihood of phase associations.

The concept of threshold monitoring, introduced by Ringdal and Kværna, is a method of monitoring the seismic amplitude levels for the purpose of using this information to assess the largest size of events that might go undetected by a given network. In an effort to demonstrate the capabilities of this threshold

monitoring concept, a preliminary version has been implemented into the Intelligent Monitoring System (IMS). Using recordings by the NORESS, ARCESS and FINESA arrays, the method has been applied for monitoring continuously the Novaya Zemlya test site for a full one-week period. It is demonstrated that the implementation of the threshold monitoring method in the IMS system enables real-time operation. The displays provided by the threshold monitor are particularly valuable in pointing out time intervals of special interest, thus aiding the analyst in his work. The interesting intervals can then be examined by different processing techniques to locate and identify the events. In the actual one-week monitoring experiment, we have found that the combined three-array threshold for Novaya Zemlya is $m_b = 2.2$ or lower 50 % of the time, and $m_b = 2.5$ or lower 99 % of the time. All instances where the threshold exceeds $m_b = 2.5$ correspond to actual interfering seismic events, either regional or teleseismic. Methods are currently being studied on how to further analyze the data during such interference, with the aim to establish operationally reliable monitoring at the lowest possible threshold.

The concept of a very small "hybrid" array/3-component station has been studied. We have used the NORESS A-ring subarray as a test station for a one-week on-line detection processing experiment. We have found that this small array, which has a diameter of only 300 m (i.e., 1/10 of that of NORESS) has a remarkably good performance in distinguishing P and S phases (based on phase velocity estimates) and in obtaining useful azimuth estimates for all phase types. Thus it would appear that supplementing 3-component stations with small triangular arrays of the A-ring type would to a large extent alleviate the problems now encountered in 3-component analysis of secondary phases.

Work is proceeding toward establishing two modern 3-component stations in Poland (Ksiaz and Stary Folwark) with continuous data transmission by satellite to NDPC for integration into the IMS processing. An initial report on the system design, including site descriptions, communication arrangements and the NDPC data acquisition system is presented. An example of data recorded at Ksiaz indicates that data from this station are of high quality and will give a valuable contribution to the regional station network.

Further work on statistically optimal array detection, using a generalization of Capon's maximum likelihood technique, is reported. Examples are presented both for array detection and onset time estimation of regional and teleseismic phases. It is shown in particular that the very strong, low frequent microseismic noise observed at NORESS and ARCESS can be effectively suppressed, due to the high noise coherency. Thus it is possible to regenerate signal waveforms for which the signal is represented in an undistorted way, whereas the microseismic noise is suppressed by as much as 12–18 dB.

AFTAC Project Authorization : T/9141/B/PKP

ARPA Order No. : 4138 AMD # 16

Program Code No. : 0F10

Name of Contractor : Royal Norwegian Council for

Scientific and Industrial

Research

Effective Date of Contract : 1 Oct 1988

Contract Expiration Date : 30 Sep 1991

Project Manager : Frode Ringdal (06) 81 71 21

Title of Work : The Norwegian Seismic Array

(NORSAR) Phase 3

Amount of Contract : \$6,401,883

Contract Period Covered by Report : 1 Apr - 30 Sep 1990

The views and conclusions contained in this document are those of the authors and should not be interpreted as necessarily representing the official policies, either expressed or implied, of the Defense Advanced Research Projects Agency, the Air Force Technical Applications Center or the U.S. Government.

This research was supported by the Advanced Research Projects Agency of the Department of Defense and was monitored by AFTAC, Patrick AFB, FL 32925, under contract no. F08606-89-C-0005.

NORSAR Contribution No. 434

Table of Contents

	P	age
1.	Summary	1
2.	NORSAR Operation	3
	2.1 Detection processor (DP) operation	8
3.	Operation of Regional Arrays	. 14
	3.1 Recording of NORESS data at NDPC, Kjeller 3.2 Recording of ARCESS data at NDPC, Kjeller 3.3 Recording of FINESA data at NDPC, Kjeller 3.4 Event detection operation 3.5 IMS operation	. 18 . 23 . 27
4.	Improvements and Modifications 4.1 NORSAR 4.2 NORESS/ARCESS/FINESA/GERESS	. 44
5.	Maintenance Activities	. 50
6.	Documentation Developed	. 55

		Page
7.	Summmary of Technical Reports / Papers Published	56
	7.1 Detection and yield estimation studies	56
	7.2 Initial results from real-time processing of GERESS array data	67
	7.3 Generalized beamforming using a network of four regional arrays	75
	7.4 Continuous threshold monitoring of the Novaya Zemlya test site	82
	7.5 Real-time processing using a hybrid 3-component/small array station	96
	7.6 Development of two three-component stations in Poland	110
	7.7 Optimal group filtering and noise attenuation for the NORESS and	115

1 Summary

This Semiannual Technical Summary describes the operation, maintenance and research activities at the Norwegian Seismic Array (NORSAR), the Norwegian Regional Seismic Array (NORESS) and the Arctic Regional Seismic Array (ARCESS) for the period 1 April – 30 September 1990. Statistics are also presented for additional seismic stations, which through cooperative agreements with institutions in the host countries provide continuous data to the NORSAR Data Processing Center (NPDC). These stations comprise the Finnish Experimental Seismic Array (FINESA), the German Experimental Seismic Array (GERESS), and from the fall of 1990, two 3-component station in Poland: Ksiaz and Stary Folwark. This Semiannual Report also presents statistics from operation of the Intelligent Monitoring System (IMS). The IMS has been operated in an experimental mode using NORESS and ARCESS data, and the performance has been very satisfactory.

The NORSAR Detection Processing system has been operated throughout the period with an average uptime of 98.0% as compared to 91.8% for the previous reporting period. A total of 2359 seismic events have been reported in the NORSAR monthly seismic bulletin. The performance of the continuous alarm system and the automatic bulletin transfer by telex to AFTAC has been satisfactory. A system for direct retrieval of NORSAR waveform data through an X.25 connection has been implemented, and has been tested successfully for acquiring such data by AFTAC. Processing of requests for full NORSAR/NORESS data on magnetic tapes has progressed according to established schedules.

On-line detection processing and data recording at the NORSAR Data Processing Center (NDPC) of NORESS, ARCESS and FINESA data have been conducted throughout the period, with an average uptime of 92.9% for NORESS and 95.6% for ARCESS. The field computer at the FINESA array was damaged during a thunderstorm in May, and FINESA was out of operation until the end of August. The Intelligent Monitoring System was installed at NORSAR in December 1989 and has been operated experimentally since 1 January 1990. Results of the IMS analysis for the reporting period are given.

There have been no modifications made to the NORSAR data acquisition system. The process of evaluating technical options for upgrading the acray is continuing. A test of a full subarray acquisition system will be performed during the next reporting period.

The routine detection processing of NORESS, ARCESS and FINESA is running satisfactorily on each of the arrays' SUN-3/280 data acquisition systems. The routine processing of FINESA data at NORSAR is similar to what is done in Helsinki. GERESS data acquisition and detection processing has

commenced during the period.

Maintenance activities in the period comprise preventive/corrective maintenance in connection with all the NORSAR subarrays, NORESS and ARCESS. In addition, the maintenance center has been involved with modification of equipment for FINESA and preparatory work in connection with NORESS HF instrumentation. Other activities involved testing of the NORSAR communications systems.

The research activity is summarized in Section 7. Section 7.1 presents a continuation of the evaluation of the stability of RMS Lg for yield estimation purposes. Initial results from real-time processing of GERESS array data are given in Section 7.2. In Section 7.3 a study of generalized beamforming using a network of regional arrays is presented. The continuous threshold monitoring technique as applied to the Novaya Zemlya test site is discussed in Section 7.4. Section 7.5 discusses real-time processing using data from a hybrid 3-component/small array station. In Section 7.6 development work, including system design, site descriptions, communication arrangements and the NDPC data acquisition system, in connection with two new three-component stations in Poland is presented. Optimal group filtering and noise attenuation for the NORESS and ARCESS arrays is discussed in Section 7.7.

2 NORSAR Operation

2.1 Detection Processor (DP) operation

There have been 55 breaks in the otherwise continuous operation of the NOR-SAR online system within the current 6-month reporting interval. The uptime percentage for the period is 98.0 as compared to 91.8 for the previous period.

Fig. 2.1.1 and the accompanying Table 2.1.1 both show the daily DP downtime for the days between 1 April and 30 September 1990. The monthly recording times and percentages are given in Table 2.1.2.

The breaks can be grouped as follows:

a)	Hardware failure	12
b)	Stops related to program work or error	4
c)	Hardware maintenance stops	2
d)	Power jumps and breaks	3
e)	TOD error correction	10
f)	Communication lines	24

The total downtime for the period was 87 hours and 11 minutes. The mean-time-between-failures (MTBF) was 3.2 days, as compared to 1.6 for the previous period.

J. Torstveit


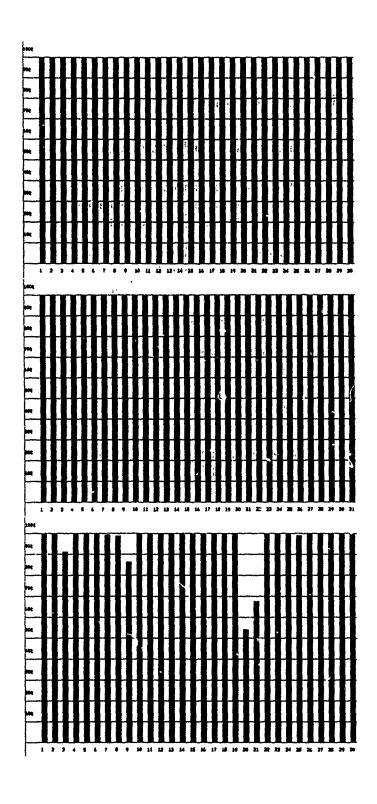


Fig. 2.1.1 Detection Processor downtime for April (top), May (middle) and June (bottom) 1990.

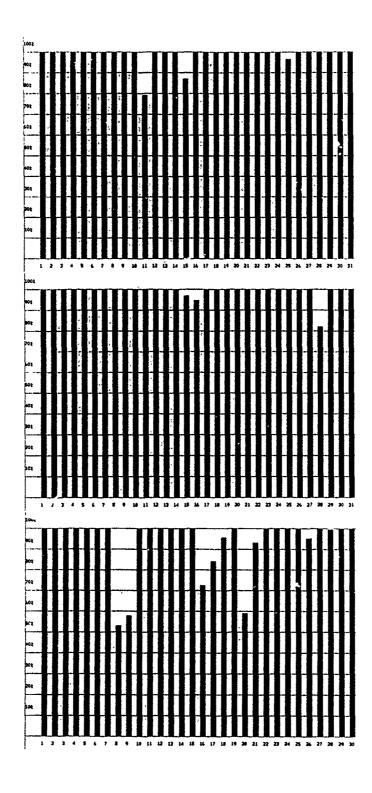

The state of the s

The second of th

Fig. 2.1.1 Detection Processor downtime for July (top), August (middle) and September (bottom) 1990.

LIST D A Y	OF BR	EAKS T	IN DP STOP	PROCESSING THE LAST HALF-YEAR COMMENTS
92	5	40	5	42 TOD RETARED 14MS
93	4	57	5	0 TOD RETARED 7MS
95	7	59	5 8	6 TOD ADJUSTMENT
107	6	Õ	Ğ	2 TOD RETARED 27MS
113	ĕ	14	ĕ	16 TOD RETARED 13MS
116	12	35	12	37 TOD RETARED 40MS
122	12	33	12	2 TOD RETARED 12 S
154	6	14	- 8	19 CPU FAILURE
156	6	54	Ğ	57 TOD RETARED 7MS
158	6	10	6	14 LINE FAILURE
158	11	24	11	28 LINE FAILURE
159	- 8	45	- 8	48 LINE FAILURE
159	Š	7 2	ğ	7 LINE FAILURE
159	9	37	ğ	40 LINE FAILURE
	9	58	10	O LINE FAILURE
159			12	14 LINE FAILURE
159	12	12 21	21	36 AIRCOND. FAILURE
160	18		21	19 LINE FAILURE
166	9 13	16	24	O LINE FAILURE
171		Ŏ	7	44 LINE FAILURE
172	0	0		22 CE MAINTENANC
176	12	.8	12	34 TOD RETARED 31MS
178	é	31	é	43 LINE FAILURE
184	. 5	42	5 10	54 LINE FAILURE
184	10	53		54 LINE FAILURE 29 LINE FAILURE
185	10	28	10	SE LIND DITTIDD
185	10	34	10	35 LINE FAILURE 30 LINE FAILURE
187	11	29	11	
192	. 6	28	11	27 MODCOMP FAILURE 42 AIRCOND. FAILURE
196	16	35	19	
199	11	48	11	50 LINE FAILURE 27 LINE FAILURE
200	12	25	12	
201	10	18	10	20 LINE FAILURE
206	8	30	9	19 POWER FAILURE
225	6	48	6	50 LINE FAILURE
225	11	55	11	57 LINE FAILURE
227	11	2 7	12	47 DP-ONLINE TEST
228	10	7	11	20 DP-ONLINE TEST
228	11	32	11	34 LINE FAILURE
232	. 6	23	.6	25 LINE FAILURE 47 LINE FAILURE
239	10	45	10	
240	ļ	30	4	
240	6	27	6	30 LINE FAILURE 38 POWER BREAKE
240	6	34	7	
249	6	,0	6	2 TOD RETARED 8MS
251	12	43	24	O SOFTWARE PROBLEM
252	0	.0	10	6 SOFTWARE PROBLEM
259	5 2 2	49	12	25 HARDWARE FAILURE
260	2	49	6	36 HARDWARE FAILURE
261	2	45	3	45 HARDWARE FAILURE
261	5	38	5 5	40 LINE FAILURE
263	0	18	. 5	20 SOFTWARE PROBLEM
263	13	43	18	O MAINTENANCE POWER
263	19	15	19	45 HARDWARE FAILURE
264	12	1	12	15 HARDWARE FAILURE
264	21	59	23	22 HARDWARE FAILURE
269	19	25	20	33 HARDWARE FAILURE
271	13	18	13	25 HARDWARE FAILURE

Table 2.1.1 Daily DP downtime in the period 1 April - 30 September 1990.

Month	DP Uptime	DP Uptime	No. of	No. of Days	DP MTBF*
	Hours	%	DP Breaks	with Breaks	(days)
APR 90	719.72	99.96	6	6	4.3
MAY 90	743.97	100.00	1	1	
JUN 90	695.17	96.55	14	10	1.9
JUL 90	743.92	98.88	11	9	2.6
AUG 90	736.58	99.00	10	6	2.8
SEP 90	674.50	93.68	13	10	2.0
		98.03	55	42	3.2

^{*}Mean-time-between-failures = total uptime/no. of up intervals.

Table 2.1.2 Online system performance, 1 April – 30 September 1990.

2.2 Array communications

General

Table 2.2.1 reflects the performance of the communications system throughout the reporting period.

April and May were good months regarding the communications systems. 02C failed due to loss of power, and 06C had problems due to an irregularity related to the CTV equipment.

June was characterized by unstable line conditions affecting all the subarrays, but also subarray electronics failed (02B) and a communication cable between Berger central and the CTV (04C) failed.

In July 02B lost power (week 28), 03C lost synchronization frequently (week 28), and 06C was down approximately 8 hours (week 27) in connection with loss of synchronization after TOD adjustment.

In August 4 subarrays were affected: 02B (weeks 33,34) caused by lightning and loss of power; 02C (week 33) due to an unknown cause; 04C also in connection with lightning and loss of power; 06C was interrupted 11 August, also due to an unknown reason and resumed operation 13 August after a Modcomp restart.

September was also a good period with regard to the communications systems. Only 02B was affected, experiencing spikes on SP channel 04. As previously stated in our reports, the TOD (Time of Day Generator) is less reliable than before, and will probably soon be replaced with by a new system.

Detailed summary

April (weeks 14-17), 2-29.4.90

02C was down from 28 April due to loss of power.

May (weeks 18-22), 30.4-3.6.90

As stated above 02C was affected by loss of power (week 22) and 06C was affected by an irregularity related to the CTV equipment (weeks 20, 21 and 22).

June (weeks 23-26), 4.6-1.7.90

In June all the subarray communications systems were affected by the NTA transmission system (20-21 June). In addition, individual subarrays were also affected: 02B by power outage and SLEM failure (weeks 23, 24 and 25) and 02C (weeks 23, 24) by power failure. Also 04C continued to fail in connection

with a bad cable section between Berger central and the CTV.

July (weeks 27-30), 2-29.7.90

02B, which is in an exposed position with respect to wind, lightning and snow conditions, again failed (9-16 July) due to loss of power. Afterwards NMC Hamar had to reset the SLEM. 03C was affected 4, 10-11 July by excessive resynchronization attempts.

The 04C communications problems, where NTA, NMC and NDPC were involved, were brought to an end 10 July. The next two weeks of the period the communications system operated well. 06C was affected 4 July for approximately 8 hours as a cable between Løten and the subarray was cut by an excavator.

August (weeks 31-35), 30.7-2.9.90

02B was affected 15 and 17 August by lightning and loss of power. In both cases visits to the subarray were necessary to restore the SLEM operation.

18 and 20 August 02C went down, reason not found. After Modcomp restart, the system resumed operation.

Also 04C was affected by lightning and power loss 9 and 16 August.

06C was interrupted 11 August due to an unknown cause. After a Modcomp restart 13 August, the system resumed operation.

September (weeks 36-39), 3-30.9.90

In September all communications systems functioned satisfactorily. 02B was affected between 22 and 24 September probably under the influence of spikes on SP channel 4.

O.A. Hansen

Sub-	Apr 90 (4)	May 90 (5)	Jun 90 (4)	Jul 90 (4)	Aug 90 (5)	Sep 90 (4)	Average
arrays	2-29.4	30.4-3.6	4.6-1.7	2-29.7	30.7-2.9	3-30.9	1/2 year
01A	0.0020	0.0030	²⁾ *0.002	0.002	0.012	0.003	0.004
01B	0.0060	0.0050	³⁾ *0.004	0.009	0.003	0.012	0.006
02B	0.0020	0.0040	4)*N/A	9)*0.003	¹³⁾ *0.002	¹⁷⁾ *0.014	$^{18)}0.005$
02C	0.0009	0.0020	5)*N/A	0.006	¹³⁾ *0.007	0.003	¹⁹⁾ 0.004
03C	0.0010	0.0020	6)*0.600	¹⁰⁾ *0.011	0.004	0.022	0.107
04C	0.0010	0.0010	⁷⁾ *0.890	¹¹⁾ *0.008	¹⁵⁾⁾ *0.006	0.001	0.150
06C	0.0010	1)*0.0310	8)*0.890	12)*0.0007	¹⁶⁾ *0.001	0.006	*0.103
AVER	0.0020	0.0070	0.470	0.005	0.005	0.009	0.054
LESS			02B				
			02C				

^{*}See Section 2.2 regarding figures preceded by an asterisk.

Figures representing error rate (in per cent) preceded by a number 1), 2), etc., are related to legend below.

1),6),11),13)	Average 2 weeks (18,19 / 24,26 / 29,30 / 31,32)
4),5),7),8)	Average 1 week (26,24)
2),3),9),10),12)	Average 3 weeks (23,24,26 / 27,29,30 / 28-30)
14),15),16)	Average 3 weeks (31,32,35 / 31,34,35)
17)	Average 2 weeks (38,39)
18),19)	Average 5 months

Table 2.2.1 Communications performance. The numbers represent error rates in per cent based on total transmitted frames/week (1 April - 30 September 1990).

2.3 Event detection operation

The state of the s

In Table 2.3.1 some monthly statistics of the Detection and Event Processor operation are given. The table lists the total number of detections (DPX) triggered by the on-line detector, the total number of detections processed by the automatic event processor (EPX) and the total number of events accepted after analyst review (teleseismic phases, core phases and total).

	Total	Total	Accept	ted events		
	DPX	\mathbf{EPX}	P-phases	Core phases	Sum	Daily
Apr 90	10350	1282	300	70	370	12.3
May 90	7100	1209	348	87	435	14.0
Jun 90	7700	1326	284	70	354	11.8
Jul 90	8100	1401	482	69	551	17.8
Aug 90	8025	1203	287	79	366	11.8
Sep 90	8475	1007	233	50	283	9.4
			1934	425	2359	12.9

Table 2.3.1. Detection and Event Processor statistics, 1 April - 30 September 1990.

B. Paulsen

3 Operation of Regional Arrays

3.1 Recording of NORESS data at NDPC, Kjeller

Table 3.1.1 lists the main outage times and reasons, and as can be seen the main reasons for the outages are hardware failure at the HUB and line failure.

The average recording time was 92.9% as compared to 96.9% for the previous period.

Da 	te 	Time	Cause
2	4	0216-0401	Power failure HUB
	_	0216-0401 0640-0808	
	-	0829-1210	
		2041-2155	Power failure HUB
	_	2159-	Power failure HUB
	Apr	-1107	Power failure HUB
		2338-	Software failure
7	Apr	-1415	Software failure
7	Apr	1742-1752	Transmission line failure
		0511-0609	Transmission line failure
	-	1200-2008	Hardware failure HUB
21	Apr	0014-0029	Transmission line failure
26	Apr	1937-1959	Transmission line maintenance
2	May	1931-	Hardware failure HUB
8	May	-1014	Hardware failure HUB
14	May	0734-	Hardware failure HUB
15	May	-0921	Hardware failure HUB
29	May	0039-0537	Transmission line failure
29	May	0555-0604	
31	May	1423-1918	Power failure HUB
5	Jun	0523-1510	Software work
	Jun		Transmission line failure
11	Jun	0600-0643	
11	Jun	1106-1339	Transmission line failure
	Jun	2207-2304	Power failure HUB
		1050-1107	Hardware failure NDPC
		2207-2319	
		0859-1506	
28	Jun	1728-1753	Power break HUB

			v.
4	Jul	0727-	Hardware failure NDPC
5	Jul	^ -1718	Hardware failure NDPC
7	Jul	1102-1108	Transmission line failure
25	Jul	0830-0943	Power break NDPC
27	Jul	0004-0057	Hardware failure NDPC
27	Jul	0949-1158	Hardware failure NDPC
1	Aug	1150-1223	Hardware maintenance HUB
8	Aug	1542-1608	Hardware failure NDPC
	Aug	1211-1095	Transmission line test
17	Aug	1259-1534	Transmission line test
21	Aug	0829-0902	Transmission line test
28	Aug	0156-0302	Power break NDPC
28	Aug	0823-1031	Power break NDFC
3	Sep	0844-0915	Power break NDPC
3	Sep	0952-1010	Power break NDPC
	Sep	1023-1027	Power break NDPC
13	Sep	1101-1204	Transmission line test
17	Sep	1213-1234	Transmission line test
26	Sep	1239-1340	Hardware work HUB
30	Sep	0100-0200	Software failure

Table 3.1.1. Interruptions in recording of NORESS data at NDPC, 1 April - 30 September 1990.

Monthly uptimes for the NORESS on-line data recording task, taking into account all factors (field installations, transmissions line, data center operation) affecting this task were as follows:

April	:	93.6%
M.ay	:	76.5%
June	:	96.3%
July	i	93.6%
August	:	98.5%
September	:	98.9%

Fig. 3.1.1 shows the uptime for the data recording task, or equivalently, the availability of NORESS data in our tape archive, on a day-by-day basis, for the reporting period.

J. 'forstveit


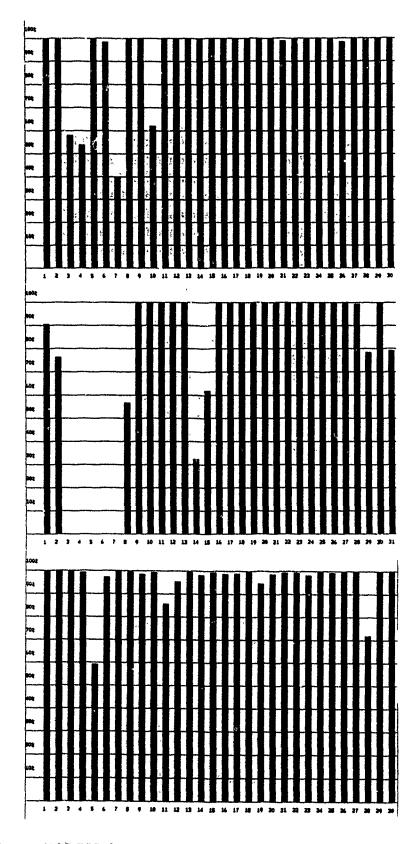


Fig. 3.1.1. NORESS data recording uptime for April (top), May (middle) and June (bottom) 1990.

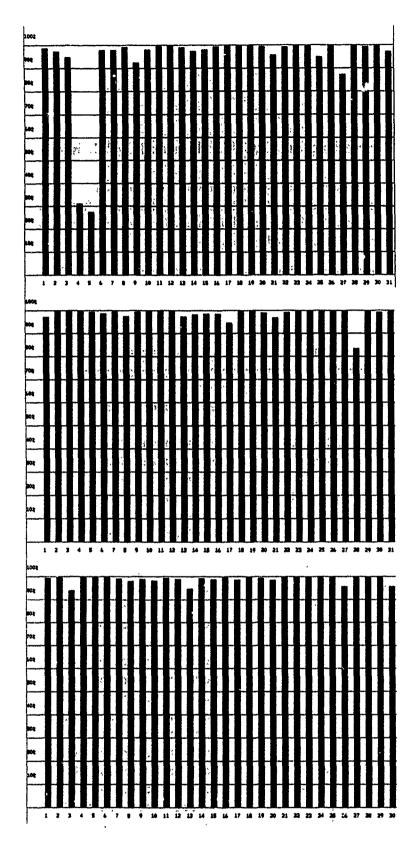

The state of the s

Fig. 3.1.1. (cont.) NORESS data recording uptime for July (top), August (middle) and September (bottom) 1990.

3.2 Recording of ARCESS data at NDPC, Kjeller

The main reasons causing most of the ARCESS outage in the period are: Hardware failure at NDPC or HUB, power failure at HUB and work by the power company to reinforce the line from which power is supplied for ARCESS. Outage intervals are listed in Table 3.2.1.

The average recording time was 95.6% as compared to 95.3% for the previous period.

Da	ate	Time	Cause
24	Apr	2058-	Power break HUB
25	Apr	-0355	Power break HUB
25	Apr	1322-1336	Power break HUB
25	Apr	2100-	Power break HUB
26	Apr	-0408	Power break HUB
26	Apr	2110-0648	Power break HUB
9	May	1124-1348	Software maintenance
10	May	1426-	Hardware failure NDPC
11	May	-0451	Hardware failure NDPC
11	May	0641-0819	Hardware failure NDPC
13	May	2102-	Work on powerline HUB
14	May	-0605	Work on powerline HUB
14	May	2101-	Work on powerline HUB
15	May	-0527	Work on powerline HUB
15	May	2100-	Work on powerline HUB
16	May	-0535	Work on powerline HUB
20	May	2102-	Work on powerline HUB
21	May	-0324	Work on powerline HUB
21	May	2102-	Work on powerline HUB
22	May	-0608	Work on powerline HUB
22	May	2058-	Work on powerline HUB
23	May	-0451	Vork on powerline HUB
25	May	2219-2319	Hardware failure NDPC
26	May	1315-1348	Hardware failure NDPC
6	Jun	1747-1916	Transmission line failure
7	Jun	1540-1724	Transmission line failure
8	Jun	1019-1052	Hardware failure NDPC
10	Jun	1149-1210	Hardware failure NDPC
		0828-0912	Software failure
3	Jul	1437-	Transmission line failure

4	Jul	-1011	Transmission line failure
5	Jul	1058-1115	Software failure
5	Jul	1502-1553	Software failure
7	Jul	0850-0913	Software failure
7	Jul	1434-1447	Hardware failure NDPC
8	Jul	0902-0925	Hardware failure NDPC
9	Jul	2112-2125	Software failure
14	Jul	0504-0620	Scftware failure
14	Jul	1730-1738	Software failure
21	Jul	2134-	Software failure
22	Jul	-0809	Software failure
23	Jul	1156-	Hardware failure HUB
24	Jul	-1854	Hardware failure HUB
25	Jul	0757-0839	Power break NDPC
3	Aug	0705-0814	Software failure
4	Aug	0942-0952	Software failure
22	Aug	0437-0522	Software failure
23	Aug	0531-0556	Software failure
23	Aug	1832-1849	Software failure
28	Aug	0114-0305	Power break NDPC
28	Aug	0548-0715	Power break NDPC
28	Aug	0823-1031	Power break NDPC
3	Sep	0844-0915	Power break NDPC
3	Sep	0952-1010	Power break NDPC
3	Sep	1023-1027	Power break NDPC
13	Sep	2238-	Hardware failure NDPC
14	Sep	-0529	Hardware failure NDPC
20	Sep	1329-1339	Work on power NDPC
20	Sep	1632-1749	Power break HUB
25	Sep	1529-	Hardware failure NDPC
26	Sep	-0539	Hardware failure NDPC


Table 3.2.1. The main interruptions in recording of ARCESS data at NDPC, 1 April - 30 September 1990.

Monthly uptimes for the ARCESS on-line data recording task, taking into account all factors (field installations, transmissions line, data center operation) affecting this task were as follows:

April : 96.7%
May : 90.7%
June : 99.4%
July : 91.1%
August : 98.9%
September : 96.7%

Fig. 3.2.1 shows the uptime for the data recording task, or equivalently, the availability of ARCESS data in our tape archive, on a day-by-day basis, for the reporting period.

J. Torstveit

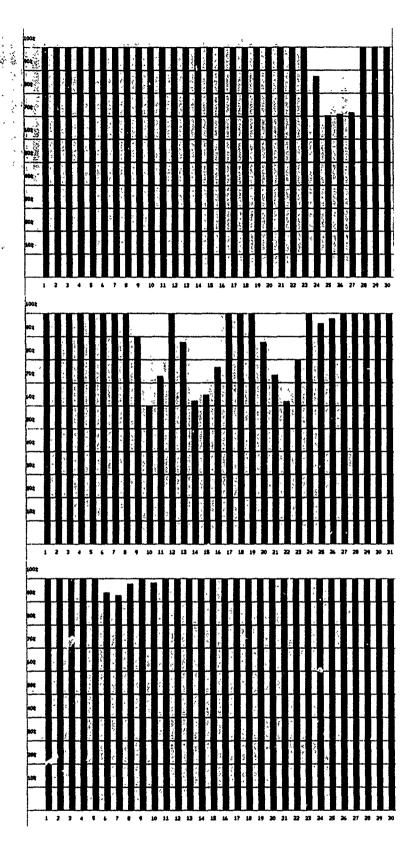

SERVE PERSONAL PROPERTY OF A STATE OF THE SERVE SE

The second secon

Fig. 3.2.1. ARCESS data recording uptime for April (top), May (middle) and June (bottom) 1990.

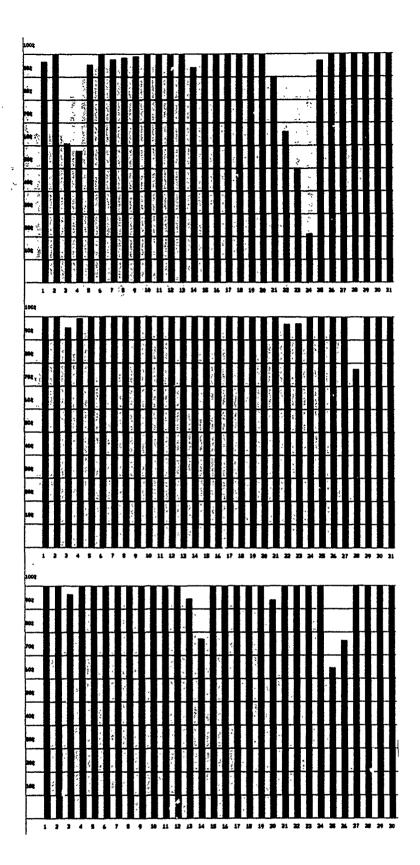


Fig. 3.2.1. (cont.) ARCESS data recording uptime for July (top), August (middle) and September (bottom) 1990.

3.3 Recording of FINESA data at NDPC, Kjeller

The average recording time was 39.0% as compared to 98.5% for the previous period. The main reason for the low uptime of the FINESA array was a thunderstorm on May 22 that put the field computer out of operation until August 26 except for a few hours on June 19.

Da	te	Time	Cause
2	May	0625-	Hardware/software problems NDPC
8	May	-1925	Hardware/software problems NDPC
15	May	0044-0119	Transmission line failure
15	May	1653-	Transmission line failure
16	May	-1103	Transmission line failure
22	May	0926-	Hardware failure HUB
19	Jun	-0752	Hardware failure HUB
19	Jun	1231-	Hardware failure HUB
26	Aug	-0830	Hardware failure HUB
26	Aug	2328-	Hardware failure HUB
29	Aug	-0955	Hardware failure HUB
		1002-1009	Hardware failure HUB
31	Aug	1132-1956	Hardware failure HUB
6	Sep	0940-	Transmission line failure
12	Sep	-0805	Transmission line failure
13	Sep	2314-2332	Transmission line failure
14	Sep	0030-0054	Transmission line failure
18	Sep	0515-0520	Transmission line failure
20	Sep	1328-1400	Maintenance NDPC
20	Sep	1718-1737	Maintenance NDPC
26	Sep	0958-1019	Transmission line failure
26	Sep	1037-1154	Transmission line failure
27	Sep	0743-1302	Transmission line failure


Table 3.3.1 The main interruptions in recording of FINESA data at NDPC, 1 April - 30 September 1990.

Monthly uptimes for the FINESA on-line data recording task, taking into account all factors (field installations, transmissions line, data center operation) affecting this task were as follows:

April : 100.0%
May : 45.0%
June : 0.6%
July : 0.0%
August : 9.2%
September : 79.0%

Fig. 3.3.1 shows the uptime for the data recording task, or equivalently, the availability of FINESA data in our tape archive, on a day-by-day basis, for the reporting period.

J. Torstveit

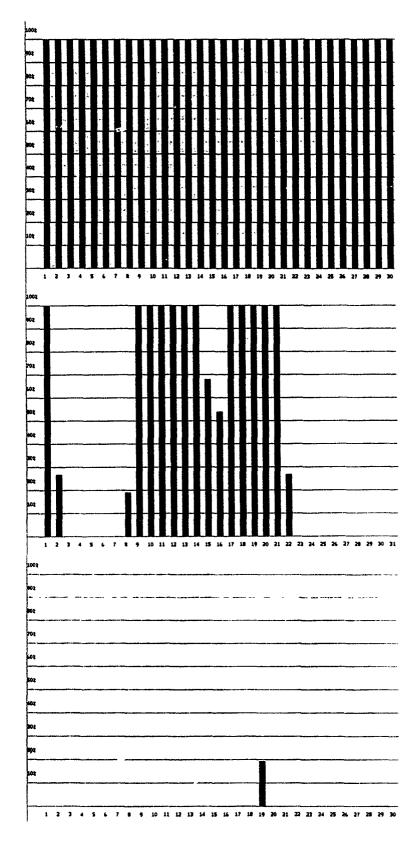

The state of the s

Fig. 3.3.1. FINESA data recording uptime for April (top), May (middle) and June (bottom) 1990.

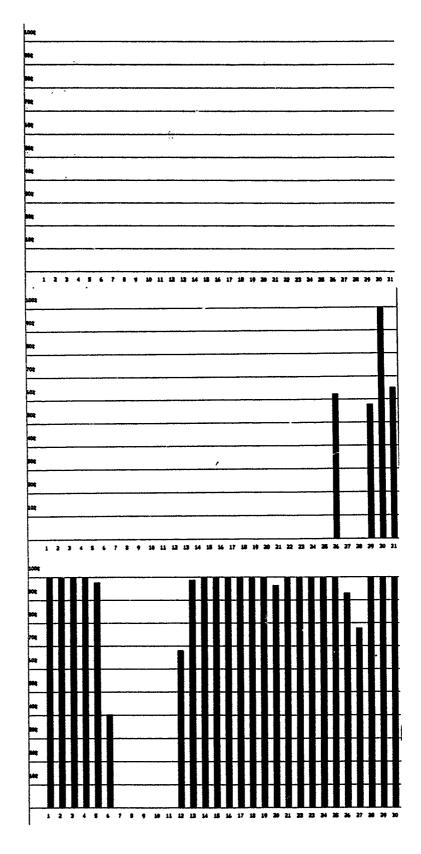


Fig. 3.3.1. (cont.) FINESA data recording uptime for July (top), August (middle) and September (bottom) 1990.

3.4 Event detection operation

NORESS detections

The number of detections (phases) reported during day 091, 1990, through day 273, 1990, was 43734, giving an average of 239 detections per processed day (183 days processed).

Table 3.4.1 shows daily and hourly distribution of detections for NORESS.

Events automatically located by NORESS

During days 091, 1990, through 273, 1990, 2275 local and regional events were located by NORESS, based on automatic association of P- and S-type arrivals. This gives an average 12.4 events per processed day (183 days processed). 60 % of these events are within 300 km, and 86 % of these events are within 1000 km.

ARCESS detections

The number of detections (phases) reported during day 091, 1990, through day 273, 1990, was 84203, giving an average of 460 detections per processed day (183 days processed).

Table 3.4.2 shows daily and hourly distribution of detections for ARCESS.

Events automatically located by ARCESS

During days 091, 1990, through 273, 1990, 4307 local and regional events were located by ARCESS, based on automatic association of P- and S-type arrivals. This gives an average 23.5 events per processed day (178 days processed). 49 % of these events are within 300 km, and 84 % of these events are within 1000 km.

FINESA detections

The number of detections (phases) reported during day 091, 1990, through day 273, 1990, was 28235, giving an average of 392 detections per processed day (72 days processed).

Table 3.4.3 shows daily and hourly distribution of detections for FINESA.

Events automatically located by FINESA

During days 091, 1990, through 273, 1990, 1385 local and regional events were located by FINESA, based on automatic association of P- and S-type arrivals. This gives an average 19.2 events per processed day (72 days processed). 68 % of these events are within 300 km, and 87 % of these events are within 1000 km.

J. Fyen

	Sunday Monday Monday Tuesday Tuesday Saturday Saturday Saturday Sunday Monday Thur sday Saturday Sunday Thur sday Sunday Monday Thur sday Friday Saturday Saturday Sunday Monday Thur sday Friday Sunday Monday Thur sday Friday Sunday Monday Thur sday Sunday Monday Thur sday Sunday Monday Thur sday Sunday Monday Thur sday Sunday Mednesday Thur sday Thur sday Sunday Mednesday Thur sday Thur sday Sunday Mednesday Thur sday Friday Saturday Saturday Saturday Saturday Saturday Saturday Friday Friday Mednesday Thur sday Thur sday Thur sday
	Sunday Wednesday Thesday Thesday Thursday
41	00000000000000000000000000000000000000
Date	APPT APPT APPT APPT APPT APPT MAAY MAAY MAAY MAAY MAAY MAAY MAAY MAA
Sum	10000000000000000000000000000000000000
23	1 1 1
22	222287-0002300130424645070000000000000000000000000000000000
21	11110000000000000000000000000000000000
20	11122 1112 1 1 1 1 1 1 1 1 1 1 1 1 1 1
19	222222 + 3 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -
18	1011111
17	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
16	1 1111 1 1 11111 1 1 1 1 1 1 1 1 1 1 1
15	11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
14	222 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
13	7 11 1 7 1 1 1 7 1 1 1 1 7 7 1 1 1 1 7 7 1 1 1 7 7 1 1 1 7 7 1 1 1 7 7 1 1 1 7 7 1 1 1 7 7 1 1 1 1 7 7 1 1 1 1 7 7 1
12	103323374 1 100001 1 100001 1 1 1 1 1 1 1 1 1 1
11	1100 11 11 11 11 11 11 11 11 11 11 11 11
10	111 173 173 173 173 173 173 173 173 173
60	70000000000000000000000000000000000000
90	111 111 11 11 11 11 11 11 11 11 11 11 1
07	04001009C0144840188688460CCCCCCCCCCCCCCCCCCCCCCCCCCCCCCCC
90	00000000000000000000000000000000000000
05	044040011008041121100408080604808080000000000000000000000
04	0 m d 0 m 0 0 4 m 0 m 0 m 0 m 0 m 0 m 0 m 0 m
03	0.000000000000000000000000000000000000
02	100 100 100 100 100 100 100 100 100 100
01	00000000000000000000000000000000000000
90	08001000000000000000000000000000000000
Day	654442110987654321098765443210987654432109876544321098765443210987654432109876544321098765443210987654432109876544321098765444444444444444444444444444444444444

NRS . FKX Hourly distribution of detections

The second secon

	Sunday Monday Tuesday Wednesday Friday Saturday Sunday Mednesday Thursday Saturday Saturday Saturday Sunday Wednesday Wednesday Friday Sunday Wednesday Tuesday Friday Saturday Sunday Monday Tuesday Friday Saturday Sunday Monday Thursday Friday Saturday Sunday Monday Thursday Friday Saturday Saturday Saturday Saturday Sunday Monday Thursday Friday Saturday Saturday Saturday Saturday Saturday Saturday Saturday Saturday Sunday Monday Thursday Friday Saturday Friday Saturday	
	27000000000000000000000000000000000000	
Date	MANANA MA	
Sum	2020 2020 2020 2020 2020 2020 2020 202	
23	111 11 122 123 11 11 11 11 12 12 12 12 13 13 14 15 15 15 15 15 15 15 15 15 15 15 15 15	
22	2021-201-201-201-201-201-201-201-201-201	
-	11402424211888142018	
0		
9	ϕ of the contraction of the c	
9		
Ξ.	13	
9 1.	0.000 0.000	
Ä		
15	01104061111386903868486796967850040785010111111111111111111111111111111111	
14	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
13	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
12	1000111 10 01 111111 212211 22 21211 1 111111 1 222211	
11	00000000000000000000000000000000000000	
10	111	
60	1 1 1 1 2 7 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
80	678 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
07 (128 5 110 4 2 4 12 3 1 6 2 1 1 8 4 2 2 2 2 6 6 5 8 1 8 4 2 4 1 2 2 1 1 6 8 1 6 8 1 6 8 1 8 4 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
90	12 6 12 12 12 12 12 12 12 12 12 12 12 12 12	
05 (78 10 28 8 8 9 7 9 7 9 7 9 9 9 9 9 9 9 9 9 9 9	
4		
3	8420141106574 20 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
20	000000000000000000000000000000000000	
0 1	w w o o d d d d d d d d	
0 0		
0	1 1 262221 1 1 111 2 6	
Эау	7444444 744444444444444444444444444444	

NRS .FKX Hourly distribution of detections

Sunday
Monday
Monday
Meedagy
Wednesday
Friday
Sunday
Mednesday
Thursday
Friday
Saturday
Saturday
Sunday
Monday
Thursday
Friday
Saturday
Sunday
Monday
Thursday
Friday
Saturday
Saturday
Saturday
Saturday
Friday
Saturday
Friday
Saturday
Friday
Saturday
Friday
Saturday
Friday
Sunday
Monday
Thursday
Friday
Saturday
Mednesday
Thesday
Mednesday
Thesday
Thesday
Mednesday
Thesday
Mednesday
Thesday Thursday Friday Saturday Sunday Monday Wednesday Thursday Friday Saturday Sunday Monday Wednesday 22592 22692 22792 4084H04060GHC046EH060C0EE4664C4600G44CE60GC0GCCEH1CGCEAGE 21 14 40704000478730604176700887874801048867776470486767810 07 90 05 $\begin{matrix} \mathbf{0} \\ \mathbf{0}$ 04

The second of th

detections

ot

FKX Hourly distribution

ない

		Sunday Monday Tuesday Wednesday Thursday Friday Saturday Sunday Monday Mednesday Thursday Thursday Friday Saturday		uns	average	Average workdays	e weekends
	Date	Sep 116 Sep 117 Sep 117 Sep 22 Sep 22 Sep 23 Sep 24 Sep 24 Sep 24 Sep 24 Sep 26 Sep 26 Sep 27 Sep 27		Total	Total	Averag	Average
	Sum	170 201 164 161 111 111 111 111 116 116 116 11		43734	239	253	210
	23	40727779 1336 1336 1336 1336 1336 1336 1336 133	23		11	12	6
	22		22	7 2040 1042	9	S	9
	21	44444000441010006	21	107	7	9	7
	20	27111873339111	20	2179	12	14	80
	19	00000000000000000000000000000000000000	19	62 21	10	10	ထ
	18	80 90 70 11 10 10 10 10 10 10 10 10 10 10 10 10	18	8 1762 2194 21	12	13	6
	17	224896884846922	17	710 2278 2307 219	12	13	12
	16	260473H2045439	16	22 07	13	13	11
	15	110000000000000000000000000000000000000	15	1710 58 23	6	6	10
	14	10 11 10 10 10 10 10 10 10 10 10 10 10 1	4	Hω	0	11	9
	13	446656464897744	13	92 18	13	15	6
Ø	12	47498699148844 4749869414884	12	23 85	13	16	ထ
detections	11	2322706376976	11	2329 2392 89 2385 186	13	14	6
ect	10	11800021182602184	10	4 23 2089	11	11	11
det	60	210011084621	60	6 4 20	12	12	11
	80	477 173 173 173 173 174 175 175 175 175 175 175 175 175 175 175	80	9 2164 1860 2	10	11	80
ly distribution of	0.2	E4444478807888	07	1579 37 18	6	6	7
uti	90	110 110 110 110 110 110 110 110 110 110	90	15 37	80	œ	10
rib	0.5	wenunuuv420c24	05	1519 1 74 1537	œ	œ	8
ist	04	NCGW@414NGG4NGH	04	5 15 1174	9	9	7
۵ ۲	03	L40HW0HWWHW444	03	185	9	9	8
url	02	471 110 110 110 110 110 110 110 110 110 1	03	11	12	14	10
오	01	000000000000000000000000000000000000000	01	62	7 7 12	7 14	8
NRS . FKX Hour	00	20 11 12 12 12 13 14 10 10 10 10 10 10 10 10 10 10 10 10 10	00 01	m 1362 11 1289 2283	7	7	7
NRS	Day	255 266 266 266 266 266 270 271 271	NRS	Sum 1	183	123	9

> day is shown number of detections within each hour of the day, and number of detections for that day. The end statistics give total number of detections The averages show number of processed days, hourly distribution and average Table 3.4.1. Daily and hourly distribution of NORESS detections. For each distributed for each hour and the total sum of detections during the period. per processed day. (Page 4 of 4)

	Dat	Арри Арри Арри Арри Арри Арри Арри Мару Мару Мару Мару Мару Мару Мару Мару
	Sum	00000000000000000000000000000000000000
	23	6484844744747474747474747474747474747474
	22	100 00 00 00 00 00 00 00 00 00 00 00 00
	21	44440440000000000000000000000000000000
	20	0
	19	00000 1000 1000 1000 1000 1000 1000 10
	18	80 80 80 80 80 80 80 80 80 80 80 80 80 8
	17	11112 1 21 21 2211 2211 1 1 1 1 1 1 1 1
	16	412
	15	00000011-401044010001004411000001000010
	14	00000000000000000000000000000000000000
	13	1000000100100 1 1001100011 11111
Ŋ	12	00000000000000000000000000000000000000
ion	11	00000000000000000000000000000000000000
ecti	10	02000000000000000000000000000000000000
det	60	1221111 11 112 21112112121 1 11221212322111 1 122112232111 1 1221112232111 1 122112232111 1 122112232111 1 122
of	80	221212 11111 1 1 1 1 1 1 1 1 1 1 1 1 1
ö	07	1010103 1 10 10 10 10 10 10 10 10 10 10 10 10 1
ut j	90	14444172 11772
stributi	05	446 446 1 1 11 1 11 1 1 1 1 1 1 1 1 1 1
·~	04	00000000000000000000000000000000000000
б	03	4048 086 48 1 1 11 1 1 2 2 1 1 1 1 1 0 0 0 0 0 0 0
urly	05	87667 484 44 1111 1111 1111 1111 1111 1111 1
Hour	010	8008 488 1 1 1 822 1 1 1 1 828 1 1 1 1 1 1 1 1
. FKX	00	11.03 0.01
FRS	Day	65444443311000000000000000000000000000000

Sunday
Wenday
Tuesday
Wennesday
Friday
Saturday
Sunday
Tuesday
Friday
Saturday
Sunday
Thursday
Friday
Saturday
Sunday
Wenesday
Thursday
Friday
Sunday
Thursday
Friday
Sunday
Wednesday
Wednesday
Tuesday
Wencesday
Wencesday
Wencesday
Friday
Saturday
Sunday
Wencesday
Wencesday
Friday
Saturday
Sunday
Wencesday
Wencesday
Thursday
Friday
Saturday
Sunday
Wednesday
Thursday
Friday
Saturday
Saturday
Saturday
Saturday
Saturday
Saturday
Friday
Saturday
Saturday
Friday
Saturday
Saturday
Friday
Saturday
Saturday
Friday
Saturday
Saturday
Saturday
Saturday
Saturday
Friday
Friday
Saturday
Saturday
Saturday
Saturday

は、 これのない、なななない、なななないとのできている

	y y	_	۳. تې			ay y			y y			Ä:				ay Y			>	١.			>		
	שו מיי≺	ay rday ay	יסיב	suay ay rday	ay ay day	יוס מ	day Yay	A A	gg >	rday	ay ay	SOL	ay	gay Y	_ > .'	77 181	y day	` >> >-	ay sday	, re	day		ay sday dav	y day	ı
	Sunday Monday Tuesday Wednes	Friday Saturd Surday Monday	Tuesd	rnu su Friday Saturda	Sunda Monda Tuesd	Wedne	Saturd Sunday	Monda		aturd	g ga	ledne	470 :	unda	a 70	irsd	ida	Sunday	Tuesda Wednes	ırsd	n D 1	onday	uesda ednes hursd	riday	
	Sund Mond Tues Wedn Thur	S Su M	5.5	Frid Satu	N S E	35	Sa	옷류	Wedn Thur	Satu	Mond	Wedn	Prid	Sund	Mond	Wedn	Frid Satu	Sus	F G	Thur	Sat	ž	3 8 5	Fr	
	27 28 29 30 31	2222	96	386	212	14	16	18	222	333	52	27.0	369	323	33	04	96	86	11	12	141	196	18	52	
, ,	May May May May		Jun	den Jen	Jun Jun	Jun J	yen Jen	Jun	and in	Jan J	and i	Jan J	d d d	den Jen	Jar Jar	a tr	Jul	Jul	Jul	17	7.7	ig:	dul July	EE	
	380 462 420 357 451	18 71 53	33	200	67 07	30	61 97	16	730	4.0	366	46	42	93	57	34	808			4.			722	38	
1										• • •	•														
	98497									\sim															
ì	44224									-															
1	122	~ ~	2	0	~~	W 43 C	4 – –	~ ·	4. W A	າໝຸ		٦ ،	0 H	~		S		~	1	٠ ١		7	400	10.6	
)	33 12 12 16	16 3 3	10	77	21	133	900	ω ★	45 45 45	54.0	00	o 4. (22	19	90	10 60	18	26	10	50:	24 5	30	33	2023	j
ì	33 13 14 16	25 4 6	w 0 t	120	14 18 18	122	* • •	16 11	313	1 <u>0</u> 0	000	7 20 1	15	စ ထ ု	10	17 23	3	28 48	7 4	10	51 29	22	31 17	36	j I
1	322 332 34	43	E 0 t	41 41	7 10	10	13	8 9	26 38 45	54.	٥٥ ر	17	191	14 9	13	26 20 20	36	38	31	300	133	14	33	331	Í
	22 72 114 113	110	14.	12 52	15 17	133	19 19 18	6	11 38 20	161	000	201	7 7 7	132	53	10	10	27	13	35	179	25	222	204	;
) i	130	0 4 8 8	29	13	28 28 28	37	197	10	333	44.1	904	261	57	17	21	6 6	33	37	26	53	76	25	45	256	;
1	42222	27 11 12	23	37	27 27 2	15	17	26 18	47	211	00	13	55.	==:	17										
	04540	- - -	900	200		C 4 0	000		~ ~ a		000		امو	9	8 C3	٥ م	ιΩ 4		ر د	າທຸ		ო თ		- IO O	,
) 	25832	949	525	233	34 27 25	37	180	24	204	26	00	334	386	61	332	3.4 7.	515	23	33	9 60	31	7			1
1	112	4261	18	200	8 9 9	23	30	22	000	200	200	0 40	200	۰۵۰	0	61	& C	9 0 0	ຕິແ) et l		4· W	4.0		
	32078	ကကဝဏ		00		∞ π ν	0 4	00	6 4 μ	א ריי	0 •	4 [- (> (0 ~		40	ω~	, o	90 %	7	5-1	8 7		J 4. W)
	18289									-												-			•
	32 38 33 33 33 33 33 33 33 33 33 33 33 33																								
,	26762	m 00 m H	400	701	0 10 10	010	v L 4	7	∞ ∿ ⋖	* W *	+0														
	~60400 	400	2	2 W W C	0	444	* ~ ^ ~ ~	69	∾ e e	,0,	0 7	n (N)	- -	(1)	(2	~	w c	. <i>(</i> 7	٠ ٧	00	m (7)	ω ω	C) 4. (14 4 C	4
,	N	- C	04	2 CA	-1 6 7	H W 4	*	നന	4.0	4 W F	7 "	0 4	201	-	~	(1)	000) H ~	4 R	0 (7)	~ -	- 4	200	H 44 €	•
,	118 22 20 118 118 118									-	ר ב	י מי		- €		~		1 11 0	100	o :	~	2 4	W 4.	~ ~ ~	4
	84484 84484	~ ~						~	~ -	4 W C	7 7	7 C)	7 7	7		-	-	100	, W 4	00	-	~	04.	-1 CO C	4
	40444		-	*	22.0	~	13.5			4 6	7	•	-1 co .		-	-	-	~	4 44 12	n H	N	2	W 4.	<i>ω</i> ⊶ ~	י
,	100118																								•
,	4 H H H H	-	r	v		13					┥														
!	W 4 4 E C		•			•	7		- €	۶ ۲۰۰۰	4, (2 H	-			•	-		44-	10	~ ~	-	24.	100	4
)	20000	24 44 4 6	4/0	10	124	20	1 O O	12	44 13 7	39	0.07	0 00 1	41	18	111	0 0	80.0	9 ~4 C	52	16	18 19	ဆ ဖ	23	010	,
4	78601	25.5	922	0,00	323	4.55	8 7 9	60	222	24.	0 6 1	- 20	20	<u> </u>	≅ ₹	ى ق	<u>_</u>	200	2 2 2	2 0	4 0	97	8 6	2 7 2	4

Sum Date

FRS .FKX Hourly distribution of detections

	A A A A A A A A A A A A A A A A A A A
	Sunday Wonday Wonday Thuesday Wednesday Thursday Saturday Saturday Saturday Saturday Saturday Wednesday Wednesday Wednesday Wednesday Wednesday Thursday Friday Saturday Saturday Saturday Saturday Saturday Friday Wednesday Wednesday Wednesday Wednesday Thursday Friday Saturday Saturday Saturday Saturday Friday Wednesday Wednesday Wednesday Wednesday Wednesday Wednesday Wednesday Wednesday Friday Saturday Saturday Saturday Saturday Saturday Saturday Friday Wednesday
	Sunday Monday Monday Tuesday Wednesday Wednesday Monday Thursda Saturda Saturda Saturda Sunday Wednesday Tuesday Wednesday
	11111000000000000000000000000000000000
Date	Juli Juli Juli Juli Juli Juli Juli Juli
	#000000100011700140000100040010000100000000
Sum	9.2 4.2 4.2 4.2 4.2 4.2 4.2 4.2 4.2 4.2 4
23	00000000000000000000000000000000000000
22	101121 2 11121 2 11121 2 11121 2 11121 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
21	0040201 011110 01010 0000000 000000 000000 000000
20	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
19	1 111 1 21 111111111111111111111111111
18	6
17	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
16	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
15	$\begin{array}{cccccccccccccccccccccccccccccccccccc$
14	0 10450366111
13	f 4 - CORRITOR WAS ALLO SOLD SOLD SOLD SOLD A CORRESPONDENCE OF SOLD SOLD SOLD SOLD SOLD SOLD SOLD SOLD
12	$egin{array}{cccccccccccccccccccccccccccccccccccc$
11	4 $+$ 4 2 6 2 6 2 4 4 4 4 4 4 4 4 4 4
10	40 $0.0000000000000000000000000000000000$
60	00 01000000000000000000000000000000000
90	20 152444480480480 221222812464484645 24 21211221824 1288181 C4008508901C9001468CC48884568854888680C1056C81259868686C0C0
10	1 11731110487 11110757484715757484774777 1775777 1775777 1775777 17757 17757
90	255 8 4 1 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
05	000345000000000000000000000000000000000
04	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
03	1 1 1 1 1 1 1 1 0 0 0 7 7 7 8 8 8 8 9 8 8 8 8 8 8 8 8 8 8 8 8
05	0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
01	000////4448000182004/480/1000028188088198198/9
00	00000000000000000000000000000000000000
Day	203 204 205 206 207 208 208 209 209 209 209 209 209 209 209 209 209

FRS .FKX Hourly distribution of detections

Sunday Monday Tuesday Wednesday Thursday

Friday Saturday Sunday

Friday Saturday

116 117 118 128 128 129 129 130

Thursday

Sum Date

Salah A

day is shown number of detections within each hour of the day, and number of detections for that day. The end statistics give total number of detections The averages show number of processed days, hourly distribution and average Table 3.4.2. Daily and hourly distribution of ARCESS detections. For each distributed for each hour and the total sum of detections during the period. per processed day. (Page 4 of 4)

413 Average weekends

				ay	>		>				Av.	1 >		>	-			;	ָ ק	~	:	~			av.	7 >	٠,	>	.			ay	' >	ı	>			aν	· >		>			ay	· >~	:	>-			av	` >	. ;	>
	ay	S.	clay	esd	Thursday	ay	rday	ay	ay	Tuesday	esd	Thursday	2 2	rdav	; ; ;	7 6	4	Tuesday	מים מים מים	9 2	70	ב המיל פני	7 6	3 2	esd	Thursday	2 >	-1 -1		7 A	day	Wednesda	Thursday	ay	rda	ay.	a y	uay esd	sday	ay	rday	ay v	ar day	-77	sday	ay	rday	ay	מא הקל	Tuesday	sday	ay	aturday
	ınday	dery	"tesda	,egnesd	hur	Friday	Saturd	Sunday	Monday	nes	edn	hur	rid	Saturda	Server S	Monday		֓֞֝֜֝֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֡֓֓֓֓֡֓֓֓֓֓֡֓֡֓֡֓֡֓	֓֞֝֜֝֝֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֓֡֓֓֓֡֓֜֝֡֓֓֓֡֓֜֝֡֓֡֡֡֡֡֓֜֝֡֡֡֓֡֡֡֡֡֡֡֡	THE PER	700000	Sunday	Vonday.	Tuesda	Wednesd	1	Friday	Saturd	Sunday	Monday	ues	edn	hur	Friday	Saturd	Sunday	monday	Wednesd	Thursd	Friday	מב	Sunday	ues	Wednesd	hur	Friday	atu	Sunday	3 6	ega	Thursd	Friday	atn
	0. 10							_					3			אור אור						40	-				7		_	2 2			03 T	_	_	90			O							80,0 E4.0				23 E		in i	n o
	r O												Apr			1.8	3.8		1,6	•	1, 1			1. 5	La		. 5	 		 			ay (May (May	May	May (May]	May	May .	 	May 1	۔ چن	ž, J	ξ.	χ			May		May	May
	K																	<	ζ <	ζ <	ζ <	C <	(<	(4	. ⋖	. 4	7 Z	: <	₹ <	: 4			Σ	Σ	ž:																	ž:	
	21.	21	30	56.	37	30;	42	43	50	500	20	49	27	27	0	9 0	9	n c	2 6	3 5	ų į	167	7	12,00	;	_				26	222	33	173	ñ		•	- è	131	65	63	9	7 7	121	75.	57	32	48	661	א כ ט ג	1	Ī		_
	7	ထ	1	9	29	10	12	11	ထ	10	11	ی ا	o vo	4	۳ «	י יי	٦ -	- 4	3 6	- 6	10	, ;	15	4 0	· C	· C	0	· C	0	,	. 10	13	10	0	0	0	> 4	18	0	10	۰	۶ و	70	2 6	14	12	34	21	ν, c	> 0	0	0	0
	7	S	10	S	27	σ	78	12	10	1	14	, F	30	۳,	<u>،</u> د	4 5	- u	٠,	* 6	- 4	ى د) L	- 0	, c	· C	· C	O	> <	O	V	7	14	6	0	0	0	9	2 6	0	48	4. ı	n ç	2 0	5 6	17	80 9	13	25	ð.	> 0	0	0	0
	œ	ထ	~	~	35	4	18	12	2	~	17	, ~	3 0	۸ ۲۰	٠ ر	٦ ٢	n د	٠,	7 7	ታ ና	9 5	۰ ۵	,	5 0) C	· C	o c	o c	0	ט כ	יא ר	9	12	0	0	0	> ;	77	0	42	m '	ۍ د	70	36	14	S,	16	16	4 C	> 0	0	0	0
	13	0	0	9	S	9	31	10	4	9	17	· ~	, (9 (> <	* 6	٠.	n u	ე ≺	* [- (0 1	- 6) (0	•	O	> <	o c	۳ د	י ס	φ.	12	0	0	0	ې د	1 4	0	17	5	10	0	35	Ü,	9	4	15	4 0 C	> 0	, 0	0	0
	S	σ	ထ	10	4	16	33	14	9	4	10	2	٧ -	٥ د	> <	* 0	א פ	a t	CT Y	•	* 0	٠:	1 5	5	· C	0	O	> 0	> C	οα	o c	10	8			0							4 0					13					0
	10	ထ	ო	10	6	Н	38	19	~	9	7	; (γ α	ט ני	י כ	۰ د	4. (7;	\ T	0 4	•	* 5	2 4	3	0	· <) C	> 0	0	٦ د	۰ σ	4	4	0	0	0	٠,	31 47	0	0	S	ۍ د د	υ 0	43,	17	4	46	21	ຊີ	> 0	· 0	0	0
	۳,	~	33	11	7	0	56	14	m	9	~	9 -	4	۷ ۲	۰ د	٦٢	٠ (α (71	O (n (ر د د	ר י	9 0	· C	> <	> <	0	0	ο σ	ν α	10	9	0	0	0	0 9	107	90	16	σ		ρ Υ		31	9	56	33	φ. Σ	> C	, 0	0	0
	σ	Ξ	4	ထ	7	0	38	10	m	12	2	2	א כ	۳ د	ე (· ·	d (n (7 -	7	> •	4 6	9 0	* 0	C	> <	O	> <	O	ο α	۳ د	11	13	0	0	0	0 (2 0	90	9	17	14	υ r ν r	49	39	10	26	37	ي د	> C	, 0	0	0
	4	~	67	თ	ထ	0	20	16	m	17	34	, ,	3 "	, נ	3 (V	o c	ۍ ر ر	7 .	2 0	۰ د	o u	9	70		۰ د	> <	> <	> <	,	3 00		↤					~	١.	~	\sim	*	or c	വ	-		\sim	42	m				0
	14	œ	23	13	16	0	19	17	~	10	0	3	ט נכ	ې د	7	۰ ر	0 (7	Ú .	4. (,	3 :	10	9 6	3	•	> <	> <	0	א כ	2 6	28	25	0	0	0	0	0 6	3 8	69	16	14	90	36	13	14	40	45	ي د	> C	, 0	0	0
	9	20	6	15	16	7	15	13	18	6	کا ، کا	, נ	3 6	, ,	- '	0 (γ,	25	ָה מ	7 6	"	0 •	-	טַ מַ	, c	> <	> C	> <	> 0	,	77					0		ဝန်	30	9	1	9	9 6	26	3	9	21	0	5	00	0	0	0
	Ŋ	10	σ	16	15	21	11	34	28	15	2	, ,	1 -	100	9	9	53	513	֚֓֞֝֟֓֓֓֞֟֓֓֓֓֟֓֓֓֓֓֟֓֓֓֓֓֓֓֓֡֓֡֓֓֓֓֓֡֓֡֓֡֓֡֓֡֡֡֓֡֓֡֡֡֡֡֡	9 :	`	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	4 5	707	ה ה	> <	> <		> <	> 5	, , ,	17	0	0	0		0	0 6	17.0	95	7	7	25	101	43	34	18	26	40	> C	» O	0	0
	20	11	34	31	42	27	20	32	8	56	3	9 0	7	ט ג ט ג) 	- 8	2	491	žα	2 :	* (u œ	٠.	7 6	-	٥ د	o c	> <	> 0	2 5	77	200	20	0	0	0	0	0 [3 8	81	17	7	6 6 7	081	31	31	28	1 42 2	73	> C	> 0	0	0
	11	23	11	16	26	40	13	21	11	12	5	3 6	3 5	9 5	76	2,0	9	161	Š	3 6	7,	21	`;	444	7	9	> <	> <	> 0	ב כ	γ 7	4ع د	0	0	0	0	0	0 5	108	44	22	17	10	35	53	25	25	41	55	o c	> 0	0	0
	18	21	7	20	22	17	~	11	14	17	::	1 0	, ,	1 -	7	n;	Ξ,	9	. ر	4 (Ç,	ט ע	9	2 6	7.0	> <	> 0	> <	> C	> <	2 4	27	;0	0	0	0	0	ွင	א כי מי	32	32	14	٠ ر	30	2 5	36	20	37	56	5 6	> 0	0	0
	56	14	25	18	21	17	14	14	15	œ	~	1 4	200	9 0	<i>y</i> (7) (ِ ٥	16	77	9 9	÷,	pα	n (76	ק כ	> <	> <	> <	> 0	٦ د	7	2	0	0	0	0	0	0 {	77	26	25	11	14	30	3 1	29	17	22	27	22	> 0	0	0
	2	11	11	15	17	12	13	19	m	· (*)	۳ (,	2 6	ÇŢ	0 1	n c	.n	0	7	د	o c	٠,	0 0	, מ	ט מ	> <	> 0	> 0	> 0	> 5	35	3 6	0	· (*)	0	0	0	9	126	12	21	9 :	11	30		13		28	32	12	> 0	, 0	0
	7	11	ო	9	7	11	ထ	14	4	4	۲.	} =	1 4	9 5	٠,	٦٠	4.	♥ (~) (ν.	4		4.	٥ ;	+ C	> <	> C	> 0	> 0	> u	nα	S	0	, –	0	0	0	0 [7	# 80	~	9	بر بر	20	15	S	14	28	30	11	> 0	, 0	0
	17	~	Ŋ	4	14	œ	ω	25	5	C	ı,	י כ	א כ) <	4, (. .	~	7	~ (0	7	0 (η.	4. (2 0	> <	> 0	> 0	> 0	D	٠ <u>ر</u>	3 6	9 0	· ~	0	0	0	0 ;	÷ 0	0	23	4.	0 {	7 C]	4	11	17	15	13	> 0	, 0	0
	~	N	ო	S	10	17	7	38	, -	C	~	۲ ۲	90	, נ	7	~	5	S,	m (0 (~	7	٠.	4. (0 0	> <	0	> 0	> 0	ָ כ	70	່າ	4	. 4	0	0	0	0 5	7 5	0	25	14	۳ ر	# C	32	10	ထ	37	δ.	16	> 0	0	0
	m	7	7	14	10	18	10	27	, ~	ي .	,	, -	7 5	* (7) (۰ م	4	-1	S (01	n ·	מי מ	n (g	, c	> <	> 0	> 0	> 0	۰ د	ه د	-	4 10	ς α	0	0	0	0 5	7 6	0	18	0		4 7 C	17	13	و ا	16	11	16	> 0	, O	0
	4	Н	9	7	œ	19	10	6	-	4		+ 0	٠ د	٠,	٧,	٦.	4	ω,	သ	- (~	Ę	ი (ρ,	4 €	> 0	> 0	> <	0) C	، ر	י ל	2 6	2	0	0	0	0	9	20	20	S	13	ې د	, 2	7	. ,		16	S C	>	0	0
	9	9	6	ဆ	=	8	4	21	0	, ve	֓֞֝֝֜֜֝֜֝֝֜֜֝֝֜֜֝֜֝֜֜֝֝֜֜֜֝֜֜֝֓֓֜֝֜֝֜֜֜֝֡ ֓֞֓֓֓֞֓֞֓֞֜֞֜֓֞֓֓֞֩֜֞֜֓֓֓֞֜֜֜֓֓֓֡֓֜֡֓֜֡֓֡֓֜֡֓	7 5	<u>,</u>		4. (~ ;	7	m ·	ω ;	<u>.</u>	4.	_	χO I	٠,	ي د	> <	> 0	> 0	-	> 0	× α	* ~	3 0	, ~	0	0	0	01								, œ		10	11	16	> C	, 0	0
	m	~	9	ထ	σ	24	17								v) (m 1	N	10	ഗ	σ, (٠,	ın ı	, ب	٠, ۱	00	> 0	0	٥ (0) (٠.	* "	ی د	o	0	0	0	0	2 م	0	σ	٦,	13	0 0	"	13	6	ω.	6	13	> C	, 0	0
•	91	85	93	94	6	9	67	8	9	100	2 5	7 6	102	507	104	105	106	167	108	109	110	111	717	113	114	CTT	116	11/	118	119	120	121	123	124	125	126	127	128	120	131	132	133	134	136	137	138	139	140	141	142	145 144	145	146

The state of the s

1 + 30 × 100

Sum Date

FIN .FKX Hourly distribution of detections

Ĺ

	٠.		
	21	000000000000000000000000000000000000000	
	20	000000000000000000000000000000000000000	
	19	000000000000000000000000000000000000000	
	18	000000000000000000000000000000000000000	
	11	000000000000000000000000000000000000000	
	16	000000000000000000000000000000000000000	
	15	000000000000000000000000000000000000000	
	14	000000000000000000000000000000000000000	
	13	000000000000000000000000000000000000000	
S	12	000000000000000000000000000000000000000	
ion	11	000000000000000000000000000000000000000	
ecti	10	000000000000000000000000000000000000000	
det	60		
of	90	000000000000000000000000000000000000000	
ő	07	000000000000000000000000000000000000000	
ıti	90	000000000000000000000000000000000000000	
trib	90	000000000000000000000000000000000000000	
13	04	000000000000000000000000000000000000000	
۵ ۲	03	000000000000000000000000000000000000000	
urly	02	000000000000000000000000000000000000000	
오	01	000000000000000000000000000000000000000	
FKX	00	000000000000000000000000000000000000000	
z	برد	CBBOHUMANGCBBOHUMANGCBBOHUMANGCBBOHUMANGCBBOOHUMANGCBBBOOHUMANGCBBBOOHUMANGCBBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMAGGBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMAGGBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMANGCBBOOHUMAGGBBBOOHUMAGGBBBOOHUMAGGBBOOHUMAGGBBBOOHUMAGGBBBOOHUMAGGBBBOOHUMAGGBBOOHUMAGGBBOOHUMAGGBBBOOHUM	

Sum Date

23

38

A A A A A A A A A A A A A A A A A A A	ay y
b b b b b b b b b b b b b b b b b b b	Tuesday Wednesda Thursday Friday Saturday
Sunday Wennesday Wednesday	Tuesday Wednesd Thursda Friday Saturda
0	u u u u u u u ኔ u u u u
Jull Jull Jull Jull Jull Jull Jull Jull	
00000000000000000000000000000000000000	200 261 263 244
000000000000000000000000000000000000000	ON 4 4 ®
000000C0000000000000000000000000000000	11 11 3 3
00000000000000000000000000000000000000	0 0 N W 4
00000000000000000000000000000000000000	08678
00000000000000000000000000000000000000	02220
000000000000000000000000000000000000000	04747
000000000000000000000000000000000000000	13880
000000000000000000000000000000000000000	00400
	00000
00000000000000000000000000000000000000	11 10 10 28 28
00000000000000000000000000000000000000	24 24 26 36
	2440
00000000000000000000000000000000000000	25 25 25 21 21
	22 23 28 26 26
	0 116 26 27
	13 13 13 13
	20 20 5
000000000000000000000000000000000000000	00 6 4 6
00000000000000000000000000000000000000	11000
000000000000000000000000000000000000000	ဝဝဆဝ္ခ
00000000000000000000000000000000000000	00460
000000000000000000000000000000000000000	78500
000000000000000000000000000000000000000	00/84
000000000000000000000000000000000000000	0 0 11 4
00000001111111111111111111111111111111	45978
00000000000000000000000000000000000000	25 25 25 25 25

STATE OF ALL

Sum Date

FIN .FKX Hourly distribution of detections

A CONTROL OF THE PROPERTY OF T

detections
of
distribution
Hourly
. FKX
FIN

Sum Date	138 Sep 16 Sunday 327 Sep 17 Monday 342 Sep 18 Tuesday 200 Sep 19 Wednesday 306 Sep 20 Thursday 225 Sep 21 Friday 765 Sep 22 Saturday 668 Sep 23 Sunday 235 Sep 24 Monday 237 Sep 25 Tuesday 161 Sep 26 Wednesday 111 Sep 27 Thursday 210 Sep 28 Friday 172 Sep 29 Saturday	08035 Wets] cim	Total	429 Average workdays	319 Average weekends
23	50 111 127 144 177 178 178	753	10	10	11
22	11 10 10 10 10 10 10 10 10 10 10 10 10 1	22	1 1	12	11
21	751 147 147 177 177 177 177 177 177 177 17	759	, נו	11	6
20	01100101001010010100010101010101010101	20	11	11	11
19	47 111 101 101 113 113 114 117	19 813	11 11	12	11
18	10 17 17 17 10 10 10 10 10 10 10 10 10 10 10 10 10	16	12	11	12
17	11 11 12 14 14 16 16 16 16 16 16 16 16 16 16 16 16 16	17	12	12	13
16	11 3 3 5 5 6 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	5 16 7 8	30	38	14
15	10 6 6 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	15	19	21	13
14	446 100 100 100 100 100	3 14 15 9 1347	26	32	14
13	133 133 133 133 133 133 133 133 133 133	13	78	34	14
12	22 23 33 33 33 33 33 33 33 34 35 36 37 36 37 37 37 37 37 37 37 37 37 37 37 37 37	1 12 13	30	38	15
1	8 1 2 0 0 1 2 2 3 4 4 6 6 1 2 0 0 1 5 2 3 1 4 6 6 1 7 6 6 1 6 6 6 6 6 6 6 6 6 6 6 6 6	09 10 11 548 2581	36	43	22
10	20020000000000000000000000000000000000	10	36	29	21
60	227 277 277 277 277 277 277 277 277 277	07 08 09 3 42 1548	22	22	21
80	3 6 7 7 7 7 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9	08	20	20	18
07	022 2201 110 22 2406 110 27 20 24 20 24 20 27 20 21 20 21 20 20 21 20 20 20 20 20 20 20 20 20 20 20 20 20	06 07	14	14	15
90	0 6 2 2 4 2 4 2 4 2 4 2 4 2 4 2 4 2 4 2 4	06	10 14	δ	13
05	2000 111 111 111 111 120 130 130 130 130 130 130 130 130 130 13	615	6	7	11
96	1122012224720	04 559	8	9	12
03	4767938667974 636233667974	03 573	່ ∞	ω	9
03	100 100 100 100 100 100 100 100 100 100	02	8 6	٩	6
0.1	0 H H G H H H H H H H H H H H H H H H H	01	11	10	12
00	100 100 100 100 100 100 100 100 100 100	00 01		10	9
Day	259 2600 2600 2662 2663 2664 270 270 270 270	FIN	72	48	24

Table 3.4.3. Daily and hourly distribution of FINESA detections. For each day is shown number of detections within each hour of the day, and number of detections for that day. The end statistics give total number of detections distributed for each hour and the total sum of detections during the period. The averages show number of processed days, hourly distribution and average per processed day. (Page 4 of 4)

3.5 IMS operation

The Intelligent Monitoring System (IMS) was installed at NORSAR in December 1989 and has been operated experimentally since 1 January 1990 for automatic processing of multiple-array data. The current version of IMS processes data from the two-array network consisting of NORESS and ARCESS. Future upgrades of IMS will allow data from additional arrays and single stations to be incorporated.

In general, our routine operation of the IMS during the reporting period has progressed well, and the system has proved to be very powerful and flexible. The well-developed automatic processing combined with very versatile interactive tools has kept the analyst workload at a low level, and in fact only one analyst has been required to handle the regular processing at any time.

Since the IMS is still in an initial stage, there have naturally been some problems of a technical nature, but these have diminished considerably as the system has matured. At the end of the reporting period, the IMS system is running very smoothly.

Table 3.5.1 presents an overview of IMS event processor downtimes. Table 3.5.2 gives a summary of phase detections and processed regional events by IMS. From top to bottom, the table gives the total number of detections by the IMS, the detections that are associated with regional events declared by the IMS, the number of detections that are not associated with such events, the number of regional events declared by the IMS, the number of such events rejected by the analyst, the number of events accepted by the analyst without any changes, and finally the number of events accepted after some sort of modification by the analyst. This last category is divided into three classes: Events where phases (not detected by the IMS) have been added by the analyst, events for which the phase assignments by the IMS have been changed or one or more phase detections have been removed, and events for which the changes by the analyst have amounted to retiming the phases only.

From initial review of the IMS bulletin, it is clear that the final output is of very high quality from a seismological point of view. More detailed evaluation will be conducted at a later stage.

B.Kr. Hokland U. Baadshaug S. Mykkeltveit

The second secon

1990 May 29 14:47:01.000 - 1990 May 30 10:06:07.000 1990 May 30 13:13:30.000 - 1990 May 31 18:30:50.379 1990 Jun 8 14:20:32.713 - 1990 Jun 9 08:00:00.000 1990 Jun 9 12:55:30.000 - 1990 Jun 9 22:30:51.000 1990 Jun 10 11:22:22.752 - 1990 Jun 11 10:00:00.000 1990 Jun 15 13:23:21.700 - 1990 Jun 16 00:00:00.000 1990 Jun 16 13:24:57.500 - 1990 Jun 19 00:00:00.000 1990 Jun 22 20:13:36.000 - 1990 Jun 26 00:00:00.000 1990 Jun 26 03:34:17.000 - 1990 Jun 26 18:27:20.000 1990 Jun 30 10:20:53.800 - 1990 Jul 1 00:00:00.000 1990 Jul 6 07:45:52.000 - 1990 Jul 7 00:00:00.000 1990 Jul 9 17:56:50.500 - 1990 Jul 10 00:00:00.000 1990 Jul 10 23:29:23.700 - 1990 Jul 12 00:00:00.000 1990 Jul 13 13:26:07.600 - 1990 Jul 15 00:00:00.000 1990 Jul 16 16:15:52.800 - 1990 Jul 17 00:00:00.000 1990 Jul 17 09:17:33.300 - 1990 Jul 19 00:00:00.000 1990 Jul 19 21:39:56.200 - 1990 Jul 22 10:56:47.400 1990 Jul 22 20:27:00.000 - 1990 Jul 24 00:24:57.933 1990 Jul 24 09:55:22.500 - 1990 Jul 24 23:35:08.241 1990 Aug 5 05:26:02.840 - 1990 Aug 6 05:18:15.167 1990 Aug 13 20:15:28.400 - 1990 Aug 17 18:00:00.000 1990 Aug 18 20:38:30.200 - 1990 Aug 19 18:00:00.000 1990 Sep 1 05:14:22.800 - 1990 Sep 2 00:00:00.000 1990 Sep 10 04:43:55.100 - 1990 Sep 24 00:00:00.000 1990 Sep 28 09:40:09.800 - 1990 Sep 29 00:00:00.000 1990 Sep 30 10:29:13.300 - 1990 Sep 30 24:00:00.000

Table 3.5.1. IMS event processor (pipeline) downtimes. Logging of time intervals not processed by the event processor (pipeline) started the last week of May. The main reason for these downtimes was slow performance of the event processing, causing loss of waveform data from the disk before the events were processed.

	Apr 90	May 90	Jun 90	Jul 90	Aug 90	Sep 90	total
Phase detections	11843	13988	13178	10989	19267	15402	84667
- Associated phases	1685	2521	1863	1125	2361	1021	10576
- Unassociated phases	10158	11467	11315	9864	16906	14381	74091
Events declared	708	1002	834	493	943	278	4258
- Rejected events	183	196	237	131	218	43	1009
- Accepted events	525	806	597	361	725	235	3249
Unchanged events	85	186	293	172	290	78	1104
Modified events	440	620	304	189	435	157	2145
Phases added	46	63	23	9	30	16	187
Phases changed or removed	281	402	270	180	405	141	1679
Retiming only	113	155	11	0	0	0	279

Table 3.5.2. IMS phase detections and events summary. Statistics for "retiming only" have been compiled only up to June 4.

4 Improvements and Modifications

4.1 NORSAR

NORSAR data acquisition

No modification has been made to the NORSAR data acquisition system.

RD3 digitizers and acquisition equipment have been acquired from Nanometrics

to test recording at one subarray. There are two major tasks that need to be worked upon:

- 1. Solving the problem of getting enough DC current from the central vault to the digitizer at the seismometer.
- 2. Including SDLC communication in the Nanometrics system to get a continuous data stream from the subarray to the NORSAR data processing center. (This is currently not offered by the manufacturer.)

NORSAR detection processing

The NORSAR detection processor has been running satisfactorily on the IBM during this reporting period.

Detection statistics are given in section 2.

NORSAR event processing

There are no changes in the routine processing of NORSAR events, using the IBM system.

4.2 NORESS/ARCESS/FINESA/GERESS

Detection processing

The routine detection processing of the arrays is running satisfactorily on each of the arrays' SUN-3/280 acquisition systems. The same program is used for NORSAR/NORESS/ARCESS/ FINESA/GERESS, but with different recipes. The beam table for NORESS/ARCESS is found in NORSAR Sci. Rep. No. 1-89/90. A new beam table for FINESA is found in Table 4.2.1. This change of the beam table is related to changes in the FINESA array geometry in August. A new vertical sensor was installed at the array center (A0), and horizontal sensors were added at the existing A1 site. Test processing of GERESS data has been started, and the initial beam table is shown in Table 4.2.2.

Event processing. Phase estimation

This process does F-K and polarization analysis for each detection to determine phase velocity, azimuth and type of phase.

The processing using the EP program is now running on the IMS machines, and detections are put into the ORACLE detection data base for use by IMS.

Plot and epicenter determination

A description of single array event processing is found in NORSAR Sci. Rep. No. : -88/89, and NORSAR Sci. Rep. No. 2-89/90.

J. Fyen

BEAM	Velocity	Azimuth	Filter	band	Threshold	Conf	iguration
C011	99999.9	0.0	0.5 -	1.5	4.4	7	С
C02:	99999.9	0.0	1.0 -		4.4	7	C
C031	99999.9	0.0	1.5 -		4.4	7	C
C032	11.0	30.0	1.5 -		4.4	7	C
C033	11.0	90.0	1.5 -	3.5	4.4	7	C
C034	11.0	150.0	1.5 -	3.5	4.4	7	C
C035	11.0	210.0	1.5 -	3.5	4.4	7	С
C036	11.0	270.0	1.5 -	3.5	4.4	7	С
C037	11.0	330.0	1.5 -	3.5	4.4	7	С
C038	15.0	80.0	1.5 -	3.5	3.9	7	С
C039	10.0	20.0	1.5 -	3.5	3.9	7	C
C041	99999.9	0.0	2.0 -	4.0	4.4	7	С
C042	10.2	30.0	2.0 -	4.0	4.4	7	С
C043	10.2	90.0	2.0 -	4.0	4.4	7	С
C044	10.2	150.0	2.0 -	4.0	4.4	7	С
C045	10.2	210.0	2.0 -	4.0	4.4	7	С
C046	10.2	270.0	2.0 -	4.0	4.4	7	C
C047	10.20	330.0	2.0 -	4.0	4.4	7	C
C048	15.0	80.0	2.0 -	4.0	3.9	7	С
C049	10.0	20.0	2.0 -	4.0	3.9	7	С
C051	99999.9	0.0	2.5 -	4.5	4.4	13	BC
C052	8.9	30.0	2.5 -	4.5	4.4	13	BC
C053	8.9	90.0	2.5 -	4.5	4.4	13	BC
C054	8.9	150.0	2.5 -	4.5	4.4	13	BC
C055	8.9	210.0	2.5 -		4.4	13	BC
C056	8.9	270.0	2.5 -		4.4	13	BC
C057	8.9	330.0	2.5 -	4.5	4.4	13	BC
C058	15.0	80.0	2.5 -		3.9	13	BC
C061	99999.9	0.0	3.0 -	5.0	4.4	13	BC
C062	10.5	30.0	3.0 -	5.0	4.4	13	BC
C063	10.5	90.0	3.0 -	5.0	4.4	13	BC
C064	10.5	150.0	3.0 -	5.0	4.4	13	BC
C065	10.5	210.0	3.0 -	5.0	4.4	13	BC
C066	10.5	270.0	3.0 -	5.0	4.4	13	BC
C067	10.5	330.0	3.0 -		4.4	13	BC
C068	15.0	80.0	3.0 -	5.0	3.9	13	BC
C071	99999.9	0.0	3.5 -		4.4	16	ABC
C072	11.1		3.5 -		4.4	16	ABC
C073	11.1	90.0	3.5 -	5.5	4.4	16	ABC

C074	11.1	150.0	3.5 - 5.5	4.4	16	ABC
C075	11.1	210.0	3.5 - 5.5	4.4	16	ABC
C076	11.1	270.0	3.5 - 5.5	4.4	16	ABC
C077	11.1	330.0	3.5 - 5.5	4.4	16	ABC
C081	99999.9	0.0	4.0 - 8.0	4.4	16	ABC
C082	9.5	30.0	4.0 - 8.0	4.4	16	ABC
C083	9.5	90.0	4.0 - 8.0	4.4	16	ABC
C084	9.5	150.0	4.0 - 8.0	4.4	16	ABC
C085	9.5	210.0	4.0 - 8.0	4.4	16	ABC
C086	9.5	270.0	4.0 - 8.0	4.4	16	ABC
C087	9.5	330.0	4.0 - 8.0	4.4	16	ABC
C091	99999.9	0.0	5.0 - 10.0	4.9	16	ABC
C092	10.5	30.0	5.0 - 10.0	4.9	16	ABC
C093	10.5	90.0	5.0 - 10.0	4.9	16	ABC
C094	10.5	150.0	5.0 - 10.0	4.9	16	ABC
C095	10.5	210.0	5.0 - 10.0	4.9	16	ABC
C096	10.5	270.0	5.0 - 10.0	4.9	16	ABC
C097	10.5	330.0	5.0 - 10.0	4.9	16	ABC
C101	99999.9	0.0	8.0 - 16.0	4.9	10	AB
C102	9.9	30.0	8.0 - 16.0	4.9	10	AB
C103	9.9	90.0	8.0 - 16.0	4.9	10	AB
C104	9.9	150.0	8.0 - 16.0	4.9	10	AB
C105	9.9	210.0	8.0 - 16.0	4.9	10	AB
C106	9.9	270.0	8.0 - 16.0	4.9	10	AB
C107	9.9	330.0	8.0 - 16.0	4.9	10	AB
CI01	99999.9	0.0	0.5 - 1.5	2.9	7	C
CI02	99999.9	0.0	1.0 - 2.0	2.9	7	C
CIO3	99999.9	0.0	1.5 - 2.5	2.9	7	C
CI04	99999.9	0.0	2.0 - 4.0	2.5	7	C
CI05	99999.9	0.0	3.5 - 5.5	2.5	7	C
CI06	99999.9	0.0	5.0 - 10.0	2.7	7	C

Table 4.2.1. FINESA beam table. Valid from 1990-237: (25 august 1990), when A0 was included. The table shows name of beam, velocity (km/sec), azimuth (degrees), filter band (Hz), STA/LTA threshold, and configuration. The configuration is described with number of sensors and A, B o: C-rings. The sensor at A0 is included in all configurations. CI01 - CI06 are incoherent beams.

BEAM	Velocity	Azimuth	Filter	band	Threshold	Config	guration
G011	99999.9	0.0	0.5 -		4.5	10	D
G021	99999.9	0.0	1.0 -		4.5	17	CD
G031	99999.9	0.0	1.5 -		4.5	17	CD
G032	11.0	30.0	1.5 -		4.5	17	CD
G033	11.0	90.0	1.5 -		4.5	17	CD
G034	11.0	150.0	1.5 -		4.5	17	CD
G035	11.0	210.0	1.5 -		4.5	17	CD
G036	11.0	270.0	1.5 -			17	CD
G037	11.0	330.0	1.5 -			17	CD
G038	15.8	80.0	1.5 -			17	CD
G039	10.0	30.0	1.5 -			17	CD
G041	99999.9	0.0	2.0 -		4.5	17	CD
G042	10.2	30.0	2.0 -		4.5	17	CD
G043	10.2	90.0	2.0 -		4.5	17	CD
G044	10.2	150.0	2.0 -		4.5	17	CD
G045	10.2	210.0	2.0 -			17	CD
G046	10.2	270.0	2.0 -		4.5	17	CD
G047	10.2	330.0	2.0 -		4.5	17	CD
G048	15.8	80.0	2.0 -			17	CD
G049	10.0	30.0	2.0 -		4.5	17	CD
G051	99999.9	0.0	2.5 -		4.5	22	BCD
G052	8.9	30.0	2.5 -		4.5	22	BCD
G053	8.9	90.0	2.5 -			22	BCD
G054	8.9	150.0	2.5 -		4.5	22	BCD
G055	8.9	210.0	2.5 ~		4.5	22	BCD
G056	8.9	270.0	2.5 -		4.5	22	BCD
G057	8.9	330.0	2.5 -		4.5	22	BCD
G058	15.8	80.0	2.5 -		4.5	22	BCD
G059	10.0	30.0	2.5 -		4.5	22	BCD
G061	99999.9	0.0	3.0 -		4.5	22	BCD
G062	10.5	30.0	3.0 -	5.0	4.5	22	BCD
G063	10.5	90.0	3.0 -	5.0	4.5	22	BCD
G064	10.5	150.0	3.0 -	5.0	4.5	22	BCD
G065	10.5	210.0	3.0 -	5.0	4.5	22	BCD
G066	10.5	270.0	3.0 -	5.0	4.5	22	BCD
G067	10.5	330.0	3.0 -	5.0	4.5	22	BCD
G068	15.8	80.0	3.0 -	5.0	4.5	22	BCD
G069	10.0	30.0	3.0 -	5.0	4.5	22	BCD
G071	99999.9	0.0	3.5 -	5.5	4.5	13	BC
G072	11.1	30.0	3.5 -	5.5	4.5	13	BC
G073	11.1	90.0	3.5 -	5.5	4.5	13	BC

11.1	150.0	3.5 - 5.5	4.5	13	BC
11.1	210.0	3.5 - 5.5	4.5	13	BC
11.1	270.0	3.5 - 5.5	4.5	13	BC
11.1	330.0	3.5 - 5.5	4.5	13	BC
99999.9	0.0	4.0 - 8.0	4.5	13	BC
9.5	30.0	4.0 - 8.6	4.5	13	BC
9.5	90.0	4.0 - 8.0	4.5	13	BC
9.5	150.0	4.0 - 8.0	4.5	13	BC
9.5	210.0	4.0 - 8.0	4.5	13	BC
9.5	270.0	4.0 - 8.0	4.5	13	BC
9.5	330.0	4.0 - 8.0	4.5	13	BC
99999.9	0.0	5.0 - 10.0	5.0	13	BC
10.5	30.0	5.0 - 10.0	5.0	13	BC
10.5	90.0	5.0 - 10.0	5.0	13	BC
10.5	150.0	5.0 - 10.0	5.0	13	BC
10.5	210.0	5.0 - 10.0	5.0	13	BC
10.5	270.0	5.0 - 10.0	5.0	13	BC
10.5	330.0	5.0 - 10.0	5.0	13	BC
99999.9	0.0	8.0 - 16.0	5.0	9	AB
9.9	30.0	8.0 - 16.0	5.0	9	AB
9.9	90.0	8.0 - 16.0	5.0	9	AB
9.9	150.0	8.0 - 16.0	5.0	9	AB
9.9	210.0	8.0 - 16.0	5.0	9	AB
9.9	270.0	8.0 - 16.0	5.0	9	AB
9.9	330.0	8.0 - 16.0	5.0	9	AB
99999.9	0.0	2.0 - 4.0	3.0	8	AC_ne
99999.9	0.0	3.5 ~ 5.5	3.0	8	AC_ne
999.9 ؛	0.0	5.0 - 10.0	3.0	8	AC_ne
99999.9	0.0	8.0 - 16.0	3.0	8	AC_ne
99999.9	0.0	0.5 - 1.5	3.0	10	D
99999.9	0.0	1.0 - 2.0	3.0	8	C
99999.9	0.0	1.5 - 2.5	3.0	8	C
99999.9	0.0	2.0 - 3.0	3.0	8	С
99999.9	0.0	2.0 - 4.0	3.0	8	С
99999.9	0.0	3.5 - 5.5	3.0	8	С
	11.1 11.1 11.1 99999.9 9.5 9.5 9.5 9.5 9.5 9999.9 10.5 10.5 10.5 10.5 10.5 99999.9 9.9 9.9 9.9 9.9 9.9 9.9 9.9 9	11.1 210.0 11.1 270.0 11.1 330.0 99999.9 0.0 9.5 30.0 9.5 90.0 9.5 210.0 9.5 270.0 9.5 330.0 99999.9 0.0 10.5 30.0 10.5 210.0 10.5 270.0 10.5 270.0 10.5 330.0 99999.9 0.0 9.9 30.0 9.9 150.0 9.9 270.0 9.9 270.0 9.9 330.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0 99999.9 0.0	11.1 210.0 3.5 - 5.5 11.1 270.0 3.5 - 5.5 11.1 330.0 3.5 - 5.5 99999.9 0.0 4.0 - 8.0 9.5 30.0 4.0 - 8.0 9.5 90.0 4.0 - 8.0 9.5 210.0 4.0 - 8.0 9.5 270.0 4.0 - 8.0 9.5 270.0 4.0 - 8.0 9.5 270.0 4.0 - 8.0 9.5 330.0 4.0 - 8.0 9.5 370.0 4.0 - 8.0 9.5 370.0 4.0 - 8.0 9.5 330.0 4.0 - 8.0 9.5 270.0 4.0 - 8.0 9.5 330.0 4.0 - 8.0 9.5 330.0 5.0 - 10.0 10.5 30.0 5.0 - 10.0 10.5 150.0 5.0 - 10.0 10.5 270.0 5.0 - 10.0 99999.9 0.0 8.0 - 16.0 9.9 30.0 8.0 - 16.0 9.9 330.0 8.0 - 16.0 9.9 330.0 8.0 - 16.0	11.1 210.0 3.5 - 5.5 4.5 11.1 270.0 3.5 - 5.5 4.5 11.1 330.0 3.5 - 5.5 4.5 99999.9 0.0 4.0 - 8.0 4.5 9.5 30.0 4.0 - 8.0 4.5 9.5 90.0 4.0 - 8.0 4.5 9.5 210.0 4.0 - 8.0 4.5 9.5 270.0 4.0 - 8.0 4.5 9.5 270.0 4.0 - 8.0 4.5 9.5 330.0 4.0 - 8.0 4.5 9.5 330.0 4.0 - 8.0 4.5 9.5 270.0 4.0 - 8.0 4.5 9.5 330.0 4.0 - 8.0 4.5 9.5 330.0 5.0 - 10.0 5.0 10.5 30.0 5.0 - 10.0 5.0 10.5 150.0 5.0 - 10.0 5.0 10.5 270.0 5.0 - 10.0 5.0 10.5 330.0 5.0 - 10.0 5.0 99999.9 0.0 8.0 - 16.0 5.0 9.9 30.0 8.0 -	11.1 210.0 3.5 - 5.5 4.5 13 11.1 270.0 3.5 - 5.5 4.5 13 11.1 330.0 3.5 - 5.5 4.5 13 99999.9 0.0 4.0 - 8.0 4.5 13 9.5 30.0 4.0 - 8.0 4.5 13 9.5 90.0 4.0 - 8.0 4.5 13 9.5 210.0 4.0 - 8.0 4.5 13 9.5 270.0 4.0 - 8.0 4.5 13 9.5 270.0 4.0 - 8.0 4.5 13 9.5 270.0 4.0 - 8.0 4.5 13 9.5 270.0 4.0 - 8.0 4.5 13 9.5 270.0 4.0 - 8.0 4.5 13 9.5 330.0 4.0 - 8.0 4.5 13 9.5 270.0 4.0 - 8.0 4.5 13 9.5 330.0 5.0 - 10.0 5.0 13 10.5 30.0 5.0 - 10.0 5.0 13 10.5 210.0 5.0 - 10.0 5.0

Table 4.2.2. GERESS beam table. Initial test beam set. The table shows name of beam, velocity (km/sec), azimuth (degrees), filter band (Hz), STA/LTA threshold, and configuration. The configuration is described with number of sensors and A, B, C or D-rings. Center A0 is always within the configuration. GH01 - GH04 are incoherent beams using horizontal components of the A2, D1, D4 and D7 three-component stations. GV01 - GV04 are incoherent beams using vertical components. This beam set has been in operation since 1990-294:03.

5 Maintenance Activities

5.1 Activities in the field and at the Maintenance Center

This section summarizes the activities in the field, at the Maintenance Center (NMC) Hamar and NDPC activities related to monitoring and control of the NORSAR, NORESS and ARCESS arrays.

Activities involve preventive and corrective maintenance, and in addition installation and modification of equipment in the field and at the Maintenance Center.

NORSAR

Visits were made to the arrays in connection with adjustment of channel gain and offset SP/LP. Adjustments of LP seismometer mass position (MP) and free period (FP) were made. Cables have been located/pointed out and also repaired/spliced. Subarrays have been visited in connection with loss of power. At the Well Head Vaults (WHVs) RA-5 amplifiers have been replaced. Communication lines have been tested and modems replaced.

NORESS

The NORESS array has been visited in connection with replacement of fiber optical transmitters on the Hub card (site C4). A water leakage was stopped in connection with C2 WHV. In June an AC power failure caused a visit to the central station (Hub). In September a new UPS (Uninterruptible Power Supply) system was installed.

ARCESS

Also here activities have been diverse. An air-conditioner in the central building at the array site has been replaced, and fiber optical transmitters have been replaced on fiber optical links. Fiber optical transmitters/receivers on the Hub 15 card were replaced (site C4). In addition, transmitters/receivers on a DHL 70 card were replaced (site D4). A GS- 13 seismometer was replaced (site D5).

Details are presented in Table 5.1.

Subarray/	Task	Date
area		
NORSAR:	No visits	
NORESS:	Replaced fiber optical transmitters on Hub 15 card	5 April
NMC:	Tested/modified new equipment in connection with extension of the FINESA array	April
NDPC:	Daily check of NORSAR, NORESS, ARCESS and FINESA	April
	status	_
	Weekly calibration of NORSAR SP/LP instruments	
	Continuous measurement of Mass Position and Free	
	Period. Adjusted when outside tolerances	
NORSAR:		
02C	Located faulty SLEM power supply	3 May
01B	Meausrements revealed faulty cable SP02,04	7 May
01B	Cable work SP02,04	14 May
06C	Channel gain and DC offset on all SP/LP	19 May
	channels adjusted	
01B	Cable work SP02,04 terminated	22 May
04C	SP/LP checked	28 May
02C	Power failure stated; electricians from	30 May
	the local power plant had already arrived	
NORESS:	Stopped water leakage to the C2 Well Head	8,9,10
	Vault	May
	Reinstalled equipment, including seismometers	10 May
	C4 repaired	18 May
NDPC:	Daily check of NORSAR, NORESS, ARCESS and FINESA status	May
	Weekly calibration of NORSAR SP/LP instruments	
	Continuous measurement of Mass Position and Free	
	Period	

Table 5.1 Activities in the field and the NORSAR Maintenance Center, including NDPC activities related to the NORSAR, NORESS, ARCESS and FINESA arrays, 1 April — 30 September 1990.

Subarray/	Task	Date
area		
NORSAR:		
02B	A modem was replaced	8 June
	AC failure	19 June
	Gain adjusted on all channels (LTA)	
	DC offset adjusted on all channels	
	"Old" modem reinstalled	22 June
04C	Lost AC power	1 June
06C	AC failure, 2 phases lost	28 June
NORESS:	AC failure	28 June
ARCESS:	Replaced air-conditioner	25,26
	Replaced optical transmitter at remote site D2	June
	Replaced all fiber optical links (to remote sites)	
	Replaced fiber optical transmitters at the Hub	
	15 card, site B1 and B3	
NDPC:	Daily check of NORSAR, NORESS, ARCESS and FINESA status	June
	Weekly calibration of NORSAR SP/LP instruments	
	Continuous measurement of Mass Position and Free	
	Period	
	Adjustment of Mass Position and Free Period when	
	outside tolerances	
NORSAR:		
02B	Visit in connection with loss of power	12 July
	SLEM reset	16 July
02C	Replaced FP/MP centering device EW seism.	4 July
	Cable splicing carried out SP05	10 July
04C	Comm. work in cooperation with NTA/Hamar	3,9 July
	SP02,03 repair	17 July
	Repair of LP EW seismometer	18,19 July
	Gain and offset adjustments all channels SP/LP	20 July
06C	Installed a new RA-5 amplifier SP02	12 July
	Cable work carried out at site D5	16 July
ARCESS:	Replaced fiber optical transm./receiver on	24 July
	Hub 15 card, site 4	uzj
	Reset "white box" communications unit	
	Replaced transm./receiver on DHL 68 card	
	site A0	

Table 5.1 (cont.)

Subarray/	Task	Date
area		
	Replaced DHL 70 card site D4 (vertical channel)	
	Replaced GS13 seismometer at site D5	
NDPC:	Daily check of NORSAR, NORESS, ARCESS and FINESA	July
	status	
	Weekly calibration of NORSAR SP/LP instruments	
	Continuous measurement of Mass Position and Free	
	Period	
	Adjustment of Mass Position and Free Period when	
	outside tolerances	
NORSAR:	Visit in connection with power loss	27 Aug
02B	Cable work	27 Aug
04C	Repaired SP cal. generator	27 Aug
06C	Cable pointed out	31 Aug
FINESA:	NMC staff reinstalled data acquisition unit	20-26
	New channels A0Z, A0Z low channel, A1NS, A1EW	Aug
	installed	
NDPC:	Daily check of NORSAR, NORESS, ARCESS and FINESA	Aug
	status	
	Weekly calibration of NORSAR SP/LP instruments	
	Continuous measurement of Mass Position and Free	
	Period	
	Adjustment of Mass Position and Free Period when	
	outside tolerances	
NORSAR:		
01A	Replaced RA-5, SP02	27 Sep
	Channel gain all SP channels adjusted	
	MP/FP NS and EW LP seismometer adjusted	
04C	Replaced RCD (Remote Centering Device) NS	11 Sep
	LP seismometer	
	Repaired improper connection in the EW data	
	circuit	
06C	Cable SP05 pointed out	7 Sep
	Cable work SP04	10 Sep
	Splicing of cable SP04,05	24 Sep
NORESS:	Installed new UPS system	19-20 Se
	Installation and initialization	26 Sep

Table 5.1 (cont.)

Subarray/ area	Task	Date
NDPC:	Daily check of NORSAR, NORESS, ARCESS and FINESA status Weekly calibration of NORSAR SP/LP instruments. Continuous measurement of Mass Position and Free Period Adjustment of Mass Position and Free Period when outside tolerances	Sep

Table 5.1 (cont.)

5.2 Array status

As of 30 September 1990 the following NORSAR channels deviated from tolerances.

01A 01 8 Hz filter 02 8 Hz filter 04 30 dB attenuator

O.A. Hansen

6 Documentation Developed

48 M. 11. 10 .

- Alsaker, A., L.B. Kvamme, R.A. Hansen, A. Dahle and H. Bungum (1990): The M_L scale in Norway, Bull. Seism. Soc. Am., in press.
- Bungum, H. and A. Alsaker (1990): Source spectral inversion for two earth-quake sequences offshore western Norway, *Bull. Seism. Soc. Am.*, in press.
- Fyen, J. (1990): Diurnal and seasonal variations in the microseismic noise level observed at the NORESS array, *Phys. Earth Planet. Int.*, 63, 252-268.
- Havskov, J., H. Bungum and L.B. Kvamme (1990): The Norwegian regional network and data center operation, *Phys. Earth Planet. Inter.*, submitted for publication.
- Kværna, T. (1990): Sources of short-term fluctuations in the seismic noise level at NORESS, *Phys. Earth Planet. Int.*, 63, 269-276.
- Mitchell, B.J., H. Bungum, W.W. Chan and P.B. Mitchell (1990): Seismicity and present-day tectonics of the Svalbard region, *Geophys. J. Int.*, 102, 139-149.
- Mykkeltveit, S., J. Fyen, F. Ringdal and T. Kværna (1990): Spatial characteristics of the NORESS noise field and implications for array detection processing, *Phys. Earth Planet. Int.*, 63, 277-283.
- Ringdal, F., S. Mykkeltveit, J. Fyen and T. Kværna (1990): Spectral analysis of seismic signals and noise recorded at the NORESS high-frequency element, *Phys. Earth Planet. Int.*, 63, 243-251.
- Semiannual Tech. Summary, 1 Oct 1989 31 March 1990, NORSAR Sci. Rep. No. 1-89/90, Kjeller, Norway.

L.B. Loughran

7 Summary of Technical Reports / Papers Published

7.1 Detection and yield estimation studies

1. Yield estimation using Lg recordings

Over the past several years, extensive research has taken place at NORSAR to develop and evaluate the RMS Lg estimation technique for underground nuclear explosions. Some of the most recent results have been documented by Ringdal and Marshall (1989) and Hansen, Ringdal and Richards (1990).

These studies have so far concentrated on the Shagan River (Semipalatinsk) test site, using data from stations in Norway, Germany, USSR and China (Fig. 7.1.1). By using NORSAR as a reference system, and plotting observed RMS Lg for other factions against NORSAR values, it has been found that the standard deviations of the residuals are consistently as low as 0.03 magnitude units, as shown for selected stations in Fig. 7.1.2. Furthermore, comparing two of the stations with lowest Lg detection threshold (GAM and ARU in the Soviet Union), we have found that this consistency appears to span two full orders of event magnitude, down to approximately $m_b = 4.0$ (Hansen et al, 1990).

A possibility to compare the RMS Lg magnitudes to published yields for Semipalatinsk explosions has now emerged with the recent publication by Soviet scientists quoting yield estimates for a number of such explosions (Bocharov et al, 1989; see also Vergino, 1989a,b). We have made an effort to conduct detailed analysis of available NORSAR Lg data for the explosions in this data set. Since NORSAR is located at more than 4000 km distance from Semipalatinsk, only explosions of more than 10 kt yield will usually provide sufficient SNR for Lg measurements at this station, and even so, it must be noted that at these lower yields, the estimated RMS Lg is less precise than at yields exceeding 50 kt.

Table 7.1.1 gives the NORSAR Lg magnitudes obtained in these analyses. The table comprises altogether 8 explosions from both the Shagan River (Balapan), Degelen Mountains and Konystan (Murzhik) subareas. The NORSAR data for the four largest of these explosions have been previously presented in Ringdal (1989).

Fig. 7.1.3 (top part) shows a plot of NORSAR M(Lg) versus published yields for these 8 explosions. For comparison, the bottom part of Fig. 7.1.3 shows world-wide m_b (UK values as quoted by Vergino, 1989a) versus yield for the same 8 events. The slope in each plot has been restricted to 0.75, and the standard deviation in the vertical direction is 0.043 for M(Lg) and 0.081 for m_b versus log yield. We note that this data set is too small to allow any confident

estimate of the accuracy in estimating yield from M(Lg), especially in view of the aforementioned uncertainty in M(Lg) values for the smaller explosions. Nevertheless, the figure would appear to confirm the potential of RMS Lg as a stable estimator of yields for fully coupled explosions from this region, and indicates that even single station M(Lg) is better correlated to $\log(\text{yield})$ than is world-wide m_b .

2. P-wave detectability studies

Ringdal (1990) has conducted a study of the NORESS array detection capability for Semipalatinsk explosions, both in terms of m_b and yield (Bocharov et al, 1989). In terms of NORESS m_b , the 50 per cent detection threshold is estimated at $m_b = 3.7 \pm 0.1$. A noteworthy feature, illustrated in Fig. 7.1.4, is the large difference in NORSAR m_b bias (S) for the subregions Shagan River (S ≈ 1.0) and Degelen/Konystan (S ≈ 0.4). In terms of world-wide m_b , the estimated NORESS detection threshold, at the 50 per cent level, thus becomes $m_b = 2.7$ and $m_b = 3.3$ for these subareas, respectively.

Fig. 7.1.5 shows NORESS m_b values (measured at the NORSAR seismometer 06C02 which is co-located with the present NORESS center site) versus log yield for 6 low-yield nuclear explosions (the only ones in Bocharov et al (1989) with available data that did not exceed NORSAR's dynamic range). As before, we have used a restricted slope of 0.75 in the magnitude-log yield relationship, and fitted a straight line with this slope to the observed data. The NORESS beam threshold range (plus/minus two standard deviations) is shown as dotted horizontal lines.

Fig. 7.1.5 indicates that, given similar coupling conditions and noise levels as in our data base of 6 explosions, Semipalatinsk explosions of yields at 0.1 kt would be expected to produce detectable signals at NORESS. We note that the 6 reference explosions are all from Degelen or Konystan. In view of the previous discussions, the detectability for Shagan River explosions would be expected to be even better.

In Fig. 7.1.6, we plot NORESS, ARCESS, FINESA and GERESS recordings of an $m_b = 5.7$ nuclear explosion at Novaya Zemlya. The figure shows an unfiltered, single sensor trace for each array, and the signal-to-noise rato on the best array beam (STA/LTA as computed by the online detector) is given in the figure caption. ARCESS has a strong S-phase detection, and there is some S-wave energy visible also for the three other arrays. The Lg phase is not visible on these unfiltered recordings, but in the best filter band, the energy in the Lg window still exceeds significantly the pre-P noise.

From Fig. 7.1.6 it is seen that the P-wave detection capability for Novaya Zemlya explosions is excellent for NORESS, FINESA and ARCESS, in particular the latter. Thus, ARCESS SNR for the event shown was 8383 on the crray beam in the filter band 3-5 Hz. This is more than 3 orders of magni-

tude above the operational threshold, and we note that similar SNR has been observed for the other Novaya Zemlya explosions of similar size recorded at ARCESS (only 4 such events have been recorded since the array came into operation). While this is too limited a data base to give a reliable threshold estimate, a straight extrapolation would indicate that the ARCESS threshold at this site is well below $m_b = 3.0$. NORESS and FINESA also appear to have thresholds close to $m_b = 3.0$, whereas GERESS has a lower detectability for this test site.

3. Conclusions and Recommendations

Our studies confirm that Lg magnitude estimates of Semipalatinsk explosions are remarkably consistent between stations widely distributed in epicentral distance and azimuth. It thus appears that a single station with good signal-to-noise ratio can provide M(Lg) measurements with an accuracy (one standard deviation) of about 0.03 magnitude unit. It is noteworthy that this accuracy is consistently obtained for a variety of stations at very different azimuths and distances, even though the basic parameters remain exactly as originally proposed by Ringdal for NORSAR recordings (0.6-3.0 Hz bandpass filter, RMS window length of 2 minutes, centered at a time corresponding to a group velocity of 3.5 km/s). Moreover, the Lg phase shows considerable promise for use in yield determination, although more data will be needed before the accuracy of Lg-estimated yields can be firmly established.

The excellent detection capability of the regional arrays in northern Europe have been confirmed by case studies, comprising a detailed evaluation of the NORESS capability for Semipalatinsk explosions, and preliminary observations of ARCESS detection of Novaya Zemlya explosions.

Further work will be directed toward additional expansion of these studies, in particular analyzing new data as they become available, and pursuing our analysis of Novaya Zemlya recordings at regional arrays as well as other available stations.

F. Ringdal

References

- Bocharov, V.S., S.A. Zelentsov and V.I. Mikhailov (1989). Characteristics of 96 underground nuclear explosions at the Semipalatinsk test facility, *Atomic Energy*, 673, 210-214 (in Russian).
- Hansen, R.A., F. Ringdal and P.G. Richards (1990). The stability of RMS Lg measurements, and their potential for accurate estimation of the yields of Soviet underground nuclear explosions, *Bull. Seism. Soc. Am.*, Special Issue (in press).
- Ringdal, F. (1989): NORSAR P-wave detection and yield estimation of selected Semipalatinsk explosions, NORSAR Semiannual Tech. Summary, 1 April 30 September 1989, NORSAR Sci. Rep. No. 1-89/90, Kjeller, Norway.
- Ringdal, F. (1990): Teleseismic event detection using the NORESS array, with special reference to low-yield Semipalatinsk explosions, *Bull. Seism. Soc. Am.*, Special Issue, in press.
- Ringdal, F., and P.D. Marshall (1989). Yield determination of Soviet underground nuclear explosions at the Shagan River Test Site, NORSAR Semiannual Tech. Summary, 1 October 1988 31 March 1989, NORSAR Sci. Rep. No. 2-88/89, Kjeller, Norway.
- Vergino, E.S. (1989a). Soviet test yields, EOS, Trans. Am. Geophys. Union, 1511+, November 28.
- Vergino, E.S. (1989b). Soviet test yields, Corrections and Additions, EOS, Trans. Am. Geophys. Union, 1569, December 26.

Date	Region	m _b	NORSAR	Yield
			M(Lg)	(kt)
11/30/69	Shagan (TZ)	6.048	6.043	125
04/25/71	Degelen	6.076	5.862	90
06/06/71	Konystan	5.526	5.44	16
10/09/71	Konystan	5.371	5.25* ⁾	12
10/21/71	Konystan	5.580	5.54	23
02/10/72	Shagan (NE)	5.370	5.37	16
11/02/72	Shagan (SW)	6.224	6.118	165
12/10/72	Shagan (NE)	5.996	6.095** ⁾	140

^{*)} Low precision due to low SNR

Table 7.1.1. Parameters of eight explosions analyzed in this study. Yield estimates are from Bocharov et al (1989), and the m_b values are the "UK m_b " listed in Vergino (1989a).

^{**)} Adjusted for interfering explosion

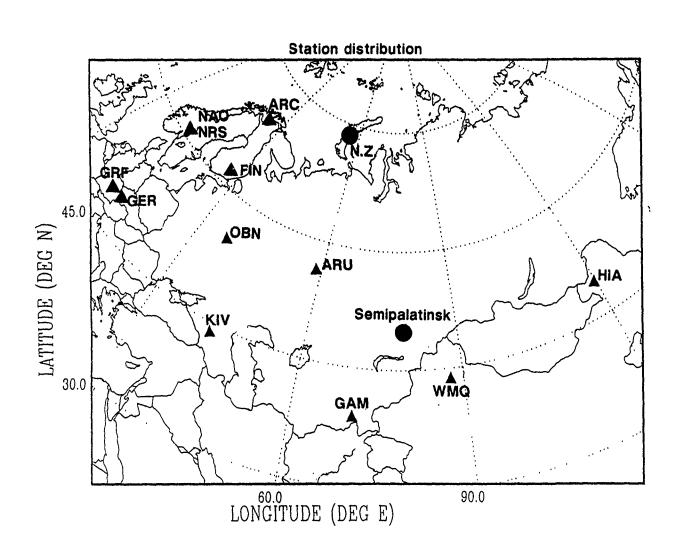


Fig. 7.1.1. Map showing the location of stations analyzed in this study (triangles). The two main USSR test sites (Novaya Zemlya and Semipalatinsk) are marked as filled circles.

RMS Lg comparison

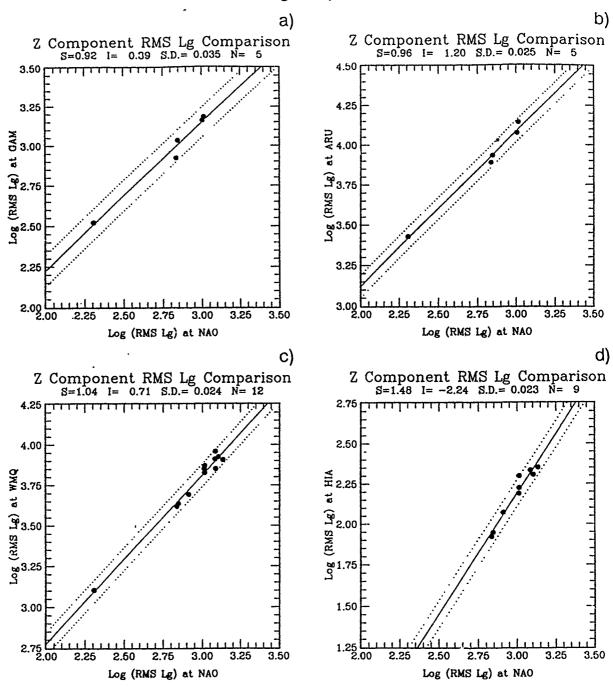
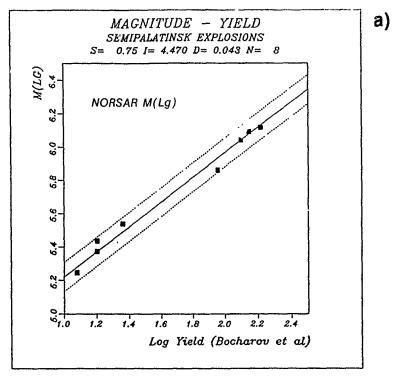


Fig. 7.1.2. Examples of observed correlations between RMS Lg at NORSAR and selected stations in the USSR and China. Note the excellent consistency in all of the plots.



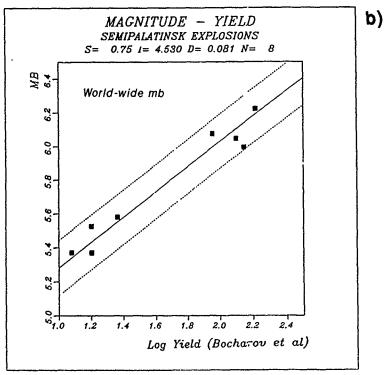


Fig. 7.1.3. Magnitude-yield relationships for 8 nuclear explosions at Semi-palatinsk, with yields provided by Bocharov et al (1989): a) NORSAR M(Lg) versus $\log(\text{yield})$ and b) world-wide m_b versus $\log(\text{yield})$. The slopes of the straight lines have been restricted to 0.75. Note that the NORSAR values show significantly less scatter.

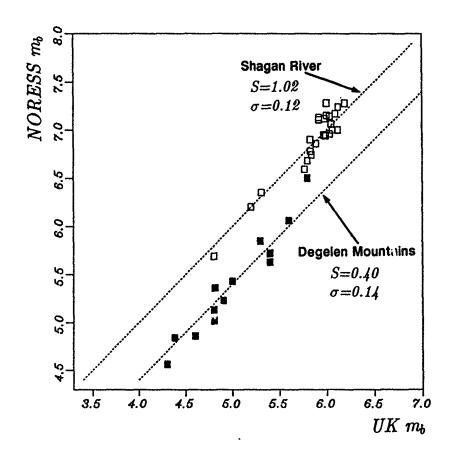


Fig. 7.1.4. Comparison of NORESS and world-wide m_b (as calculated at Blacknest, United Kingdom) for Semipalatinsk explosions. Note the difference in average m_b bias between events from Shagan River (1.0 m_b units) and Degelen Mountains (0.4 m_b units). The straight lines on the plot have a restricted slope of 1.00.

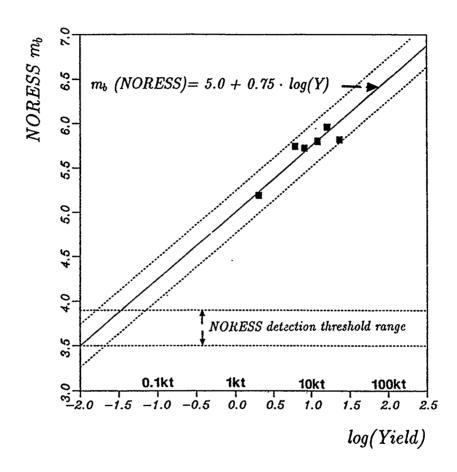


Fig. 7.1.5. Observed m_b versus yield (Bocharov et al, 1989) for six Semi-palatinsk nuclear explosions listed in Table 7.1.1. The straight line has been fitted using a restricted slope of 0.75. The m_b values are based on NORSAR seismometer 06C02, located at the present NORESS center site. The estimated range of the NORESS m_b detection threshold is indicated (see text for details).

Novaya Zemiya nuclear explosion 24 October 1990 - Regional array recordings

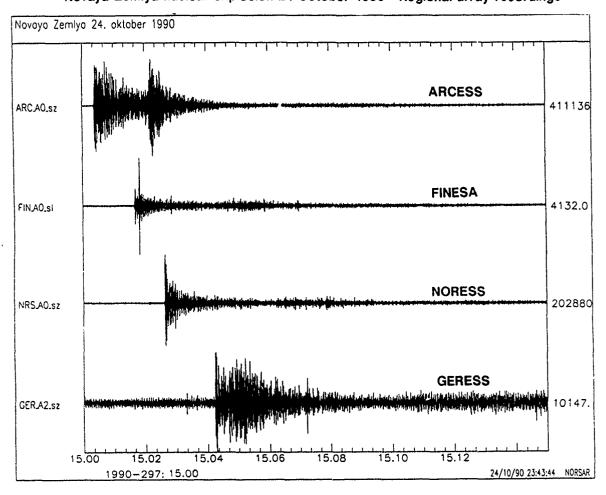


Fig. 7.1.6. Selected single seismometer SPZ recordings from the four regional arrays in northern Europe for the $m_b = 5.7$ nuclear explosion at Novaya Zemlya on 24 October 1990. Epicentral distances and maximum P-phase signal-to-noise ratios on the array beam are as follows:

ARCESS 1110 km, SNR = 8383; FINESA 1780 km, SNR = 2189 NORESS 2270 km, SNR = 2478; GERESS 3380 km, SNR = 105

7.2 Initial results from real-time processing of GERESS array data

Introduction

The GERESS array (Harjes, 1990) represents the most recent addition to the network of regional seismic arrays in Europe. GERESS, which is located in the Bavarian Forest area in southern Germany, has a geometry similar to that of NORESS in southern Norway and ARCESS in northern Norway, but with a slightly enlarged instrument spacing (Fig. 7.2.1). Thus the diameter of GERESS is 4 km, compared to 3 km for the two arrays in Norway.

Real-time data from GERESS are transmitted continuously both to Bochum, Germany (by land line), and to the NORSAR Data Processing Center (NDPC) at Kjeller (by satellite). At NDPC, the data are currently subjected to continuous real-time detection processing, using the RONAPP algorithm (Mykkeltveit and Bungum, 1984). In the near future, these data will also be incorporated into the Intelligent Monitoring System (IMS) (Bache et al, 1990).

GERESS real-time processing

The initial processing of GERESS data is conducted at NDPC using a beam set essentially identical to that being used for NORESS and ARCESS data (see Subsection 3.4). Although several modifications will undoubtedly be desirable after more experience is gained, it is still of interest to observe how a "generic" parameter set performs when applied to a regional array in a new geological environment. Below, we give some initial examples from this processing.

Table 7.2.1 shows excerpts from the automatic GERESS phase detection list for day 293 (23 October 1990). For each phase, the detection time, beam number, SNR, phase velocity and azimuth are listed, together with a number of attributes used in further characterization of the detected phase.

In Fig. 7.2.2 we show an automatically generated event plot (Fyen, 1989) for one of the located events during the time period covered by the detection list in Table 7.2.1. This event is located in the Lubin mining district in Poland, at a distance of 344 km from GERESS, and is probably one of a large number of rockbursts known to occur in that region (Gibowics, 1987). We note that this event was too small to be detected by either NORESS, ARCESS or FINESA.

Fig. 7.2.3 shows GERESS automatic output plot from the P-wave detection of the Novaya Zemlya explosion 24 October 1990 ($\Delta=30.4$ degrees). The phase velocity is indicative of a teleseismic signal, and the estimated azimuth is consistent with the actual epicenter. GERESS SNR is 105 on the array beam, which is naturally lower than for the three other arrays, all of which are within regional distances from Novaya Zemlya.

An interesting feature of the GERESS recordings of this event is a very sharp PcP detection at 2 min 59.5 seconds after P (Fig. 7.2.4). The time differential between P and PcP gives a very sharp constraint on the epicentral distance, in particular when the phase onset times can be read as precisely as in this case. Thus, given appropriate calibration, very useful location information could be derived.

Conclusions

Our initial experience shows that real-time processing of GERESS data will form a very valuable contribution to the regional array monitoring research network. So far, it appears that many new events in southern Europe within 500 km distance from GERESS will be added, and GERESS data will provide further constraints on the events detected and located by more than one array. The teleseismic potential of GERESS is also quite promising.

J. Fyen

References

- Bache, T., S.R. Bratt, J. Wang, R.M. Fung, C. Kobryn and J. Given (1990): The Intelligent Monitoring System, *Bull. Seism. Soc. Am.*, Special Issue, in print.
- Fyen, J. (1989): Event processor program package, . Tech. Summary, 1 Oct 1988 31 Mar 1989, NORSAR Sci. Rep. No. 2-88/89, Kjeller, Norway.
- Gibowics, S. (1987): NORESS capability for detection and location of mining tremors in the Lubin area in Poland, In: Semiannual Technical Summary, 1 September 1986 31 March 1987, NORSAR Sci. Rep. No. 2-86/87, NORSAR, Kjeller, Norway.
- Harjes, H.-P. (1990): Design and siting of a new regional array in central Europe, Bull. Seism. Soc. Am., Special Issue, in print.
- Mykkeltveit, S. and H. Bungum (1984): Processing of regional seismic events using data from small aperture arrays, *Bull. Seism. Soc. Am.*, 74, 2313–2333.


CONTRACTOR CONTRACTOR CONTRACTOR

Table 7.2.1. (Page 1 of 2)

st 21 00:54 1990 FKX GER/GER90293.FKX Pag 3

B3. sz 0.55 1.41 79.68 77.38 A0. sz -1.00 -1.00 -1.00 -1.00 B4. sz -1.00 -1.00 -1.00 -1.00 B4. sz -1.00 -1.00 -1.00 -1.00 B5. sz -1.00 -1.00 -1.00 -1.00 A3. sz -1.00 -1.00 -1.00 -1.00 C1. sz -1.00 -1.00 -1.00 -1.00 A1. sz -1.00 -1.00 -1.00 -1.00 A5. sz -1.00 -1.00 -1.00 -1.00 A5. sz -1.00 -1.00 -1.00 -1.00 B5. sz -1.00 -1.00 -1.00 -1.00 B6. sz -1.00 -1.00 -1.00 -1.00 B7. sz -1.00 -1.00 -1.00 -1.00 B7. sz -1.00 -1.00 -1.00 -1.00 B7. sz -1.00 -1.00 -1.00 -1.00
550 500 500 500 500 500 500 500
1011 11011 11128 11178 1178 1178 1178 11788 11788 11788 11788 11788 11788 11788 11788 1178
1110141800046464646464666666666666666666
31.5 24.5 24.5 19.1 19.1 19.1 10.23 1145 10.23 1145 10.23 1155 10.0 10.
3.3 LG 29.39 P 26.34 PP 5.03 Pgn 9.44 Pgn 9.44 Pgn 13.30 Pgn 13.30 Pgn 13.30 Pgn 15.48 S 12.2 Pois 15.48 S 13.30 Pgn 16.48 P 13.30 Pgn 16.48 Pgn 1
4 wwwwpcrowa awwa awwa awwa awwa awwa awwa awww awww awww awww awwa awwa awwa awa a
1.57 GV02 2.48 GV01 2.98 GV01 0.95 GV01 0.95 GV01 0.95 GV01 1.55 GV01 1.57 GV01
379 293:16.29.14.425 380 293:16.29.18.375 381 293:16.29.18.375 382 293:16.35.18.525 384 293:17.12.59.700 385 293:17.12.59.700 386 293:17.36.39.750 387 293:17.36.39.750 389 293:17.51.19.950 390 293:18.46.16.650 391 293:18.49.08.950 392 293:18.49.08.950 393 293:18.49.08.950 394 293:18.49.12.550 395 293:19.08.01.150 396 293:19.08.01.150 396 293:19.10.00.175 398 293:19.10.00.00.175 398 293:19.10.00.00.175 398 293:19.10.00.00.175 398 293:19.10.00.00.175 398 293:19.10.00.00.175 398 293:19.10.00.00.175 398 293:19.10.00.00.25 400 293:20.00.40.40.450 400 293:20.00.40.40.450 400 293:20.00.40.40.450 401 293:20.10.40.40.955 411 293:22.40.00.225 414 293:23.17.59.375 415 293:23.17.59.375

Table 7.2.1. Automatic event processor detection log for the GERESS array. From left to right the columns give arrival identification number, estimated onset time, difference in seconds between STA/LTA trigger time and onset time, beam name, SNR, velocity in km/sec, phase name, azimuth, broadband FK relative coherence measure and quality of FK (1=good), frequency in Hz of estimated maximum amplitude of the phase, phase maximum amplitude in uncorrected digital counts, STA. The next column with channel names gives, in case of many data gaps, the name of one channel that due to gaps/spikes, etc., may have contributed to a false detection. The four last numbers are result of three-component polarization analysis, and give rectilinearity, horizontal/vertical ratio, angle of incidence 1 and 3. (Page 2 of 2)

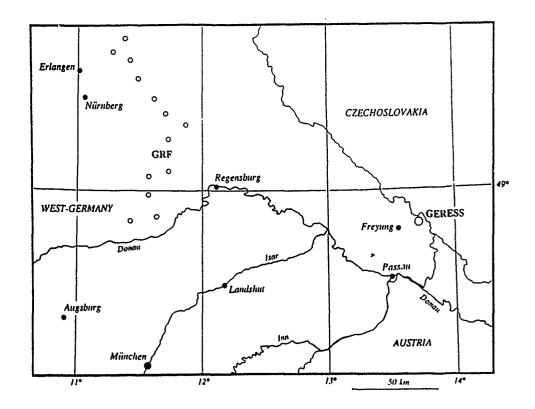

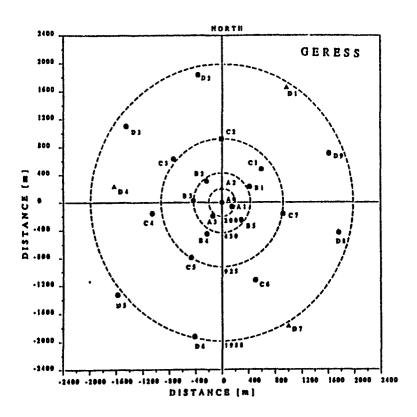


Fig. 7.2.1. Geographical location and geometry of the GERESS array in Germanv (after Harjes, 1990).

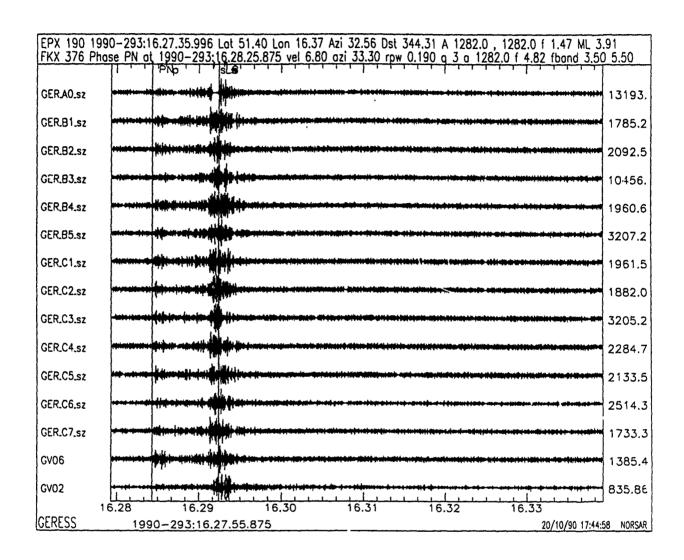


Fig. 7.2.2. Automatically generated event plot for GERESS. The traces shown are a selection of single instruments filtered in the band 3.5-5.5 Hz. The bottom two traces are the P- and S-beams using the velocities and azimuths determined by broadband F-K analysis. (The S-beam, which is the lowermost trace, is filtered in the band 1.0-2.0 Hz). The time window is 6 minutes.

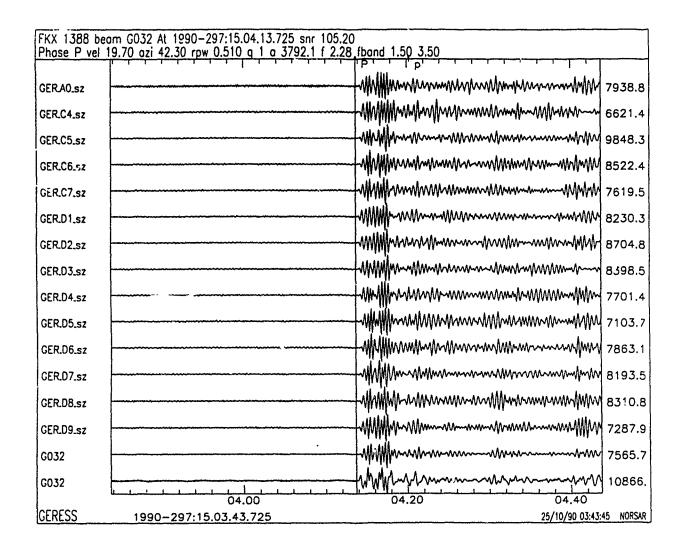


Fig. 7.2.3. Automatically generated teleseismic phase plot for GERESS, corresponding to the P-wave detection of the Novaya Zemlya explosion on 24 October 1990. The traces shown are a selection of single instruments filtered in the band 1.5-3.5 Hz. The bottom two traces are the P-beam filtered and unfiltered, using the velocity and azimuth determined by broadband FK analysis. The time window is 60 seconds.

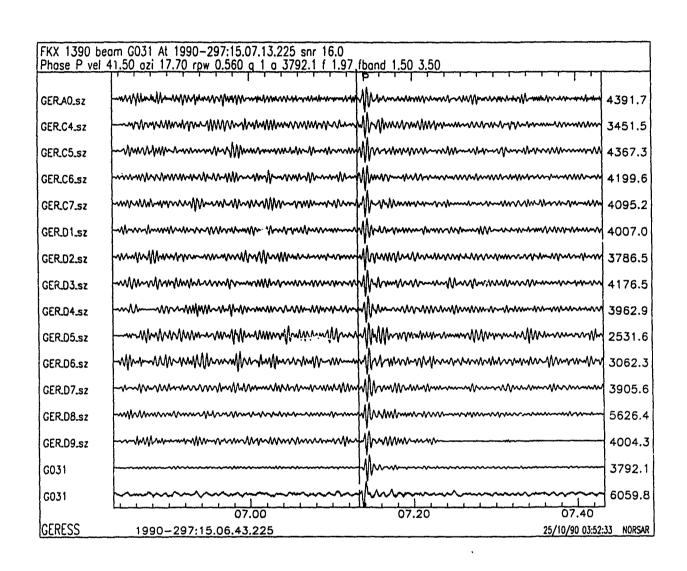


Fig. 7.2.4. Similar to Fig. 7.2.3, but showing the automatic plot for the PcP phase of the Novaya Zemlya explosion. Note the clear onset and the significant noise suppression on the filtered beam (second trace from bottom). Also note that the high estimated phase velocity (41.50 km/s) is a clear indication that this is indeed a core phase.

7.3 Generalized beamforming using a network of four regional arrays

The generalized beamforming method (GBF) for automatic phase association and event location (Ringdal and Kværna, 1989) has now been implemented for processing of data from the four regional arrays, ARCESS, FINESA, GERESS and NORESS. This method works from a list of phase detections for each array. For a large set of hypothetical event locations, GBF searches for a pattern of detections that fit the theoretically expected phase arrivals from the hypothetical locations. When a group of matching detections is found, the event location having the best fit to the data is chosen as the most likely epicenter.

In the following we present a brief report on our initial experience from applying GFB experimentally to the four-array network during a continuous five-day period.

Data analysis

A total of 600 beam grid points with an average separation of 150 km is used to span the geographical area of interest (see Fig. 7.3.1). This grid represents the initial (coarse) set of test locations, and whenever a match is found, a brampacking algorithm with a much denser grid is applied to refine the locations.

The GBF output from a typical 12-hour period is given in Table 7.3.1. For each associated event, the table lists the individual phase detections that either have defined the event or been associated as coda phases (p or s). Phase attributes (SNR, apparent velocity, dominant frequency, etc.) are also listed for each entry.

From Table 7.3.1 we find that the majority of the events are observed by one array only, whereas larger events have phase observations at two or more arrays. This is consistent with earlier studies of two-array and three-array networks.

It is interesting to notice that the incorporation of data from GERESS enables us to obtain more reliable event locations for events in northern Europe, as seen for the event in Poland with origin time 292:21.57.40 and epicenter location 51.70°N, 15.68°E. This event is presumed to be a rockburst in the Lubin mining area, and the location estimate is very close to that site.

In order to evaluate the performance of the method, we have analyzed GBF results from five consecutive working days (10/22/90 - 10/26/90). The results can be summarized as follows:

- 1. Several hundred regional events were associated, where the large majority were detected by one array only.
- 2. A total of 37 events had four or more associated phase detections, and the corresponding locations are shown in Fig. 7.3.2. After inspection we found that all but one of these events were properly associated and located. From Fig. 7.3.2 we see that the large majority of these events are located in the active mining areas of western USSR. We also notice a precise location of a nuclear explosion at Novaya Zemlya.
- 3. The occurrence of incorrect phase associations increases when we allow fewer than four phases to define an event.

Future work

From inspecting phase attributes, the analyst can in many cases identify erroneous phase associations based on inconsistencies among parameters like epicentral distance, apparent velocity and dominant frequency. Our next step will be to compile statistics on such attributes and make this kind of information available to the GBF program for use in the automatic computations.

We have also found that there is a need to refine the travel time models and also to improve the estimation of onset time for the different phase detections. Thereby, the automatic event locations will become even more precise.

Dynamic consistency checks using thresholds computed by the threshold monitoring method are also expected to help in identifying and removing unlikely phase associations. This will be particularly important at the time when detection data from the two three-component systems in Poland will be incorporated into GBF.

T. Kværna

References

Ringdal, F. and T. Kværna (1989): A multichannel processing approach to real time network detection, phase association and threshold monitoring, *Bull. Seism. Soc. Am.*, 79, 1927-1940.

-				
Origin time 1990~202:12.00.03.0	Lat Lon 59.80 27.26	Azres Timres Wres 3.65 2.71 3.63	Nphase 3	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp	Freq Fkq Pol Arid
FIN 194.4 160.1	Pn 12.00.33.3	-0.6 155 1 -5.0	6.4 18.4 752.9	6.07 3 115935
FIN 194.4 160.1	Sn 12.01.07.3	7.1 162.3 2.2	4.4 19.6 1474.2	3.45 3 -2 115936
	Pn 12.01.57.9		10 7 5.3 237 0	3.59 3 115940
Origin time	Lat Lon 50.50 12.11	Azres Timres Wres	Nphase	
1990-292·12.04.36.v	50.50 12.11	0.58 0.43 0.58	2	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp	Freg Fkg Pol Arid
GER 217.0 328.6	Pn 12.05.09.5	-0.6 327.6 -1.0	7.4 13.2 402c.5	9 03 3 181
GER 217 0 328.6	p 12.05.17.1	335.0 7.3	7 9 4.5 831.1	2.69 2 182
GER 217.0 328.6	s 12.05.30.5	330.1 1.5	3 3 12.3 2018.7	1.25 1 -2 183
GER 217.0 328.6	Lg 12.05.37.0	0.2 328.5 -0.1	3.9 3.8 1857.8	2 28 2 184
Origin time	Lat Lon	Azres Timrer Wres	Nphase	
1990-292:12.06.12.0	59.50 24.04	3.52 0.32 1.20	3	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp	Freq Fkq Pol Arid
FIN 244.1 208.2	Pn 12.06.48.9	-0 6 203 1 -5.1	7.1 28 7 754.8	5.48 3 -1 115939
FIN 244.1 208.2	Lg 12.07.20.2	-0 1 206.2 -2.0	4.1 17.0 1227.7	3 23 3 -2 115941
NRS 708.0 95.7	Lg 12.09.29.8	-0.2 99.1 3.4	4.3 3.6 1032.6	1 50 1 -3 115946
NRS 708.0 95.7	s 12.09.32.7	96.0 03	3 7 2.7 834.6	2 12 2 115947
001-1- 11	1 1	Names Misses Wass	Nubaaa	
Origin time 1990-292:12 08.49.0	Lat Lon 59 20 27 52	Azres Timres Wres 2.89 0.35 1 07	Nphase 2	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp	Freq Fkq Pol Arid
FIN 762.6 161.7	Pn 12 09 28 8	0,0 157 8 -3 9	7 3 6.1 306.5	9 90 3 115948
FIN 262.6 161.7	Lg 12.10 03.1	0 7 159 8 -1 9	3.8 4.7 708.1	7 40 3 115949
Origin time	Lat Lon	Azres Timres Wres	Nphase	
1990-292 12.28.03 0	67.60 32 68	2 05 1.11 1 63	3	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp	Freq Fkq Pol Arid
ARC 363.9 123.0	Pn 12.28.56.4	1 1 121.8 -1 2	8.0 90 0 3292.0	4 73 2 115970
ARC 363.9 123.0	p 12 29.04 5	125 5 2 5	7 1 9.6 1945.9	6 38 3 115971
ARC 363 9 123 f	Sn 12.29.35 2	~1 8 118,3 -4.7	3.7 2.5 1338 2	4.72 3 115973
ARC 363.9 123.0	Lg 12.29.44 3	-0.4 122.8 -0.2	3.2 3.8 2015.0	3 25 2 -2 115974
ARC 363 9 123.0	s 12 29 47 5	125.3 2.3	4 3 3.6 3113 7	4 44 2 115975
Origin time	Lat Lon	Azres Timres Wres		
1990-292:12.28 38.0	50.20 14.30	1.97 3.22 3 72	3	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Sar Amp	Freq Fkq Pol Arid
GER 156.8 15.7	Pg 12 29 04 3	1.0 166 09	7.5 4 6 2374.7	9 98 4 187
GER 156.8 15.7	Rg 12.29 22.5	-8 7 12 3 -3.4	3 1 22 7 650 6	1.01 1 3 188
NRS 1186 2 170.4	Sn 12.33.08.1	0 1 172.0 1.6	4.3 2.5 409.1	4.49 3 115982
NRS 1186.2 170 4	s 12.33 12 3	173.7 3.3	3 9 11.9 1522 1	3 95 2 -1 115985
a 1.1. 14.				
Origin time 1990-292 12.30.18.0	Lat Lon 50 80 12.59		Nphase 3	
			-	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp	Freq Fkq Pol Arid
GER 231.8 340.2	Pn 12.30 55 6	1.6 325.8 -14 4	6 3 7 7 3574 5	8 32 3 190
GER 231.8 340.2		-11 8 330.2 -10 0	3 0 8 6 1874 4	1 60 1 -3 192
NRS 1108 7 176.2	Pn 12.32.40 9	-0.1 173 8 -2.4	6.7 5.3 280 3	4 13 3 115978


Table 7.3.1. GBF output from a typical 12-hour period. For each associated event, the table lists the individual phase detections that either have defined the event (Pn, Sn, Lg, Rg) or been associated as coda phases (p or s). Phase attributes (SNR, apparent velocity, dominant frequency, etc.) are also listed for each entry. (Page 1 of 3)

Origin time 1990-292:12.31 08.0	Lat Lon 56.20 26.39	Azres Timres Wres 11.07 3.89 6.66	Nphase
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp Freq Fkq Pol Arid
FIN 584.9 178.1 FIN 584.9 178.1	Pn 12.32.28.5 p 12.32.56 1	1.2 155.4 -22.7 185.0 6.9	9.4 4.5 77.3 4.56 3 115980 7 1 32.1 1286.9 3.91 1 115984
FIN 584.9 178.1 NRS 1000.7 113.8	Sn 12.33 24.0	-6.4 180.3 2.2 7.1 99.4 -14.4	4.5 8.7 767.9 2.38 1 -2 115986 3.4 2.7 660.2 2.35 2 115991
GER 1185.3 41.6	Lg 12.35.55.0 Pn 12.33.39.4	-0.9 46.6 5.0	3.4 2.7 660.2 2.35 2 115991 6.2 9.1 143 9 4.49 4 193
Origin time 1990-292:12.31.45.	Lat Lon 0 67 60 32.47	Azres Timres Wres 2.34 1.17 1.75	Nphase 4
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp Freq Fkq Pol Arid
ARC 390.1 119.8 ARC 390.1 119.8	Pn 12.32.40.0 p 12.32.46.3	-0.5 122.5 2.7 121.6 1.8	7.6 202.2 18647.9 6.78 1 115977 8.5 4.2 1185.3 3.09 3 115979
ARC 390.1 119.8 ARC 390.1 119.8	p 12.32.50.5	117.8 -2.0	7.4 2.8 1568.1 8.43 4 115983
ARC 390.1 119.8	Lg 12 33.34.6	0.4 118.2 -1.6	3.2 7.8 11233.4 2.86 2 115990
ARC 390.1 119.8 NRS 1302.7 44.8	s 12.33.39.0 Pn 12.34.32.1	120.4 0.6 0.5 44.7 -0.1	4.8 5.4 10591.9 3.67 2 115994 8.4 4.0 265.2 3.35 3 115988
1110			21.0
Origin time 1990-292:12.35.44.	Lat Lon 0 61.00 29.03	Azres Timres Nres 4.27 2.23 3.29	
Sta Dist Az FIN 166.4 106.0	Ph Time Pn 12.36.09.8	Tres Azim Ares -1.1 117.9 11 9	Vel Snr Amp Freq Fkq Pol Arid 6.6 29.3 3083 2 6.99 3 -1 115989
FIN 166.4 106.0	Lg 12.36.29.2	-1.3 102.0 -4.0	4.0 25.2 1883.8 1.85 1 -2 115992
FIN 166.4 106.0 NRS 948.8 80.6	Rg 12 36.37 7 Pn 12.37.46.5	-2.7 111 3 5.3 -1.0 83.3 2 7	3.4 10.9 4734.5 1.24 1 115993 11.4 8.9 730.2 6 35 2 115995
NRS 948.8 80.6	Lg 12.40.07.4	-2 0 80.5 -0 1	4.6 2.6 835.6 1 36 2 115997
NRS 948.8 80.6	s 12,40,12 6	77.5 -3.1	4.1 3.9 1353 3 1.90 1 116001
ARC 966.4 168.6 ARC 966 4 168.6	Pn 12.37 51.7 Sn 12.39.27.9	2.0 169 2 0.6 1 2 162.5 -6 1	9 1 9.9 466.4 5.42 2 115998 4 7 3 0 402.9 4 30 2 116000
ARC 966.4 168.6	Lg 12.40.07.8	-6.5 172.0 3.4	3 5 2.8 695 1 2.41 2 -3 116002
Origin time 1990-292 13.18 05.	Lat Lon 0 59.50 27.85	Azres Timres Wres 5 0 83 0.19 0.39	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp Freq Fkq Pol Arid
FIN 237.7 155.0	Pp 13.18.41.7	0 0 154 4 -0 6	6.8 7 1 204.3 8 91 3 116032
FIN 237 7 155.0	Sn 13.19.12.4	0.3 153.9 -1.1	3.8 5.0 563 3 7 06 3 -2 116033
Origin time 1990-292:13.36.54.	•		3
Sta Dist Az FIN 227.4 198.1	Ph Time Pn 13.37.30.0	Tres Azim Ares 0.6 191 0 -7.1	Vel Snr Amp Freq Fkq Pol Arid 7 8 16.5 392.4 3 37 1 116045
FIN 227.4 198 1	Lg 13.37.56 3	-1 4 193.0 -5.1	4.0 23.2 1195 6 2.83 1 -2 116046
NRS 750.8 94.7	Lg 13 40 24.1	0 0 83 1 -11.6	4 1 2.5 533.1 2 58 2 116050
Origin time 1990-292:13.49.09	Lat Lon 0 60 40 29.68	Azres Timres Wres 3 1 23 0.47 0.7,	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp Freq Fkq Pol Arid
FIN 227.6 119.2 FIN 227.6 119.2		-0.4 118.6 -0.6 121 2 2 0	7.1 6.6 460.8 9.0 3 1 116071 4.1 5.8 769 0 5.57 3 -3 116073
FIN 227.6 119 2		-0 6 117.3 -1.9	3.1 3.9 444.4 1.14 1 -3 116074
Origin tim? 1990~292 14.24.30.	Lat Lon 0 57.40 6 13	Azres Timres Wres 3 10.65 1.13 3 79	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp Freq Fkq Pol Arid
NRS 484 2 222.2 NRS 484 2 222 2		-0.8 211.3 -10.9 -0.5 224.7 2.5	9.0 10.8 635.0 8 20 1 1 116090
NRS 484.2 222.2	5 14 26.47.9	221.6 -0 6	4.1 3.2 954 8 2.56 1 116093
GER 1077.6 334.9	Sn 14.28 39.2	2 1 353 5 18.6	4.0 3.6 175 5 1.54 4 1 218
Origin time 1990-292 14 33 35.	Lat Lon 0 48 40 30.43	Azres Timres Wres 2 5 87, 0 22 1 69	
Sta Dist Az	Ph Time	Tres Azim Ares	Vel Snr Amp Freq Fkq Pol Arid
FIN 1478 5 167.3 NRS 1825 2 130 3		0 0 155.6 -11 7 -0.4 130 3 0.0	8.4 6.5 94.6 4.32 3 116095 10.1 5.8 197.2 4.71 3 116095
MAS 1023 2 130)	EU 17 3/.27./	- V-1 130 3 0.0	10 1 3.0 17/ 2 4 /1 3 11609 ·

Table 7.3.1. (Page 2 of 3)

	Origin t -292·14.			Lat 4.60	Lon 37.82	Azre 4.4		es Wres	Nphase 2	•				
Sta	Dist	λz	Ph	Ti	me	Tres	Azim	Ares	Vel	Snr	Amp	Freq	Fkq Pol	Arid
ARC ARC	766.1 766.1	130.0 130.0	Pn		6.32.8 7.52.6		131.8	1.8 -7.1	8.3	5.5 2.8	131 2 285 2	8.81 8 16	3	116109
ARC	760.1	130.0	30	14 4/	. 32.6	0.1	122.9	-7.1	4.4	2.8	260 2	8 16	3 1	116111
	0-4-4- A			• • •	7	1	- m/							
	Origin t -292:14.			Lat 9.90	Lon 12.11	Azre 4.2			Nphase 2	•				
									_					
Sta GER	Dist 164.9	Az 316.0	Ph Pn		ime 5.55.2	Tres -0.4	Azim 310.5	Ares -5.5	Vel	Snr	Amp	Freq	Fkq Pol	Arid
GER	164.9	316.0	Lg	14.57		0.6	319.0	3.0	6.9 4 2	3.0 72	1375.0 1416.7	7.64 4 18	3 -2	221 222
			•											
	Origin t	ime		Lat	Lon	Azre	s Timr	es Wres	Nphase					
	-292:15.			9.20	11.31	2.6			2					
Sta	Dist	λz	Ph	T	lwe	Tres	Azim	λres	Vel	Snr	Amp	Freq	Fkq Pol	Arid
NRS	171.7	184.5	Pn	16.00	0.11.8	0.2	185.3	0.8	7.0	13 6	462.6	4 38	1	116126
NRS	171.7	184.5	Sn	16 00	34.5	-0 8	180.1	-4.4	3.9	4.7	864 1	9.00	3 -3	116127
1000	Origin t -292:16.	ime		Lat 19.60	Lon 11.64	Azre 5.5		es Wres	Nphase)				
1990	-292:10.	09.30.0	1	13.60	11.04	3.5	i5 0.2	29 1.68	2					
Sta	Dist	AZ	Ph		me	Tres	Azim	λres	Vel	Snr	Amp	Freq	Fkq Pol	Arid
GÉR GER	171.9 171.9	300 0 300.0	Pn La	16 10	0.25 2 0.46.0	-0.5 -0.1	289.5 300.6	-10.5 0.6	6.5 4.0	4.0	800.7 758 0	9 71 4 95	4	228 229
Juli	2,2,,	300.0	~3	20.20		•.•	500.0	0.0	1.0	3.3	730 0	1 ,,	,	447
	Origin t			Lat	Lon	Azre		es Wres	Nphase					
	-292.20.		6	0 70	21.82				приа зе	,				
Sta	21-4		n.	-				•				_		
FIN	Dist 244.7	A2 252 1	Ph Pn	20.46	Lme 5.553	Tres	Azim 261.7	Ares 9.6	Vel 87	Snr 57	Амр 115.6	Freq 4 22	Fkq Pol	Arid 116244
FIN	244 7		Sn	20 47	7.27.1		253 2	1.1	4 6	3 8	241 1	4.66	3 -3	116245
	Origin t	ime		Lat	Lon	Azre	s Timz	res Wres	Nphase	•				
	Origin t -292:21.		5	Lat 51.70	Lon 15.68	Azre 4.2			Nphase 6	•				
			s Ph	1.70	15.68		23 1.7	70 2.75	¯ 6		Amo	Frea	Fka Pol	Arıd
1990 Sta GER	-292:21. Dist 347 5	57.40.0 Az 23.2	Ph Ph	51.70 Ti 21.58	15.68 ime 3 30.3	4.2	3 1.7 Azim 29 3	70 2.75 Ares 6.1	Vel 8,9	Snr 64.9	Amp 2858 7	Freq 2 75	Fkq Pol	Arid 253
1990 Sta GER GER	-292:21. Dist 347 5 347.5	57.40.0 Az 23.2 23.2	Ph Pn P	51.70 Ti 21.58 21.58	15.68 ime 3 30.3 3.38 2	4.2 Tres	3 1.7 Azim 29 3 25.0	70 2.75 Ares 6.1 1 8	Vel 8.9 6.4	Snr 64.9 17.3	2858 7 3017.5	2 75 2 64	1 1	253 254
1990 Sta GER	-292:21. Dist 347 5	57.40.0 Az 23.2 23.2 23.2 23.2	Ph Ph	51.70 Ti 21.58 21.58 21.58	15.68 ime 3 30.3	4.2 Tres	3 1.7 Azim 29 3	70 2.75 Ares 6.1	Vel 8,9	Snr 64.9	2858 7 3017.5 4004.7	2 75 2 64 2 49	1 1 1 1 3	253 254 255
1990 Sta GER GER GER GER GER	-292:21. Dist 347 5 347.5 347 5 347 5 347 5 347.5	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 23.2	Ph Pn P P Lg	51.70 Ti 21.58 21.58 21.58 21.59	15.68 ime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5	4.2 Tres 0 0	Azim 29 3 25.0 25 6 26 2 29 8	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6	Vel 8.9 6.4 6.3 4.2 5.3	Snr 64.9 17.3 8 7 3 4 3 2	2858 7 3017.5 4004.7 8589.2 4114.4	2 75 2 64 2 49 2.27 1 00	1 1 1 1 3 1 1 3	253 254 255 257 258
1990 Sta GER GER GER GER GER NRS	-292:21. Dist 347 5 347.5 347 5 347 5 347.5 1038.4	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9	Ph Pn P Lg s Pn	51.70 Ti 21.58 21.58 21.58 21.59 21.59	15.68 ime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5 9.54 8	4.2 Tres 0 0	Azim 29 3 25.0 25 6 26 2 29 8 166 3	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4	Vel 8.9 6.4 6.3 4.2 5.3 8.3	Snr 64.9 17.3 8 7 3 4 3 2 17.1	2858 7 3017.5 4004.7 8589.2 4114.4 383 9	2 75 2 64 2 49 2.27 1 00 3.42	1 1 1 1 3 1 1 3 1	253 254 255 257 258 116282
1990 Sta GER GER GER GER GER	-292:21. Dist 347 5 347.5 347 5 347 5 347 5 347.5	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 163.9	Ph Pn P P Lg	51.70 21.58 21.58 21.58 21.59 21.59 22.00 22.01	15.68 ime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5 9.54.8 9.04.8 1.38.5	4.2 Tres 0 0 8 0 0 4 -0 4	Azim 29 3 25.0 25 6 26 2 29 8	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6	Vel 8.9 6.4 6.3 4.2 5.3	Snr 64.9 17.3 8 7 3 4 3 2	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6	2 75 2 64 2 49 2.27 1 00 3.42 4.02	1 1 1 1 3 1 1 3	253 254 255 257 258 116282 116283
1990 Sta GER GER GER GER NRS NRS NRS	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0	Ph Pn P P Pn	51.70 21.58 21.58 21.58 21.59 21.59 22.00 22.00	15.68 ime 3.30.3 3.38.2 3.43.8 9.25.2 9.38.5 9.54.8 9.04.8 1.38.5 9.21.3	4.2 Tres 0 0 8 0 0 4 -0 4 0.3	Azim 29 3 25.0 25 6 26 2 29 8 166 3 162 3 167 9 217,4	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8 9.8	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 78	1 1 1 3 1 3 1 1 1 2 1	253 254 255 257 258 116282 116283 116284 116281
1990 Sta GER GER GER GER NRS NRS NRS	Pist 347 5 347.5 347 5 347 5 347 5 347 5 1038.4 1038.4 1038.4	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0	Ph Pn P Lg s Pn P Sn	51.70 21.58 21.58 21.58 21.59 21.59 22.00 22.00	15.68 ime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5 9.54.8 9.04.8 1.38.5	4.2 Tres 0 0 8 0 0 4 -0 4	Azim 29 3 25.0 25 6 26 2 29 8 166 3 162 3 167 9	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116283 116284
Sta GER GER GER GER NRS NRS NRS FIN	-292:21. Dist 347 5 347.5 347 5 347.5 347.5 1038.4 1038.4 1038.4 1256 7	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 215.0	Ph Pn P Lg Sn Pn Sn Sn	51.70 T1 21.58 21.58 21.59 21.59 21.59 22.00 22.00 22.00	15.68 ime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5 9.54 8 9.04.8 1.38 5 9.21.3 2 26 0	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1	Azim 29 3 25.0 25 6 26 2 29 8 166 3 162 3 167 9 217.4 207 5	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5	Vel 8.9 6.4 6.3 4.2 5.3 9.7 4.8 9.8 4.9	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 78	1 1 1 3 1 3 1 1 1 2 1	253 254 255 257 258 116282 116283 116284 116281
Sta GER GER GER GER NRS NRS FIN FIN	-292:21. Dist 347 5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 Origin t	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 163.9 215.0 215.0	Ph Pn P Lg Sn Pn Sn Sn	51.70 Ti 21.58 21.58 21.59 21.59 21.59 22.00 22.00 22.00	15.68 lime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5 9.54 8 9.04.8 1.38 5 9.21.3 2 26 0	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1	Azim 29 3 25.0 25 6 26 2 29 8 166 3 162 3 167 9 217.4 207 5	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8 9.8 4.9	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 78	1 1 1 3 1 3 1 1 1 2 1	253 254 255 257 258 116282 116283 116284 116281
Sta GER GER GER GER NRS NRS NRS NRS 1990	-292:21. Dist 347 5 347 5 347 5 347 5 347 5 347 5 1038.4 1038.4 1038.4 1256.7 Origin t -292-23	Az 23.2 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 215.0 215.0	Ph Pn P Pg Sn Pn Sn Sn	51.70 21.58 21.58 21.59 21.59 22.00 22.00 22.00 22.00 22.00	15.68 ime 3 30.3 3,38 2 3 43.8 3 25.2 9.38.5 9.54 8 0.04.8 1.38 5 9.21.3 2 26 0	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1	Azim 29 3 25.0 25.6 26 2 29 8 166 3 167 9 217.4 207 5 Time 3 2 2	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8 9.8 4.9 Nphase	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 78	1 1 1 3 1 3 1 1 1 2 1	253 254 255 257 258 116282 116283 116284 116281
Sta GER GER GER GER NRS NRS FIN FIN	-292:21. Dist 347 5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 Origin t -292.23 Dist	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 ime 36.38 0	Ph Pn P P Lg S Pn Pn Sn Pn Sn Pn Sn	51.70 Ti 21.58 21.58 21.59 21.59 22.00 22.00 22.00 22.00	15.68 ime 3 30.3 3.38 2 3 43.8 9.25.2 9.38.5 9.54 8 9.04.8 1.38 5 9.21.3 9.21.3 9.21.3 9.21.3 9.21.3 9.21.3	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2	Azim 29 3 25.0 25 6 26 2 29 8 166 3 162 3 167 9 217.4 207 5 Azim	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8 9.8 4.9 Nphase	Snr 64.9 17.3 8 7 3 2 17.1 4.5 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5	2 75 2 64 2 49 2 .27 1 00 3 .42 4 .02 2 .27 3 78 2 .84	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116283 116284 116286
Sta GER GER GER GER NRS NRS NRS NRS 1990	-292:21. Dist 347 5 347 5 347 5 347 5 347 5 347 5 1038.4 1038.4 1038.4 1256.7 Origin t -292-23	Az 23.2 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 215.0 215.0	Ph Pn P Pg Sn Pn Sn Sn	51.70 21.58 21.58 21.58 21.59 21.59 22.00 22.00 22.02	15.68 ime 3 30.3 3 38 2 3 43.8 9.25.2 1.38.5 9.26 0 Lon 19 99 ime 7.20 6 7.25 5	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1	Azim 29 3 25.0 25.6 26 2 29 8 166 3 167 9 217.4 207 5 Time 3 2 2	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8 9.8 4.9 Nphase	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 78 2.84	1 1 1 1 3 1 1 1 2 1 1	253 254 255 257 258 116282 116284 116286 Arid 116311
1990 Sta GER GER GER NRS NRS FIN FIN 1990 Sta ARC ARC	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 215.0 215.0 ime 36.38 0 Az 233.4 233.4 233.4	Ph P P P S P P P P P P P P P P P P P P P	51.70 T1 21.58 21.58 21.59 21.59 22.00 22.00 22.00 Lat 57.90	15.68 ime 3 30.3 3.38 2 3 43.8 3.25.2 3.43.8 3.25.2 3.43.8 3.25.2 3.38.5 9.54.8 3.04.8 3.22.6 0 Lon 19 99 Lme 7.20 6 7.25 5 7.46.9	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4	Azim 29 3 25.0 25.6 26.2 29 8 166.3 162.3 217.4 207.5 25.5 Timz 2.5 Azim 225.4 221.7	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8 -11 7	Vel 8.9 6.4 4.2 5.3 9.7 4.8 9.8 4 9 Nphase Vel 7.4 6.7	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 78 2.84 Freq 6 11 4.11 3.67	1 1 1 1 1 3 1 1 3 1 1 1 1 2 1 1 1 1 1 1	253 254 255 257 258 116282 116284 116281 116286 Arid 116311 116312 116313
1990 Sta GER GER GER NRS NRS FIN 1990 Sta ARC ARC	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7 288.7	57.40.0 Az 233.2 233.2 233.2 233.2 235.2 163.9 163.9 163.9 215.0 215.0 215.0 Az 233.4 233.4 233.4 233.4	Ph P P P S P S P P P P P P S P S P S P S	51.70 Ti 21.58 21.58 21.59 21.59 22.00 22.00 22.02 Lat 57.90 Ti 23.37 23.37 23.37	15.68 ime 3.30.3 i.38.2 3.43.8 9.25.2 3.43.8 9.25.4 9.04.8 1.38.5 9.04.8 1.38.5 9.04.8 1.39.5 9.04.8 1.30.6 1.00.0	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4	Azim 29 3 25.0 25.6 26.2 29 8 166.3 162.3 162.3 162.3 162.3 217.4 207.5 Azim 225.4 221.6 221.7 225.4 221.6 221.8	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 ces Wres 4 09 Ares -8 0 -11 8 -11 7 -5.6	Vel 8.9 6.4 6.3 4.2 8.3 9.7 4.8 9.8 4.9 Nphase 5.7 7.4 6.7 7.1 6.7	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3	2 75 2 64 2 49 2.27 1 00 3.42 2.27 3 78 2.84 Freq 6 11 4.11 3.67 3 61	1 1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116283 116284 116286 Arid 116311 116312 116313 116313
1990 Sta GER GER GER NRS NRS NRS NRS NRS NRS ARC ARC ARC ARC ARC ARC	~292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7 288.7 788.7 788.7	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4	Pho P P S P S P P P P P S L S P S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L L S L L L S L L L L S L	51.70 21.58 21.58 21.58 21.59 22.00 22.00 22.00 22.00 22.00 23.37 23.37 23.37 23.37 23.37	15.68 lime 3.38.2 3.43.8 9.25.2 9.238.5 9.54.8 1.04.8 1.28.5 9.54.8 1.28.5 9.54.8 1.28.5 9.54.8 1.28.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.6 1.38	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2 5 4.7 -3.4	Azim 29 3 25.0 25.6 26.2 29 8 166.3 167.9 217.4 207.5 **S. Time 221.7.4 221.6 221.7.8 225.4 221.8 3.46.2 3	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8 -11 7 -5.6 -8.1 5 5	Vel 8.9 66.4 66.3 4.25 8.3 9.7 4.8 9.8 4 9 Nphase Vel 7.4 6.7 15.0 4.1	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6 Snr 55.2 7.3 4 15 2 3 0 3 0	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3 2834 8 198.6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 2.84 Freq 6 11 4.11 3.67 3 61 1 42 1 79	1 1 1 1 1 3 1 1 3 1 1 1 1 2 1 1 1 1 1 1	253 254 255 257 257 258 116282 116284 116284 116286 Arid 116311 116312 116313 116314 116315 116315
1990 Sta GER GER GERS NRS NRS NRS NRS NRS NRS ARC ARC ARC ARC	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7 288.7 288.7	57.40.0 Az 231.2 23.2 23.2 23.2 23.2 2163.9 163.9 163.9 215.0 215.0 215.0 Az 233.4 233.4 233.4 233.4 233.4	Pho P P S P P P P P P P P P S P S P P P P	51.70 21.58 21.58 21.58 21.59 22.00 22.00 22.00 22.00 22.00 23.37 23.37 23.37 23.37 23.37	15.68 ime 3 30.3 3,38 2 3 43.8 3.25.2 3 43.8 3.25.2 3 63.25.2 3 12.3 2 26 0 Lon 19 99 Lme 7.20 6 7.25 5 7.46.9 5.33 4 5.33 4	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4	Azim 29 3 25.0 25.6 26.2 29 8 166.3 167.9 217.4 207.5 25.4 221.6 221.7 227.8 221.7 227.8	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres -8 0 -11 8 -11 7 -5.6 -8.1	Vel 8.9 66.4 66.3 4.23 8 3 9.8 9 9.8 4 9 Nphase Vel 7.4 6.7 7 1 6 4.0	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6 Snr 55.2 7.3 2 4 15.2 3 .0	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3 2834 8	2 75 2 64 2 49 2.27 1 00 3.42 2.27 3 78 2.84 Freq 6 11 4.11 3.67 3 61 1 42	1 1 1 3 1 3 1 1 2 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 257 258 116282 116283 116286 116286 Arid 116311 116312 116313 116314 116314
1990 Sta GER GER GER NRS NRS NFIN FIN 1990 Sta ARC ARC ARC ARC NRS NRS	~292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7 288.7 288.7 788.3 3896.3	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 215.0 215.0 Az 233.4 233.4 233.4 233.4 233.4	Pho P P S P S P P P P P S L S P S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L S L L L L S L L L S L L L L S L	51.70 21.58 21.58 21.58 21.59 22.00 22.00 22.00 22.00 22.00 23.37 23.37 23.37 23.37 23.37	15.68 lime 3.38.2 3.43.8 9.25.2 9.238.5 9.54.8 1.04.8 1.28.5 9.54.8 1.28.5 9.54.8 1.28.5 9.54.8 1.28.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.6 1.38	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2 5 4.7 -3.4	Azim 29 3 25.0 25 6 26 2 29 8 166 3 167 9 217.4 207 5 Azim 225 4 221 6 221.7 225 4 221 6 221.7 3 46 2 3 3 3 46 2	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 ces Wres 4 09 Ares -8 0 -11 8 7 -5.6 -8.1 5 9.0	Vel 8.9 66.4 66.3 4.25 8.3 9.7 4.8 9.8 4 9 Nphase Vel 7.4 6.7 15.0 4.1	Snr 64.9 17.3 8 7 3 4 3 2 17.1 4.5 3 7 23.8 2 6 Snr 55.2 7.3 4 15 2 3 0 3 0	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3 2834 8 198.6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 2.84 Freq 6 11 4.11 3.67 3 61 1 42 1 79	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 257 258 116282 116284 116284 116286 Arid 116311 116312 116313 116314 116315 116315
1990 Sta GER GER GER NRS NRS FIN 1990 Sta ARC ARC ARC ARC FIN NRS	~292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 1256.7 Origin t ~292.23 Dist 288.7 288.7 788.7 288.7 776.3 896.3	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 163.9 215.0 215.0 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4 233.4 340.7 23.3	Pho P P P P P P P P P P P P P P P P P P	51.70 21.58 21.58 21.58 21.59 21.59 22.00 22.01 22.02 22.02 Lat 67.90 Tri 23.37 23.37 23.37 23.37 23.38	15.68 lime 3:38.2 3:43.8 9.25.2 9.38.5 9.54.8 9.04.8 1.38.5 9.04.8 1.38.5 9.26.0 Lon 19.99 lime 7.20.6 1.25.5 1.46.9 1.11.7 3.34.8	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2 5 4.7 -3.4 -0.4 Azre	Azim 29 3 25.0 25 6 26 2 6 2 6 2 6 2 6 2 6 2 6 2 6 2 6 2	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8 -11 7 -5.6 -8.1 5 5 9.0	Vel 8.9 6.4 6.3 8.3 9.7 4.8 9.8 4.9 Nphase 5 Vel 7.4 6.7 1.0 4.1 8.3 Nphase	Snr 64.9 17.3 8 7 3 4 3 2 17.15 3 7 23.8 2 6 Snr 55.2 7.3 2 4 15 2 3.0 3.0 5.4	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3 2834 8 198.6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 2.84 Freq 6 11 4.11 3.67 3 61 1 42 1 79	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 257 258 116282 116284 116284 116286 Arid 116311 116312 116313 116314 116315 116315
1990 Sta GER GER GER NRS NRS FIN 1990 Sta ARC ARC ARC ARC FIN NRS	~292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7 288.7 288.7 788.3 3896.3	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 163.9 215.0 215.0 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4 233.4 340.7 23.3	Pho P P P P P P P P P P P P P P P P P P	51.70 21.58 21.58 21.58 21.59 21.59 22.00 22.00 22.00 22.00 23.37 23.37 23.37 23.38	15.68 ime 3.38.2 3.43.8 9.25.2 9.38.5 9.54.8 9.04.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.5 9.54.8 1.38.3 1.38.3 1.38.3 1.38.3 1.38.3 1.38.3 1.38.3 1.38.3	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2 5 4.7 -3.4 -0.4	Azim 29 3 25.0 25 6 26 2 6 2 6 2 6 2 6 2 6 2 6 2 6 2 6 2	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8 -11 7 -5.6 -8.1 5 5 9.0	Vel 9 6.4 6.4 6.3 4.2 5.3 8 9.7 4.8 9.8 9 .7 4.8 6.7 7.4 8.8 4 9 Vel 6.7 7.4 8.3	Snr 64.9 17.3 8 7 3 4 3 2 17.15 3 7 23.8 2 6 Snr 55.2 7.3 2 4 15 2 3.0 3.0 5.4	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3 2834 8 198.6	2 75 2 64 2 49 2.27 1 00 3.42 4.02 2.27 3 2.84 Freq 6 11 4.11 3.67 3 61 1 42 1 79	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 257 258 116282 116284 116284 116286 Arid 116311 116312 116313 116314 116315 116315
Sta GER GER GER NRS NRS FIN FIN 1990 Sta ARC ARC ARC ARC STON NRS 1990 Sta	-292:21. Dist 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 Origin t -292:23 Dist 288.7	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4	Pho P P P P P P P P P P P P P P P P P P	11.70 Ti 21.55:21.	15.68 lime 3:38 2 3:43.8 2.25.2 3:43.8 3:25.2 3:48.5 3:48.5 3:48.5 3:26.0 Lon 19.99 lime 7.20.6 7.46.9 7.46.9 3:34.8 Lon 20.04 lime	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2.5 4.7 -3.4 -0.4 Azre 1.5	Azim 29 3 25.0 25 6 26 2 29 8 166 3 167 9 217 4 207 5 Azim 225 4 221 6 221 7 227 8 3 32 2 3 32 3 3 32 3 3 32 3 3 32 3 3 346 2 3 32 3 3 32 3 3 32 3	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 0 -11 8 -11 7 -5.6 -8.1 5 5 9.0 res Wres 2.90 Ares	Vel 8.9 6.4 6.3 4.2 5.3 8.3 9.7 4.8 9.8 4.9 Nphase Vel 4.1 8.3 Nphase 3	Snr 64.9 17.3 8 7 3 4 3 2 17.15 3 7 23.8 2 6 Snr 555.2 7.3 4.5 7.3 2 3.0 3 0 5.4	2858 7 3017.5 4004.7 8589.2 4114.4 383.9 245.6 417.7 195.6 695.8 762.6 234.6 198.6 114.1	2 75 2 64 2 49 2 27 1 00 3 42 4 02 2 2.27 3 78 2 .84 Freq 6 11 4 .11 3 .61 1 79 3 45 Freq	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116283 116284 116281 116313 116311 116312 116313 116314 116315 116309
1990 Sta GERR GERR GERR GERN NRSN NRSN FIN 1990 Sta ARC ARC ARC ARC FIN NRS	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 1256.7 Origin t -292.23 Dist 288.7 288.7 76.3 896.3 Origin t -292.23 Dist 3896.3	57.40.0 Az 23.2 23.2 23.2 23.2 163.9 163.9 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4	Pho p p s s s s s s s s s s s s s s s s s	11.70 21.55 21.55 21.55 21.55 21.55 21.55 22.00 22.00 22.00 22.00 22.00 23.33 23.33 23.33 23.34 23.34	15.68 ime 3.38.2 3.43.8 2.25.2 3.38.5 9.54.8 0.04.8 0.04.8 0.04.8 0.21.3 0.26.0 Lon 19.99 ime 7.20.6 7.25.5 7.46.9 7.33.4 0.11.7 3.34.8	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2.5 4.7 -3.4 -0.4 Azre 1.5	3 1.7 Azim 293.0 25.6 26.2 29.8 166.3 162.3 167.9 207.5 25.4 207.5 25.4 221.7 227.8 3.3 2.2 Azim 225.4 221.7 227.8 3.3 46.2 3.3 46.2 3.3 46.2 3.3 48.5 Timz 2.5 Azim 4.2 2.5 3.3 4.2 2.5 3.3 4.2 2.5 3.3 4.2 3.3 4.2 2.5 4.2 2.5 3.3 4.2 3.3 4.3 3.3 4.3 4.3 4.3 4.3 4.3 4.3 4.3	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 1 4 0 2 4 -7 5 res Wres -8 0 -11 8 -11 7 -5.6 -8.1 5 5 9.0 Ares 0 6 Ares 0 6	Vel 8.9 6.4 6.3 5.3 8.7 4.8 4.9 Nphase Vel 7.4 6.7 1 5.0 4.0 4.1 8.3 Nphase Vel 4.0 4.1 8.3 Vel 4.0 4.1 8.3 8.3 8.3 8.4 9.7 8.4 8.4 8.4 8.4 8.4 8.4 8.4 8.4 8.4 8.4	Snr 64.9 17.3 8 7 3 2 17.15 3 .7 23.8 2 6 Snr 55.2 7.3 2 4 15 2 3.0 3.0 5.4	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 175.6 695 8 762 6 2346 3 2834 8 198.6 114.1	2 75 2 64 2 49 2 27 1 00 3 42 4 02 2 27 3 78 2 .84 Freq 6 11 1 42 1 79 3 45 Freq 6 33	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116283 116284 116286 Arid 116311 116312 116313 116314 116315 116310 116309
Sta GER GER GER NRS NRS NRS FIN 1990 Sta ARC	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 1256.7 Origin t -292.23 Dist 288.7 288.7 288.7 776.3 896.3 Origin t -292.23	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 234.6 224.6	PPD PPS PD PPS LLP PPPPPPPPPPPPPPPPPPPPP	11.70 Ti 21.55 21.55 21.55 21.55 21.55 21.55 22.20 22.00 22.00 22.00 Lat 17.90 Ti 23.33 23.33 23.33 23.33 23.33 23.33 23.33 23.33 23.33 23.33 23.33	15.68 ime 3.38.2 3.43.8 9.25.2 9.25.2 9.246.8 9.04.8 1.38.5 9.04.8 1.38.5 9.104.8 1.26.0 Lon 19.99 1.20.6 7.25.5 7.46.9 7.53.4 1.03.4 1.11.7 8.34.8	Tres 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2.5 4.7 -3.4 -0.4 Azre 0 4	Azim 29 3 25.0 25.6 26.2 29 8 166.3 167.9 207.5 Timz 221.7 227.8 221.6 221.7 227.8 223.3 ES Timz 225.3 34.6 2.5 2.3 2.3 ES Timz 225.3 2.3 ES Timz 225.3 2.3	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8 -11 7 -5.6 -8.1 5 5 9.0 Ares 2.90 Ares 6 4 3 2.22	Vel 8.9 6.4 6.3 4.2 5.3 8 9.7 4.8 9.8 9.7 4.8 9.7 4.8 9.7 4.1 8.3 Vel 7.3 7.3 8.3 Vel 7.3 7.3 8.3 Vel 8 Vel 8.3 Vel 8 V 8 Vel 8 Vel 8 Vel 8 Vel 8 V 8 Vel 8 Vel 8 V 8 Vel 8 Vel 8 V	Snr 64.9 17.3 8 7 3 4 3 2 17.15 3 7 23.8 2 6 Snr 7.3 2.4 15 2 3.0 5.4	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 202 5 Amp 1175.6 695 8 762 6 2346 3 2834 8 198.6 114.1	2 75 2 64 2 49 2.27 3 .42 4 .02 2 .27 3 .78 2 .84 Freq 6 11 4 .11 3 .61 1 .79 3 .45 Freq 6 33 5 .94	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116283 116284 116281 116313 116311 116312 116313 116314 116315 116309
Sta GER GER GER GER NRS NRS NRS FIN 1990 Sta ARC	-292:21. Dist 347.5 347.5 347.5 347.5 347.5 347.5 1038.4 1038.4 1038.4 1256.7 1256.7 Origin t -292.23 Dist 288.7 776.3 896.3 Origin t -292.23. Dist 3::7 735.3	57.40.0 Az 23.2 23.2 23.2 23.2 23.2 163.9 163.9 163.9 215.0 215.0 215.0 ime 36.38 0 Az 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 233.4 223.4 224.6	Pho P P S P S P P P P P P P P P P P P P P	11.70 21.55 21.55 21.55 21.55 21.55 21.55 22.20 22.00 22.00 22.00 22.00 23.33 23.34 23.34 23.34 23.44 23.44 23.44 23.44	15.68 ime 3:38.2 3:43.8 9.25.2 9.38.5 9.54.8 9.04.8 1.38.5 9.04.8 1.38.5 9.04.8 1.38.5 9.04.8 1.38.5 9.10.4 1.9.99 ime 7.20.6 1.25.5 1.46.9 1.1.7 1.34.8 Lon 20.04 ime 3:21.2 3:21.2	4.2 Tres 0 0 8 0 0 4 -0 4 0.3 1.1 Azre 7.2 Tres -0 4 -2.5 4.7 -3.4 -0.4 Azre 1.5	Azim 29 3 25.0 25.6 26 2 29 8 166 3 167 9 207 5 Timz 2217.4 207 5 Azim 225 4 221 6 221 7 221 7 227 8 3 3 4 6 2 3 3 2 3 2 3 2 2 2 3 2 3 2 3 3 4 6 2 3 3 2 3 2 3 2 2 2 2 2 2 3 2 2 2 2 2	70 2.75 Ares 6.1 1 8 2 4 3 0 6.6 2 4 -1 6 4 0 2 4 -7 5 res Wres 29 4 09 Ares -8 0 -11 8 -11 7 -5.6 -8.1 5 5 9.0 res Wres 0 6 -4 3	Vel 8.9 6.4 6.4 6.3 8.3 8.3 9.7 4.8 9.8 4.9 Nphase 5.7 1.5 0.4 1.1 8.3 Nphase 3.7 7.3	Snr 64.9 17.3 8 7 3 4 3 2 17.15 3 7 23.8 2 6 Snr 55.2 7.3 4 15 2 3.0 5.4	2858 7 3017.5 4004.7 8589.2 4114.4 383 9 245.6 417 7 195 6 695 8 762 6 2346 3 2834 8 198.6 114.1	2 75 2 64 2 49 2 27 1 00 3 402 2 27 3 78 2 .84 Freq 6 11 4 .11 3 61 1 1 79 3 45 Freq 6 33 5 04	1 1 1 1 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	253 254 255 257 258 116282 116284 116286 116286 116311 116312 116313 116314 116315 116310 116309


Table 7.3.1. (Page 3 of 3)

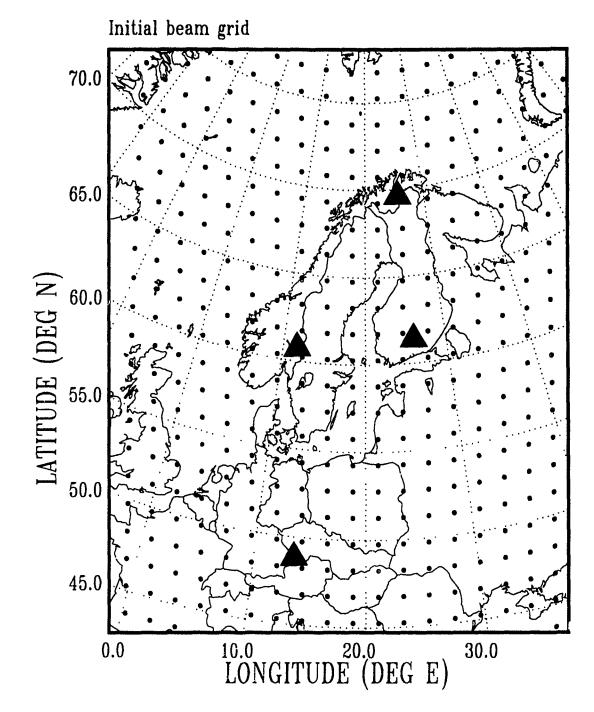

Mop projection: LAMBERT EQUAL AREA, AZIMUTHAL

Fig. 7.3.1. Initial beam grid used by the generalized beamforming method when processing data from four regional arrays. ARCESS, FINESA, NORESS and GERESS are marked with solid triangles.

Events located by two or more arrays

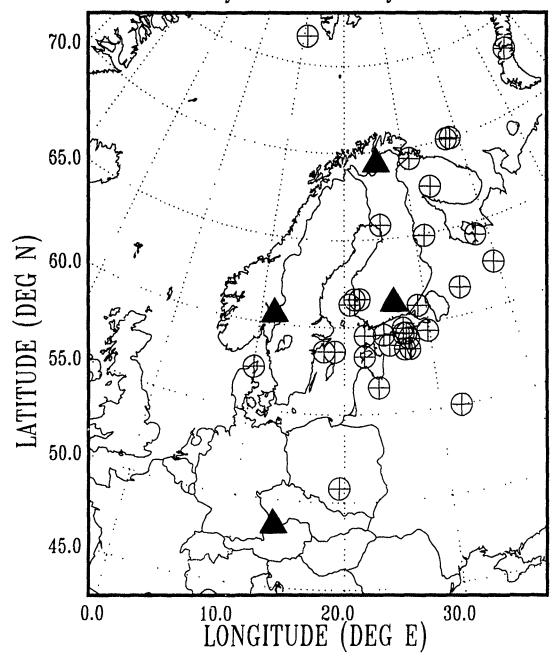

Map projection: LAMBERT EQUAL AREA, AZIMUTHAL

Fig. 7.3.2. Events located by GBF having four or more associated phase detections. The data cover the five-day period 22-26 October 1990. Out of a total of 37 events, 12 were located by two arrays, 22 by three arrays and 3 by four arrays. The four regional arrays, ARCESS, FINESA, NORESS and GERESS, are marked with solid triangles.

7.4 Continuous threshold monitoring of the Novaya Zemlya test site

Introduction

The continuous threshold monitoring technique (Ringdal and Kværna, 1989) represents a new approach toward achieving reliable seismic monitoring for the purpose of verifying nuclear test ban treaties.

Traditionally, seismic monitoring has relied upon applying signal detectors to individual stations within a monitoring network, associating detected phases and locating possible events in the region of interest. This procedure has been accompanied by assessments of network capabilities for the target region, usually by applying statistical models for the noise level distribution, introducing station corrections for signal attenuation and devising a combinational procedure to determine the detection threshold as a function of the number of phase detections required for reliable location.

The statistical noise models used in these capability assessments are not able to accommodate the effect of interfering signals, such as the coda of large earthquakes, which may cause the estimated thresholds to be quite unrealistic at times. Furthermore, only a statistical capability assessment is achieved, and no indication is given as to particular time intervals when the possibility of undetected clandestine explosions is particularly high.

The continuous threshold monitoring technique alleviates all of these problems. It makes it possible to ascertain, at any point in time, for a given target region, the maximum magnitude of a possible clandestine explosion at a predefined level of confidence. This makes it possible to focus attention upon those specific time intervals when realistic evasion opportunities exist, while retaining confidence that no treaty violation has occurred at other times.

Application to the Novaya Zemlya test site

In order to demonstrate how such monitoring could be performed in a practical operational situation, we have conducted an experiment during which we have applied continuous threshold monitoring to the Novaya Zemlya test site for a full one-week period. Our data base has been the Fennoscandian regional array network (NORESS, ARCESS, FINESA). As illustrated in Fig. 7.4.1, these three arrays are all within regional distances from the test site, with excellent P-phase detection capabilities (Fig. 7.4.2). The ARCESS array also detects S phases from Novaya Zemlya explosions quite well, whereas NORESS and FINESA have a lower S-phase detection capability.

The parameters used in the threshold monitoring experiment are given in Table 7.4.1. For each array, we steer "optimum" P and S beams towards the test site, and calibrate these beams using actually observed signal attenuation

from Novaya Zemlya explosions. By focusing in this way on the target region, we can at any point in time measure the "noise magnitude" for a given phase at a given array, and combine these data to obtain a network threshold as explained in detail by Ringdal and Kværna (1989).

Results

Figs. 7.4.3-7.4.9 show the result of the monitoring experiment. Each of these figures covers one data day, starting 24 October 1990. The upper three traces of each figure represent the thresholds (i.e., 90 % upper magnitude limits) obtained from the three individual arrays, whereas the bottom trace illustrates the network threshold. Typically, the individual array traces have a number of significant peaks for each 24-hour period, due to interfering events (local or teleseismic). On the network trace, the number and sizes of these peaks are greatly reduced, because an interfering event will usually not provide matching signals at all the stations. From probabilistic considerations, it can in such cases be inferred that the actual network threshold is lower than these individual peaks might indicate.

On each of the one-day figures, we have included comments explaining the presence of the most significant peaks on the network trace. Here, we will just note that the first day, 24 October 1990, was the day of an actual nuclear explosion ($m_b = 5.7$) on Novaya Zemlya, and this event naturally stands out on the plot. While the peak value of the network threshold plot does not represent the actual magnitude of the event, it is in fact quite close (5.64).

As a general comment to Figs. 7.4.3-7.4.9, we note that such plots, which are easily generated by the Intelligent Monitoring System (IMS) (Bache et al, 1990), will enable the analyst to obtain an instant assessment of the actual threshold level of the monitoring network. The peaks on the network traces may be quickly correlated with the IMS detection bulletin, in order to decide whether they originate from interfering events or from events in the target region.

Discussion

In a monitoring situation, it will be important to isolate and analyze more extensively those time intervals which offer significant evasion opportunities. Table 7.4.2 gives a statistic of the number of occasions during which the upper magnitude limit exceeded a given level. In theory, if this limit is, e.g., at 3.0, it might be possible that a clandestine $m_b = 3.0$ explosion had occurred without being detected. There are many options available to investigate such a hypothesis in more detail, although we have not attempted to do so in this study. The most immediate approach would be to analyze high-frequency signals for the time interval being considered. For example, on ARCESS records Novaya Zemlya explosions will contain significant energy at 10 I/z and above, even at magnitudes well below 3.0. Teleseismic events, even of large m_b , will

not contain much energy at these frequencies and thus it might be possible to obtain additional indications from these data.

To assess interfering phases from events at regional distances is more difficult, since the high-frequency energy might not discriminate such events from Novaya Zemlya explosions. In such cases, additional procedures, such as maximum likelihood beamforming, might become useful to suppress signals from the interfering event and thereby obtain a more realistic estimate of the signal energy arriving from the target region.

It is significant that the 3-array network studied in this paper can monitor the Novaya Zemlya test site down to m_b 2.5 or below more than 99 % of the time (Fig. 7.4.10). Further improvements would clearly be possible by adding more stations to the monitoring network, especially highly sensitive stations at other azimuths than those covered by the Fennoscandian network. This would in particular contribute to lowering the peaks due to interfering events, whereas any event truly originating in the target region would of course still stand out clearly on the combined network traces.

In conclusion, the continuous threshold monitoring has been demonstrated to provide a simple and very effective tool in day-to-day monitoring of a site of particular interest. Further research will focus upon developing methods to analyze time intervals during which significant evasion possibilities might exist. Data from the regional arrays, the large-aperture NORSAR arrray, as well as other available stations, will be used in these analyses.

- T. Kværna
- F. Ringdal

References

- Bache, T.C., S.R. Bratt, J. Wang, R.M. Fung, C. Kobryn and J. Given (1990): The Intelligent Monitoring System, *Bull. Seism. Soc. Am.*, Special Issue, in print.
- Ringdal, F. and T. Kværna (1989): A multichannel processing approach to real time network detection, phase association and threshold monitoring, Bull. Seism. Soc. Am., 79, 1927-1940.

Station	Phase	Tr. Time	App. Vel.	Azim.	Filter	Config.	STA_len.	Tim. Tol.	Sta_Calib
ARC	Pn	148.0	9.9	60.5	3.0-5.0	A0,B,C,D	2.0	2.0	0.754
ARC	Sn	257.0	4.9	53.2	3.0-5.0	A0,B,C,D	5.0	3.0	1.176
FIN	P	228.0	9.6	32.9	2.0 - 4.0	A0,B,C,	2.0	2.0	1.520
NRS	P	284.0	10.4	28.1	1.5 - 3.5	A0,B,C,D	2.0	2.0	0.677

Tr. time	_	Travel time of phase
App. vel.	_	Apparent velocity from broadband F-K measurement
Azim.		Azimuth from broadband F-K measurement
Filter		Cutoffs of bandpass filter (3rd order Butterworth)
Config.		Array configuration used in beamforming. A0,B,C means
		A0Z, B-ring and C-ring
STA Jen.		STA length in seconds
Tim. tol.		Time tolerance when searching for maximum STA
STA_calib.		Calibration factor used when converting STA values
		(in quantum units) to magnitude.
		$Magnitude = log10(STA) + STA_calib.$

Table 7.4.1.

	Day-of-Year							Total
	297	298	299	300	301	302	303	(one week)
$m_b \ge 4.0$	1	0	0	0	0	0	0	1
$m_b \geq 3.5$	1	1	0	0	0	0	0	2
$m_b \geq 3.0$	3	2	2	0	0	0	0	7
$m_b \geq 2.5$	5	12	5	0	3	6	3	34

Table 7.4.2. Statistics of peaks in the network threshold traces. See also comments on Figs. 7.4.3-7.4.9.

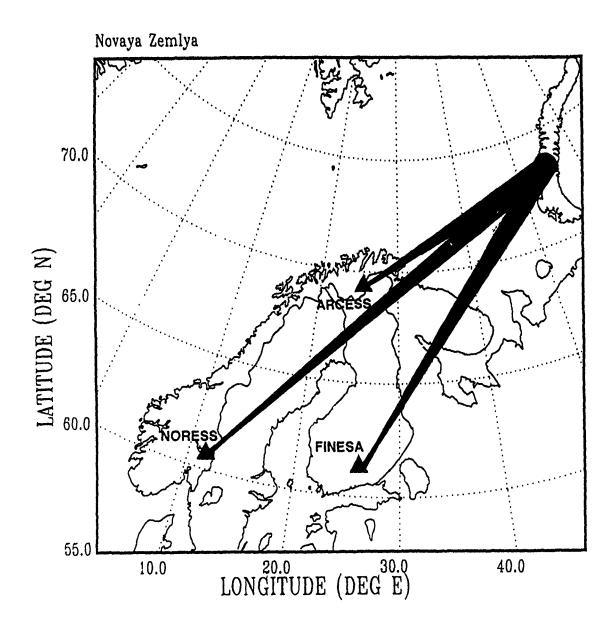


Fig. 7.4.1. Location of the target area (Novaya Zemlya) for the threshold monitoring experiment. The locations of the three arrays NORESS ($\Delta=2280$ km), ARCESS ($\Delta=1110$ km) and FINESA ($\Delta=1780$ km) are indicated.


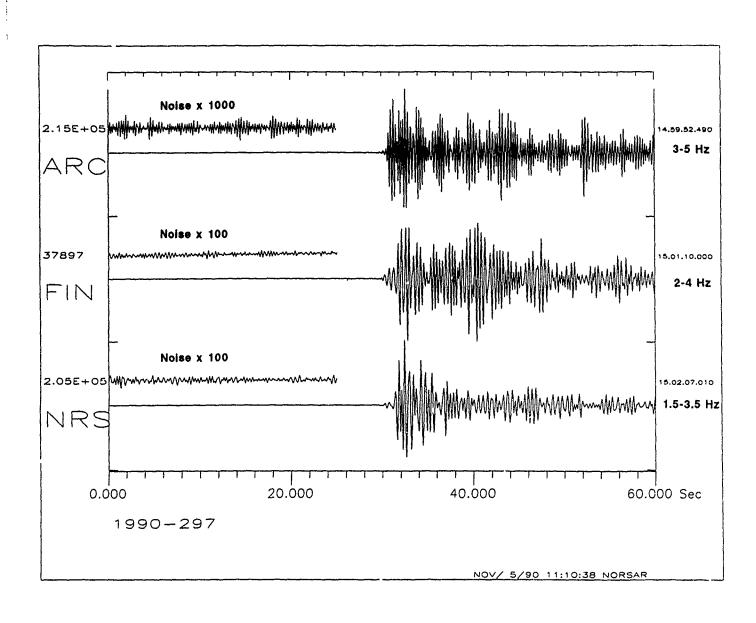


Fig. 7.4.2. P-wave recordings (filtered array beams) at ARCESS, FINESA and NORESS for the Novaya Zemlya nuclear explosion 24 October 1990. To illustrate the high signal-to-noise ratios, noise traces scaled by factors of 1000 (ARCESS) and 100 (FINESA and NORESS) are displayed for each array.

A CANA THE WASHINGTON TO SELECT A SECURITY OF THE SECURITY OF


中で ラダンは あるのでは できる

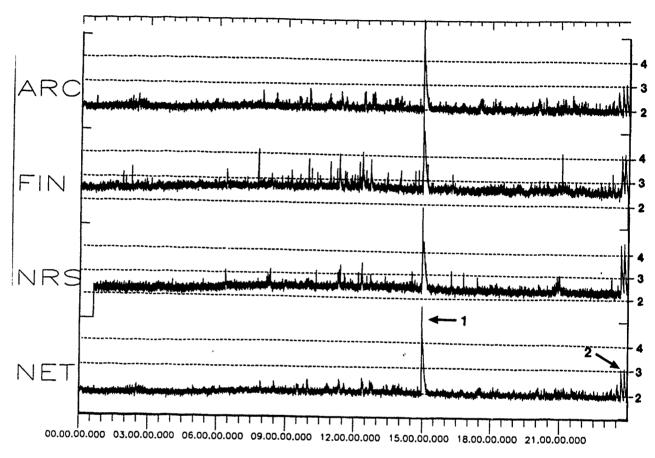

1990-297:00.00.00.000

Fig. 7.4.3. Threshold monitoring of the Novaya Zemlya test site for day 297 (24 October 1990). The top three traces represent thresholds (upper 90 per cent magnitude limits) obtained from each of the three arrays (ARCESS, FINESA, NORESS), whereas the bottom trace shows the combined network thresholds.

- 1. An underground nuclear explosion ($m_b = 5.7$) at Novaya Zemlya at 14.58.00 GMT. The peak of the network trace is 5.64.
- 2. Two teleseismic earthquakes from N. Xinjang province, China $(m_b = 5.2 \text{ and } 5.4)$. The P-wave train from each of these earthquakes causes the network threshold to increase to about $m_b = 3.0$ for the target region.

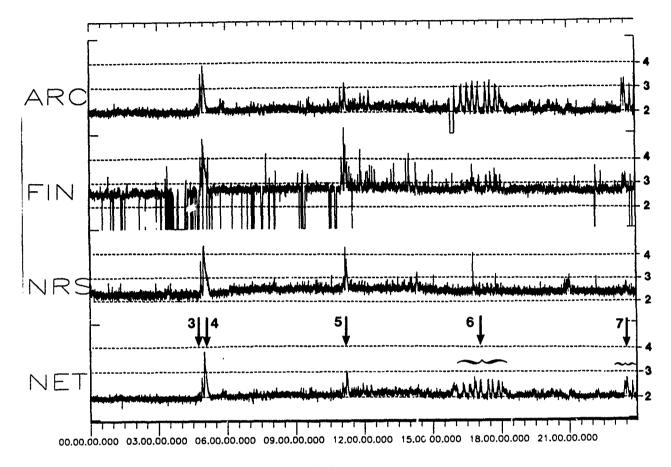

1990-298:00.00.00.000

Fig. 7.4.4. Same as Fig. 7.4.3, but for day 298 (25 October 1990). The FINESA array had several short outages this day, but this caused no particular problems in terms of network threshold capacity.

- 3. An earthquake $(m_b = 4.5)$ near Jan Mayen. The corresponding network threshold peak for Novaya Zemlya is $m_b=2.8$.
- 4. A teleseismic earthquake ($m_b = 6.0$) at Hindu Kush. The relatively strong P-wave train caused a peak threshold of $m_b = 3.8$ for monitoring Novaya Zemlya.
- 5. A teleseismic earthquake ($m_b = 5.9$) at Mindanao, Philippine Islands. Corresponding threshold is $m_b = 3.0$.
- 6-7. A sequence of seismic events (presumably underwater explosions) near Murmansk, Kola Peninsula. The network threshold for monitoring Novaya Zemlya is about $m_b = 2.5$ to 2.8 at the times of these events.


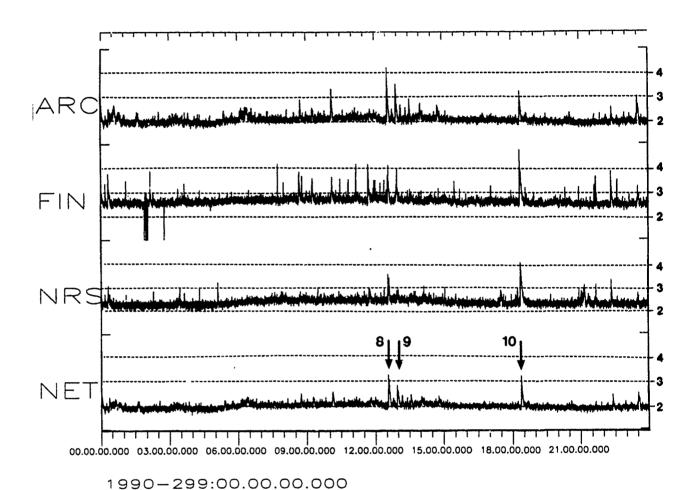


Fig. 7.4.5. Same as Fig. 7.4.3, but for day 299 (26 October 1990).

- 8. A large mining explosion $(M_L = 3.0)$ near the Norway-USSR border. The Novaya Zemlya threshold peak is $m_b = 3.2$. Note that this threshold exceeds the event magnitude; this is because of the proximity of the event to the network stations.
- 9. A large mining explosion ($M_L = 2.5$) at the Kola Peninsula. The Novaya Zemlya threshold peak is $m_b = 2.8$.
- 10. A teleseismic earthquake ($m_b = 5.1$) near Lake Baikal. The network threshold peak is $m_b = 3.2$.

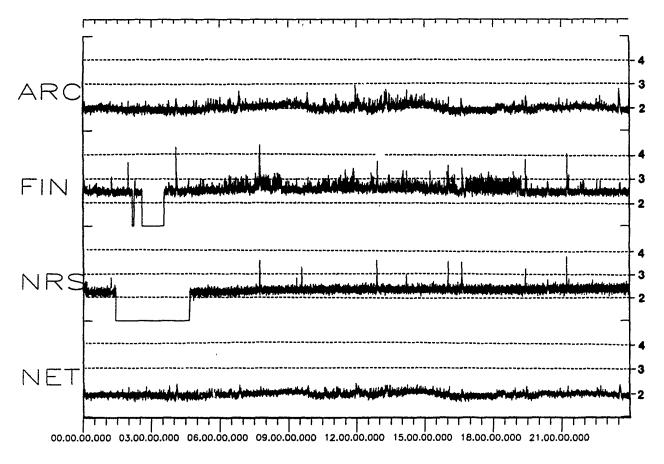


1990-300:00.00.00.000

Fig. 7.4.6. Same as Fig. 7.4.3, but for day 300 (27 October 1990).

Notes:

The state of the s

No significant peak during this day. The simultaneous outages at FINESA and NORESS did not cause significant problems for the network threshold monitoring.

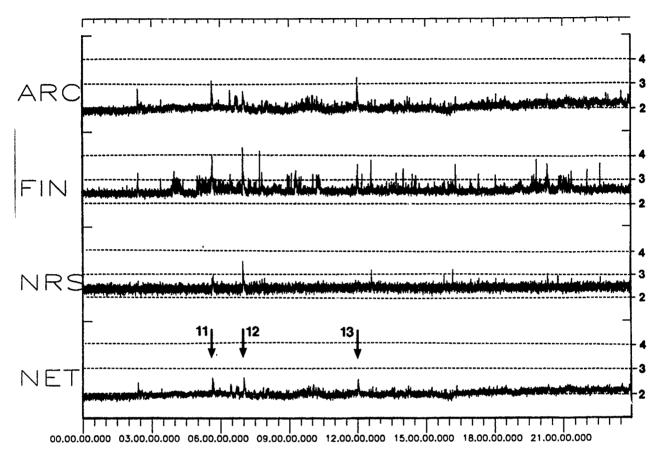

1990-301:00.00.00.000

Fig. 7.4.7. Same as Fig. 7.4.3, but for day 301 (28 October 1990).

- 11 and 13. Two large mining explosions $(M_L = 2.5)$ on the Kola Peninsula. Network threshold is about $m_b = 2.6$.
- 12. A teleseismic earthquake $(m_b = 5.3)$ at the Kurile Islands. Network threshold is $m_b = 2.7$.

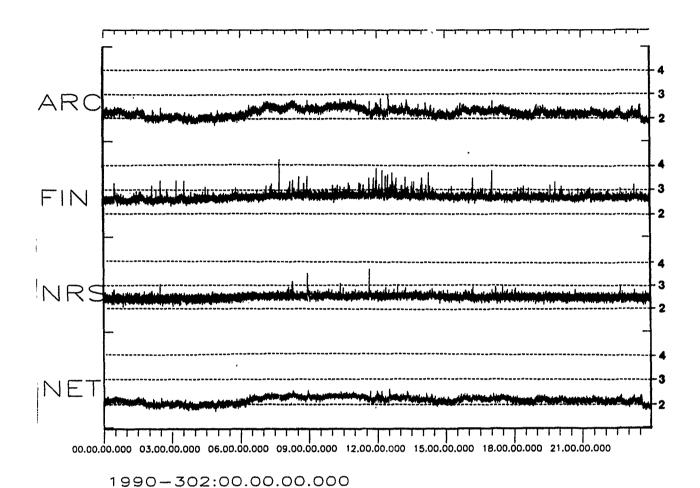



Fig. 7.4.8. Same as Fig. 7.4.3, but for day 302 (29 October 1990).

Notes:

一日本の大学の大学の大学を大きないのではないます。 まいかい

· The secretary of the second second

No significant peaks in the network threshold plot this day.

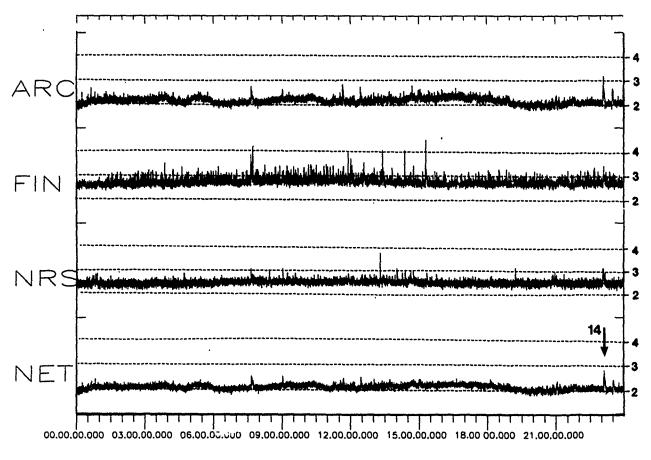

1990-303:00.00.00.000

Fig. 7.4.9. Same as Fig. 7.4.3, but for day 303 (30 October 1990).

Notes:

14. A small earthquake ($M_L = 2.8$) in Nordland, N. Norway, caused an increase in the network threshold for Novaya Zemlya to $m_b = 2.8$.

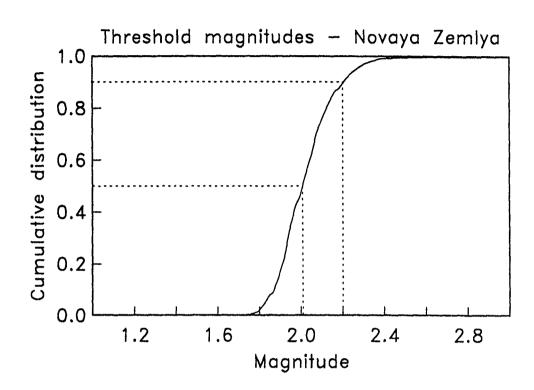


Fig. 7.4.10. Cumulative statistics of the network threshold magnitudes from Figs. 7.4.3-7.4.9, covering one full week of data.

7.5 Real-time processing using a hybrid 3-component / small array station

Introduction

In recent years, much effort has been devoted to developing and assessing various methods for 3-component seismic data processing. It has been demonstrated that polarization analysis can provide P azimuth estimates with good accuracy from a single 3-component station. Using SH or SV particle motion models, some success has also been reported in determining azimuth from S and Lg phases, although there is often a 90 or 180 degree ambiguity in the resulting estimates.

These efforts notwithstanding, a fundamental problem in automatic 3-component processing still remains. This is the problem of phase identification, which of course is essential in deciding which particle motion model to apply. From our experience at NORESS, a high degree of rectilinearity, which in theory would indicate the presence of a P phase, is quite often seen also for S and Lg phases, and even for noise bursts, when applying polarization analysis. As a result, an automatic P-type solution found by 3-component processing is often of limited usefulness, since it may either be a P phase (with correct azimuth) or some other phase (in which case the azimuth estimate is useless).

Small-aperture arrays of the NORESS-type have proved to be very effective in processing regional as well as teleseismic phases. Their primary features are:

- Significant SNR gains at high frequencies
- Reliable phase identification (P-type versus S-type phases)
- Precise azimuth estimates of all phase types.

While the accuracy of NORESS azimuth estimates can be as good as \pm 1 degrees for well-calibrated regions, the uncertainty of uncalibrated azimuth estimates is often of the order of 10 degrees or more, due to lateral inhomogeneities near the receivers. In practical schemes for automatic phase association (e.g., Mykkeltveit and Bungum, 1984), a tolerance of 30 degrees in azimuth deviation from the true value is often assumed. Given that the acceptable limits in azimuth estimation for phase association purposes are much less restrictive than the optimum array capability, a natural question is whether a smaller regional array can achieve reliable phase identification as well as an acceptable uncertainty in azimuth estimation.

We have attempted to address this question, and have chosen to evaluate the smallest such array available to us: the NORESS A-ring subarray (Fig. 7.5.1). This subarray comprises a center 3-component seismometer A0, surrounded by a triangular SPZ array A1-3. The diameter of this subarray is

only 0.3 kr, i.e., a factor of 10 less than NORESS, and it thus spans an area only 1 per cent of that of the full NORESS array. In this paper, we present an initial evaluation of automatic detection processing using this very small array.

Automatic processing

We conducted automatic detection processing of the A-ring subarray for a period of 5 days (22-26 October 1990), using a standard multi-filter power detector with parameters as specified in Table 7.5.1. For each detected signal, broadband F-K analysis was conducted using the 4 SPZ sensors, and compared to the NORESS F-K results. We also carried out polarization analysis (using a P-wave particle motion model) for each detected phase, applying the method of Kværna and Doornbos (1986) to the 3-component A0 system.

To obtain a data base for the evaluation, we extracted all seismic phases detected by NORESS and associated to verified regional events for the 5-day period. The generalized beamforming procedure (Ringdal and Kværna, 1989) and the results from IMS processing (Bache et al, 1990) were used in order to ensure correct location of these reference events. P-coda detections and multiple S-phases were ignored, so that each event provided a maximum of 3 phases (P, S and Lg). These phases were then matched to the detection lists produced from the A-ring SPZ subarray and the 3-component analysis, and the phase velocity and azimuth estimates were compared.

Phase identification

Fig. 7.5.2 shows the A-ring phase velocity F-K estimates for P phases (circles) and S phases (crosses) for the reference data set. The separation is better than 95 per cent, which implies that even this small array is able to provide correct phase identification automatically and with high confidence. The corresponding picture for the full NORESS array is shown in Fig. 7.5.3, and naturally shows a better separation. It should be noted here that all the reference phases were by definition correctly identified by NORESS, so it is not surprising that the separation is 100 per cent. But it is still interesting to compare the scatter in the two data sets.

P-wave azimuths

Fig. 7.5.4 compares P-wave azimuths estimated by the full NORESS SPZ array and the small A-ring SPZ subarray using broadband F-K analysis in both cases. The estimates are very consistent, and the large majority are well within a tolerance limit of 30 degrees.

A corresponding plot for P waves analyzed from 3-component records is given in Fig. 7.5.5, and shows a similar amount of scatter. In fact, the scatter is slightly less than in Fig. 7.5.4. Thus, the polarization analysis can give very useful contributions to regional azimuth estimates, assuming that the

phase first has been identified as a P phase. An interesting approach would be to combine the two azimuth estimates (A-ring SPZ and 3-comp) in order to obtain increased stability.

S-wave azimuths

Fig. 7.5.6 compares azimuths of S-type phases estimated by the A-ring SPZ subarray and the full NORESS array. Again, the correspondence is quite good, and thus shows that automatic regional phase association using RONAPP-type processing can be achieved even when using an array as small as 0.3 km in diameter. We note that our 3-component processing provides no useful azimuth information for S phases, but it is of course possible that such information could be obtained in certain cases, given that the phase first has been identified as S or Lg.

Detectability

Figs. 7.5.7 and 7.5.3 illustrate the P and S wave detectability of the Aring array as a function of NORESS SNR. From Fig. 7.5.7, it is seen that all P phases with SNR > 20 dB (i.e., STA/LTA > 10 at NORESS) have been detected. At distances below 500 km, several events of relatively low SNR at NORESS have also A-ring detections; this is due to the high signal frequencies which cause the full array SNR gains of these phases to be less than the theoretical \sqrt{N} . At distances above 500 km, the superiority of the full NORESS array becomes apparent.

In Fig. 7.5.8 it is seen that the A-ring subarray is close to matching NORESS S-phase detectability at all distances. This is because the horizontal components of the A0 3-component system provide quite efficient detection of S and Lg phases, in particular when added incoherently to the vertical component. The full array does not have the same SNR gain for secondary phases as for P-phases, because of less signal coherency and (in particular) coherent noise caused by P coda. Thus, as expected, there is not a significant difference in secondary phase detection.

False alarm consideration

In practical operation of any seismic system, the problem of false detections is very important. This is especially the case if the online detector is operated at a low detection threshold, and it is essential to be able to identify false alarms at as early a stage as possible.

To address this problem, we have analyzed in detail all the A-ring detections for one full data day (24 October 1990). The results are presented in Table 7.5.2, again with NORESS results as a reference. From the table, it is seen that out of 117 total phase detections, 105, or 90 per cent, were correctly classified using the broadband F-K analysis applied to A-ring SPZ data. Of these 105 phases, 37 were P, 36 S (or Lg) and 32 noise (i.e., low-velocity de-

tections). Note that P coda detections were counted as P and S and a were counted as S in these statistics. None of the 37 phases which (according to NORESS) were of the P type were misclassified by the A-ring. Of the 40 S phases, 4 were misclassified (2 P and 2 noise). Out of 40 noise detections, 3 were given P-phase velocities and 5 were given S-phase velocities when using the A-ring.

These statistics must be considered quite satisfactory. In fact, it appears that the SNR threshold for the A-ring detector could be lowered significantly, and still produce a reasonable false alarm rate.

Conclusions

The problems encountered when using a 3-component system in a realtime automatic processing environment appear to be effectively alleviated by supplementing the 3-C system with a very small (aperture 0.3 km) 3-element array. Based on the studies in this paper of the NORESS A-ring subarray, we conclude that:

- Phase identification (P or S) can be reliably achieved (better than 95 % success rate) using F-K analysis of the A-ring array data.
- Azimuth estimates, with accuracy generally to within 30 degrees can be obtained for both P and S phases using A-ring array processing, and (at least) for P-phases using 3-component polarization analysis of the A0 3-component station..
- Good regional P-phase detectability can be obtained from the A-ring array out to 500 km epicentral distance. At greater distances, P-wave detectability relative to that of NORESS deteriorates sharply.
- Detectability of S-phases using the A-ring array is excellent at all distances, and comes close to matching that of the full NORESS array.
- The A-ring array analysis makes it possible to isolate the majority of noise detections, thus giving an acceptable false alarm rate for online operation.

It would be an interesting experiment to supplement some existing 3-component stations with a triangular small array as described here, and conduct network detection and location experiments. Before doing so, it is of course important to verify that these results can be obtained in other geological and geographical environments, e.g., by analyzing similar data for other existing arrays (ARCESS, GERESS, FINESA).

A very smail array of the A-ring type is especially suited for processing high signal frequencies. In fact, one might consider a dense sensor deployment within the A-ring aperture, as an experiment aimed at conducting array processing at frequencies of 20-40 Hz. This would of course require a higher sampling rate than the 40 Hz currently used at NORESS. Array processing at these frequencies would be of particular interest in the context of developing methods for monitoring cavity decoupled explosions, which might have significant signal energy in this frequency band.

T. Kværna

F. Ringdal

References

- Bache, T.C., S.R. Bratt, J. Wang, R.M. Fung, C. Kobryn and J. Given (1990): The Intelligent Monitoring System, *Bull. Seism. Soc. Am.*, Special Issue, in print.
- Kværna, T. and D.J. Doornbos (1986): An integrated approach to slowness analysis with arrays and three-component stations, NORSAR Semiannual Technical Summary, 1 Oct 1985 31 Mar 1986, NORSAR Sci. Rep. No. 2-85/86, Kjeller, Norway.
- Mykkeltveit, S. and H. Bungum (1984): Processing of regional seismic events using data from small aperture arrays, *Bull. Seism. Soc. Am.*, 74, 2313–2333.
- Ringdal, F. and T. Kværna (1989): A multichannel processing approach to real time network detection, phase association and threshold monitoring, Bull. Seism. Soc. Am., 79, 1927-1940.

Coherent beams:

Beam	Apparent vel.	Azimut	Filter band	Configuration	Threshold
NZ01	9999.9	0.0	0.5- 1.5	A0z,A1z,A2z,A3z	4.0
NZ02	9999.9	0.0	1.0- 2.0	A0z,A1z,A2z,A3z	3.7
NZ03	9999.9	0.0	1.0- 3.0	A0z, A1z, A2z, A3z	3.7
NZ04	9999.9	0.0	1.5- 2.5	A0z, A1z, A2z, A3z	3.5
NZ05	9999.9	0.0	1.5- 3.5	A0z, A1z, A2z, A3z	3.5
NZ06	9999.9	0.0	2.0- 3.0	A0z, A1z, A2z, A3z	3.5
NZ07	9999.9	0.0	2.0- 4.0	A0z, A1z, A2z, A3z	3.5
NZ08	9999.9	0.0	2.5- 4.5	A0z, A1z, A2z, A3z	3.5
NZO9	9999.9	0.0	3.0- 5.0	A0z, A1z, A2z, A3z	3.5
NZ10	9999.9	0.0	3.5- 5.5	AOz, Alz, A2z, A3z	3.7
NZ11	9999.9	0.0	4.0- 8.0	A0z, A1z, A2z, A3z	3.7
NZ12	9999.9	0.0	5.0-10.0	A0z, A1z, A2z, A3z	3.7
NZ13	9999.9	0.0	8.0-16.0	A0z,A1z,A2z,A3z	4.0

Incoherent beams:

Beam	Apparent vel.	Azimut	Filter band	Configuration	mbb3-3
				Configuration	Threshold
NA01	9999.9	0.0	0.5~ 1.5	AOz,AOn,AOe	2.7
NA02	9999.9	0.0	1.0- 2.0	A0z, A0n, A0e	2.6
NA03	9999.9	0.0	1.0- 3.0	A0z, A0n, A0e	2.5
NA04	9999.9	0.0	1.5- 2.5	A0z,A0n,A0e	2.5
NA05	9999.9	0.0	1.5- 3.5	A0z,A0n,A0e	2.5
NA06	9999.9	0.0	2.0- 3.0	A0z, A0n, A0e	2.6
NA07	9999.9	0.0	2.0- 4.0	A0z, A0n, A0e	2.8
NA08	9999.9	0.0	2.5~ 4.5	A0z,A0n,A0e	3.4
NA09	9999.9	0.0	3.0~ 5.0	A0z,A0n,A0e	3.5
NA10	9999.9	0.0	3.5~ 5.5	A0z, A0n, A0e	2.8
NAl1	9999.9	0.0	4.0~ 8.0	A0z,A0n,A0e	2.5
NA12	9999.9	0.0	5.0-10.0	A0z,A0n,A0e	2.5
NA13	9999.9	0.0	8.0-16.0	A0z, A0n, A0e	2.8

Table 7.5.1. Parameters used for the A-ring detector experiment.

	Classified as:						
Correct	P	S or Lg	Noise				
Phase id	(v>6 km/s)	$(3.4 < v \le 6 \text{ km/s})$	$(v \le 3.4 \text{ km/s})$				
P	37	0	0				
S or Lg	2	36	2				
Noise	3	5	32				

Total phases detected by the A-ring detector: 117 Total phases correctly classified: 105 (90 %)

Table 7.5.2. Statistics of detected phases for the A-ring array for a 24-hour period. The phases are classified based on estimated phase velocities using A-ring SPZ broadband F-K, and the "correct" phase id is based on F-K results from the full NORESS array.

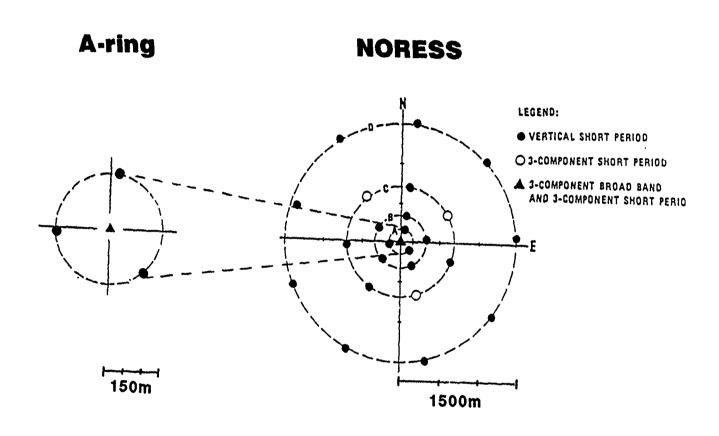


Fig. 7.5.1. Geometry of the full NORESS array and of the A-ring subarray used in this study.

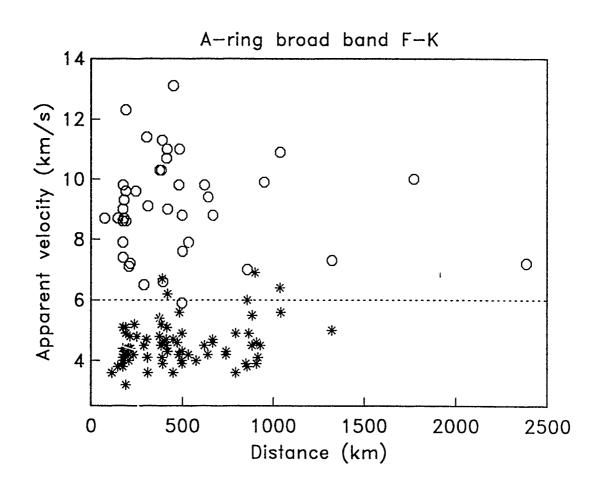


Fig. 7.5.2. Estimated phase velocities using the A-ring SPZ array (broadband F-K) for detected P phases (circles) and S phases (asterisks). Note that the phases can be identified from phase velocity with more than 95 % accuracy.

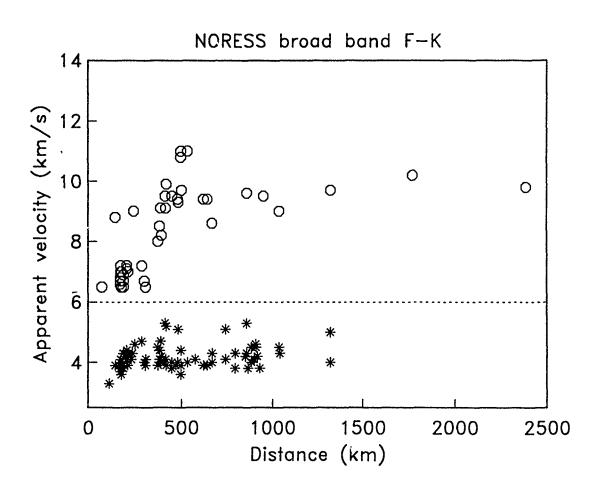


Fig. 7.5.3. Similar to Fig. 7.5.2, but with phase velocities estimated using the full NORESS array.

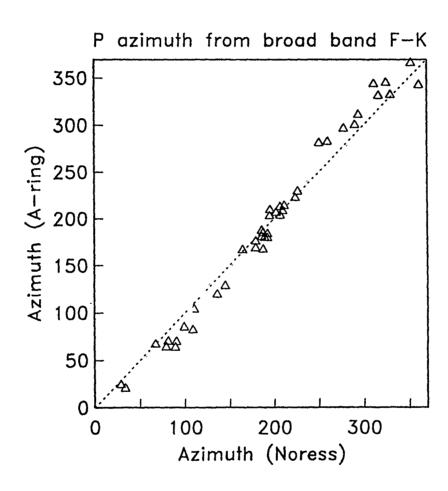


Fig. 7.5.4. Comparison of estimated azimuths of P phases using the full NORESS array and the A-ring SPZ array (broadband F-K). Note the excellent consistency.

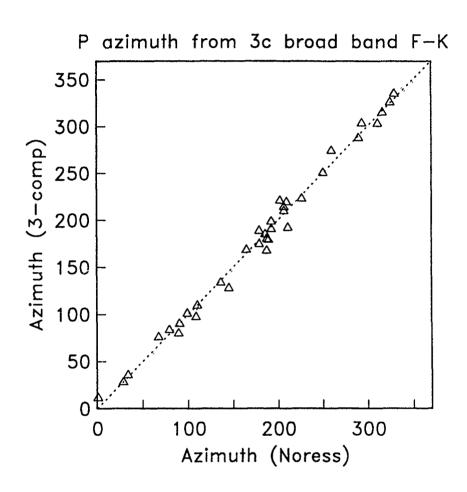


Fig. 7.5.5. Comparison of estimated azimuths of P phases using the full NORESS array (broadband F-K) and the A0 3-component system (polarization analysis). Note that the consistency is similar to that of Fig. 7.5.4.

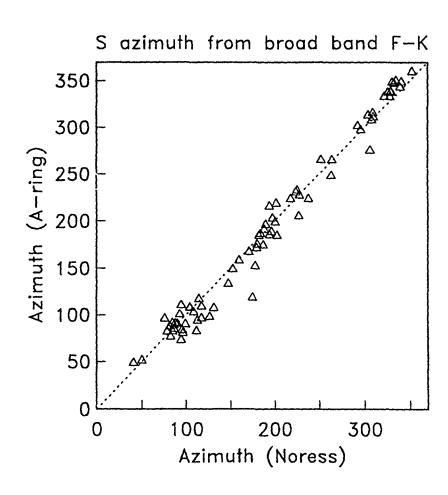


Fig. 7.5.6. NORESS and A-ring azimuth comparison for S phases. Note that the consistency is as good as for P phases (in Fig. 7.5.4).

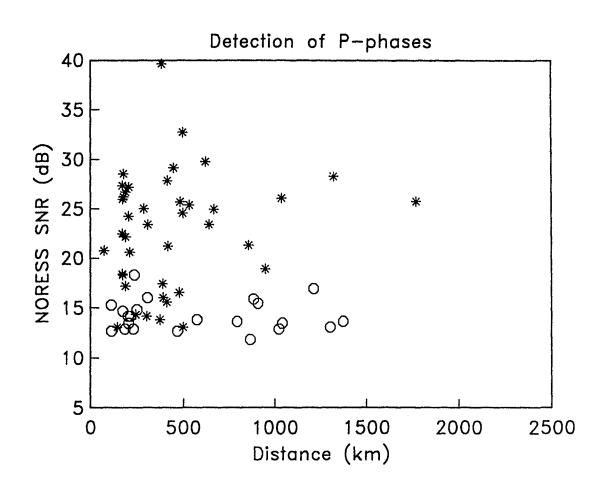


Fig. 7.5.7. Illustration of P-phase detectability of the A-ring SPZ array combined with the 3-component A0 system. P-phases detected by the A-ring SPZ/3-component system are marked as asterisks, whereas nondetected phases are marked as circles. Note that the reference array (NORESS) is clearly superior at distances > 500 km.

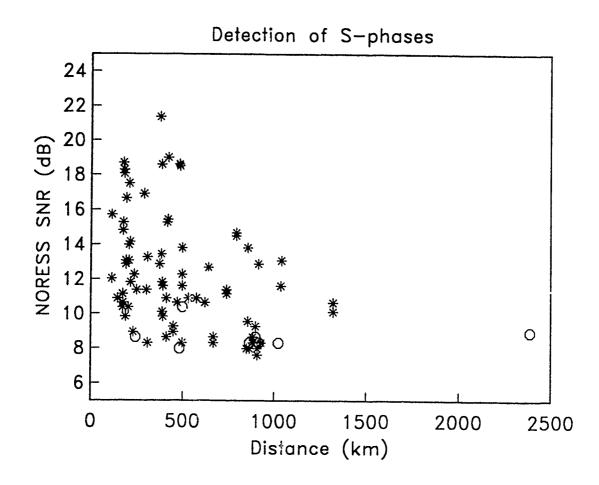


Fig. 7.5.8. Same as Fig. 7.5.7, but for S phases. Note that in this case the small array/3-component system comes close to matching the full array performance.

7.6 Development of two three-component stations in Poland

Background

A network of four regional arrays currently contributes data to the NOR-SAR Data Processing Center in Norway. These arrays are the NORESS and ARCESS arrays in Norway, the FINESA array in Finland and the GERESS array in the Federal Republic of Germany (see Fig. 7.6.1). Data from ARCESS and NORESS are processed jointly in the Intelligent Monitoring System (IMS) that has been installed at NORSAR this year. A forthcoming upgrade of IMS will allow joint processing of data from N arrays and M single stations.

As a cooperative effort between Poland and the United States, two modern seismic stations, including workstations for on-site data recording and analysis, are now being installed in Poland. Each installation comprises a three-component broad band station and a three-component short period station. These stations represent a valuable extension of the existing network of regional arrays in northeastern Europe. In order for IMS, however, to take full advantage of these new stations, the data from Poland must be transmitted continuously and in real time to Norway. This contribution gives descriptions of the field systems installed in Poland, the communications arrangements between Poland and Norway, and the system configured at NORSAR for the purpose of acquiring the data from the two stations in Poland.

Installations in Poland

The two stations in Poland are located at Ksiaz, in the vicinity of the town of Walbrzych in southwestern Poland, and at Stary Folwark, near the town of Augustow in northeastern Poland (see Fig. 7.6.1).

Teledyne Geotech installed in June this year a seismic system at Ksiaz, comprising a short period three-component station (GS-13 sensors), a broad band three-component station (BB-13 sensors), an RDAS-200 data acquisition unit, and a SUN-2 based NOMAD workstation for local data analysis and archiving. Ksiaz is an existing seismological observatory affiliated with the Department of Seismology of the Institute of Geophysics (in Warsaw) of the Polish Academy of Sciences. The local staff at the observatory at Ksiaz will operate the new station and use the workstation in their daily data analysis.

The new station in Stary Folwark will be installed by Teledyne in November. It will be identical to the station at Ksiaz, except there will be no workstation, since there will be no local seismological staff.

Communications links

Reliable communications links between the NORSAR Data Processing Center in Norway and the two sites in Poland can only be accomplished via satellite. Discussions were conducted with the telecommunication authorities in both Poland and Norway in order to determine how such links could be established, and the Polish PTT responded that they would allow the Norwegian Telecommunication Administration (NTA) to deliver and put into operation the ground station equipment needed in Poland.

NTA decided to use the EUTELSAT SMS system for the satellite links between Poland and Norway, and communications were installed in October/November as depicted in Fig. 7.6.2. The data transmission links each have a capacity of 64 kbits/s. The link between Stary Folwark and NORSAR is simplex, while the Ksiaz-NORSAR link is full duplex. The backlink from NORSAR to Ksiaz provides the staff at the Ksiaz observatory with access to data bases at NORSAR, including Stary Folwark data. The Ksiaz to NORSAR link uses a set of multiplexers to enable division of the capacity into several channels, as shown in Fig. 7.6.2. The seismic data from Ksiaz use a 19.2 kbits/s channel, the other 19.2 kbits/s channel will be running the SLIP protocol and used for general purposes, one of the 9.6 kbits/s channels will be used tor general terminal access, and two remaining channels (9.6 and 2.4 kbits/s, not shown in Fig. 7.6.2) are spare ones.

Data acquisition and analysis at NORSAR

A data acquisition system to handle the data from the two stations in Poland has been configured at NORSAR, that is essentially identical to the data acquisition systems currently handling the data streams from the regional arrays. As seen in Fig. 7.6.2, the communications interface is NORSAR's BUSC system (see Paulsen et al, 1989). Otherwise, the data acquisition system comprises a SUN 3/260 computer with a Floating Point Accelerator, a 1.2 Gb disk drive with controller, an Exabyte tape drive with SCSI controller, and Ethernet. This system will make it possible to present the data from Poland to the IMS in the same way data from the arrays are made available.

The 24 October 1990 nuclear test at Novaya Zemiya was recorded by the new seismic station at Ksiaz, and the recordings for both the short period and the broad band stations are shown in Fig. 7.6.3.

S. Mykkeltveit

R. Paulsen

hejerences

Paulsen, R., J. Fyen, P.W. Larsen and S. Mykkeltveit (1989): A new data acquisition system for FINESA. In: Semiannual Technical Summary, 1 April - 30 September 1989, NORSAR Sci. Rep. No. 1-89/90, Kjeller, Norway.


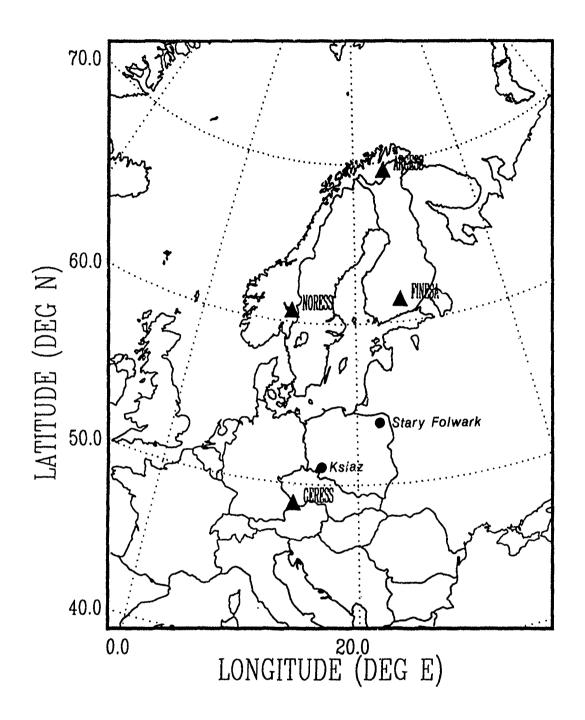


Fig. 7.6.1. The map shows the location of the regional arrays NORESS, ARCESS, FINESA and GERESS, as well as the two new stations in Poland.

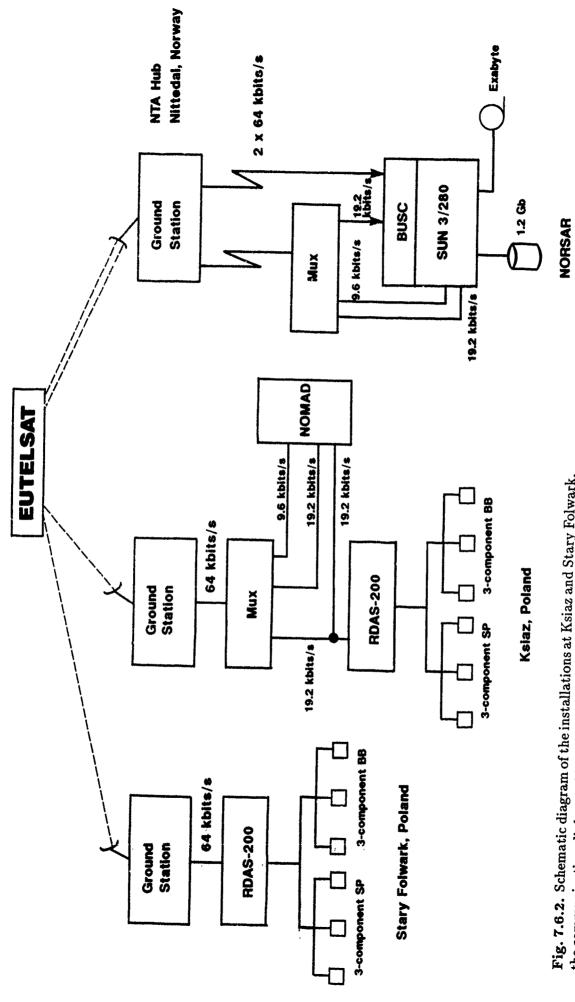


養養をかけるましょうとうないことと

ハイス

Fig. 7.6.2. Schematic diagram of the installations at Ksiaz and Stary Folwark, the communications links established between these stations and the NORSAR Data Processing Center in Norway, and the NORSAR data acquisition system for the two data streams from Poland.

であるとは、

Kjeller, Norway

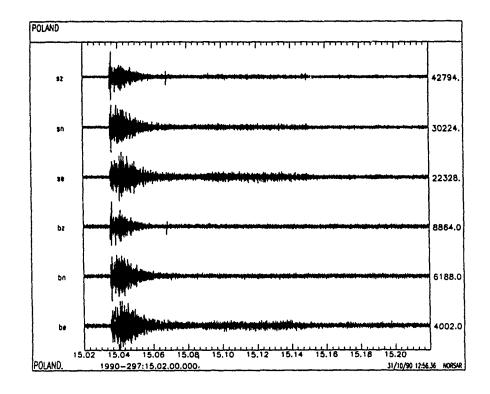

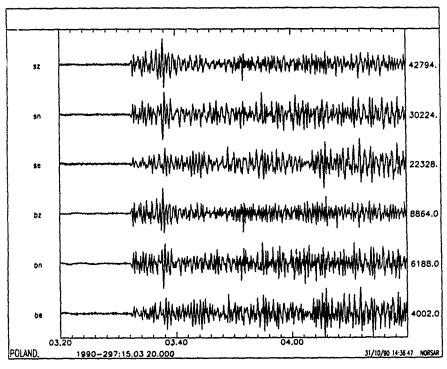


Fig. 7.6.3. Short period (sz, sn, se) and broad band (bz, bn, be) 3-component recording at Ksiaz of the 24 October 1990 nuclear explosion at Novaya Zemlya. The upper frame shows 20 minutes of data, whereas the lower frame covers a one-minute interval around the P onset.

7.7 Optimal group filtering and noise attenuation for the NORESS and ARCESS arrays

A generalization of Capon's (1970) maximum likelihood technique for detection and estimation of seismic signals has recently been introduced by Kushnir et al (1990). By using a multidimensional autoregressive approximation of seismic array noise, a technique to use Capon's multichannel filter for online processing has been developed. Such autoregressive adaptation to the current noise matrix power spectrum has been shown to yield good suppression of coherent noise processes. This paper presents further results of our studies of of adaptive optimal group filtering (AOGF) which now has been applied to more than 80 earthquake and underground nuclear explosion recordings at the small aperture arrays NORESS and ARCESS in Norway (Fig. 7.7.1).

Compared to conventional beamforming, AOGF is demonstrated to provide high signal-to-noise ratio (SNR) gains (12-18 dB) over a wide frequency band (0.2-5.0 Hz), while retaining an undistorted signal waveform. This gain is mainly due to suppression of noise at low frequencies, where both noise power and noise coherency is greatest.

AOGF has also been tested in combination with statistically optimal algorithms for detection and onset time estimation using the maximum likelihood principle. Here, narrow-band filtering has been applied, selecting the frequency band most appropriate for detecting weak arrivals by conventional beamforming. Even in this case, AOGF provides significant gain in SNR (typically 6-8 dB in the 2-4 Hz band) compared to the array beam.

Description of software used

THE PROPERTY OF THE PROPERTY O

15

The conventional technique for array signal processing is based on beamforming, band pass filtering and STA/LTA detection. Beamforming is the statistically optimal procedure under the assumption of independent noise among the M different receivers of the array and in this case it improves power signal-to-noise ratio by a factor of M. For correlated noise this procedure is not optimal in the statistical sense. Bandpass filtering gives additional improvement of SNR, but this procedure, evidently, may reduce available information about the signals. The STA/LTA detector is a simple procedure, but it is sensitive only to variations of recorded power due to signal arrival, and it does not make use of spectral differences between signal and noise. So there is room left for improvement of this technique, and a possibility is to use statistically optimal procedures accounting for noise and signal features.

Now, at NORSAR a technique based on statistically optimal procedures has been tested. This technique is illustrated in Fig. 7.7.2 and consists of adapative optimal group filtering (AOGF) followed by optimal detection (OD) and optimal signal onset time estimation (OE) (see Pisarenko et al, 1987).

AOGF is based on a Wiener optimal filter with frequency response

$$\vec{H}(\lambda) = \vec{G}^*(\lambda)F^{-1}(\lambda)/\vec{G}^*(\lambda)F^{-1}(\lambda)\vec{G}(\lambda)$$

using the multichannel array record $\vec{X}_t = \vec{S}_t + \vec{\xi}_t$, $\vec{S}_t = \vec{G}_t^* u_t$ for input. The output of this filter Y_t is a scalar. AOGF reduces the noise power to a minimum, using the estimated inverse matrix power spectrum $F^{-1}(\lambda)$ of the array noise $\vec{\xi}_t$. The vector function $\vec{G}(\lambda)$ represents the medium frequency response along the paths from the seismic source to the array sensors, u_t is the scalar signal of the seismic source (waveform). For a homogeneous medium, \vec{G}_t is determined by signal arrival delays at different stations. If AOGF is tuned properly $(\vec{G} = \vec{G})$ and $\vec{\xi} = 0$, then the AOGF output Y_t coincides with the signal waveform u_t . The procedure thus avoids introducing any distortion of the signal. If the noise is uncorrelated $(F(\lambda) = I)$ (I - identity matrix) and $\vec{G}(\lambda)$ depends on delays only, then AOGF coincides with beamforming.

The inverse power spectrum matrix $F^{-1}(f)$ is estimated from pure noise preceding the signal by a procedure of adaptation using multichannel autoregressive (AR) modelling. AR estimation of this large size matrix function considerably reduces computations and has experimentally proved to be an excellent procedure for estimating the coherent noise matrix power spectrum.

The optimal detector (OD) (Fig. 7.7.2) is based on autoregressive modelling and moving window detection. In a series of experiments OD proved to exceed STA/LTA results due to optimal accounting of spectral variations in the moving window. The optimal estimator (OE) (Fig. 7.7.2) is a maximum likelihood procedure applied to the time interval around the detection time. It is likewise based on an autoregressive modelling procedure and is sensitive to small variations of spectra in a chosen time interval.

Coherency of noise and optimal group filtering

In Kushnir and Lapshin (1984) it is shown that the SNR at the output of OGF tends to infinity with increasing noise coherency. Coherent noise may be represented as a superposition of noise contributions from several spatially distributed sources. ARCESS and NORESS noise seems to have a strong coherent component, which made it possible to achieve power SNR gain factors of AOGF relative to beamforming of about 70-80 at ARCESS and 20-30 at NORESS (Kushnir et al, 1990; Kushnir et al; 1989). Coherent noise may be recognized from spatial spectral FK-analysis, where noise and signals coming from different sources correspond to different peaks in the slowness vector plane. Strong coherent noise may be represented in the frequency domain as

$$\vec{\xi}(\lambda) = \sum_{k=1}^{N} \xi_k(\lambda) \vec{\phi}_k + \epsilon \vec{\eta}(\lambda), \quad \lambda \in (0, 2\pi]$$

where $\xi_k(\lambda)$ are scalar noise source signals, $\vec{\phi}(\lambda)$ is the vector frequency response from the k-th noise source to the array receivers, and $\vec{\eta}(\lambda)$, k = 1, ..., N

are independent power spectrum matrices.

$$F(\lambda) = \sum_{k=1}^{N} f_k(\lambda) \vec{\phi}_k(\lambda) \vec{\phi}_k^*(\lambda) + \epsilon^2 \Phi(\lambda)$$
 (1)

where $f_k(\lambda)$ is the spectral density of $\xi_k(\lambda)$ and $\Phi(\lambda)$ is the matrix power spectrum of diffuse noise, and $\vec{\phi}_k^*$ is the transposed conjugated vector. It can be seen that if $\epsilon \to 0$, the matrix $F(\lambda)$ projects each vector signal $\vec{Q}(\lambda)$ recorded by the array to the "noise" subspace, i.e., linear subspace

$$\left\{\vec{\phi}_k(\lambda), \ k=1,\ldots,N\right\}$$
:

$$f(\lambda)\vec{Q}(\lambda) \xrightarrow{\epsilon \to 0} \sum_{k=1}^{N} C_k \vec{\phi}_k(\lambda)$$

and $F^{-1}(\lambda)$ projects $\vec{Q}(\lambda)$ to the orthogonal subspace $\{\phi_k(\lambda)\}_{k=1,\dots,N}^{\perp}$. Hence, the power of each signal, coming from the "noise" subspace, will be greatly reduced by OGF. We would like to note that compensation of noise by OGF does not require stationarity of the noise source signals $\xi_k(\lambda)$, but stationarity of $\vec{\phi}(\lambda)$ is important.

Description of experiments

Checking of noise attenuation stability. This paper is the second report concerning our attempts to use AOGF at NORSAR. In the first one (Kushnir et al, 1989), we described theoretical capabilities of AOGF and its successful application for broad band extraction of one of the smallest nuclear explosion signals recorded at ARCESS. But in the case described in Kushnir et al (1989), adaptation was done just before the onset time. Therefore some doubts remained as to whether AOGF would work continuously without losing its good features during long periods of filtering time. To check the AOGF performance stability, we applied AOGF to some long-term records of pure ARCESS and NORESS noise.

In Fig. 7.7.3 we show the results of filtering by AOGF the 25 channels of a 40- minute long NORESS noise record. Only the first 2 minutes of the time interval were used for adaptation. AOGF output noise power is gradually increasing, but SNR power gain relative to the beam does not become less than 20. It means that if a signal arrives during this time interval, its SNR will be enhanced by AOGF at least 20 times better than by the beam. Looking at Fig. 7.7.3, one may predict that OGF can work much better than the beam during one hour or even more.

We applied AOGF to 5 ARCESS and 5 NORESS records each consisting of 25 minutes of pure noise, computing the SNR power for each 5 minutes. The results are presented in Fig. 7.7.4. From Fig. 7.7.4b we see that the gain of AOGF relative to beamforming for NORESS is between 15 and 25, for

ARCESS from 30 to 75. Again, adaptation is done during the first 2 minutes, and that is why we have the largest gain for the first 5 minutes, including the interval of adaptation. AOGF includes two stages: adaptation and filtering. The first is time consuming, the second is not. If readaptation is only needed once an hour or so, one may attempt to use several AOGFs, tuned to different azimuths and apparent velocities in the same manner as done by beamforming at NORSAR, and this may be more effective for noise suppression in online processing. An illustration of such an application of AOGF is shown in Fig. 7.7.5, where the gain of AOGF is presented versus azimuth. The velocity is constant and equal to 13 km/sec. The peak of the gain corresponds to the southern direction.

Extraction of missed phases. The capability of AOGF to work for a long ti. .e without readaptation also makes it possible, using pure noise before P arrivals for adaptation, to enhance the SNR of seismic phases located in time far from the P arrival. Two examples, described below, illustrate the application of all three optimal algorithms: adaptive optimal group filtering, optimal detection, and onset time estimation for extraction of missed seismic phases. It sometimes happens that regional phases like Pn or Lg are missed by the detector applied at NORSAR in the regular processing of NORESS and ARCESS data. We tried to use AOGF, OD and OE to remedy this situation for some of these cases, and they seemed to work well. Two cases were considered.

- a) For case 1 (Fig. 7.7.6a), the Lg phase was detected on NORESS, but the Pn and Sn phases were missed. Fig. 7.7.6b shows data for the same event, as recorded on the FINESA array in Finland. In Fig. 7.7.6c the result of AOGF, OD and OE and beamforming are shown for a window containing the presumed Pn onset. The onset time of the Pn wave is clearly seen, and the maximum of the OE curve is close to the theoretical Pn arrival. (The theoretical Pn arrival time is computed from the event location derived from the FINESA array data.) The theoretical and experimental P arrivals are shown on Fig. 7.7.6a. The first detection shown in Fig. 7.7.6d is questionable (is it caused by the Sn phase from the event considered or not) because the theoretical Sn arrival time differs from the experimental one. The second detection in Fig. 7.7.6d is more likely related to the Sn phase from the event considered.
- b) For case 2 (Fig. 7.7.7a) the regular NORESS processing detected the Pn and Sn phases, but no Lg was detected. This interpretation is confirmed by inspecting the ARCESS records. We have done an adaptation for AOGF just before the Pn arrival. The results are shown in Fig. 7.7.7b, where all three phases Pn, Sn and Lg are evidently detected. Their arrival times are shown on Fig. 7.7.7a as well.

These results suggest possible applications of AOGF in combination with

OD and OE for improvement of the detection lists generated by NORSAR's regular processing of array data.

Adaptive group filtering of seismic signals

AOGF was applied to the processing of 35 teleseismic earthquakes and 44 nuclear explosion signals recorded at NORESS. Earthquake locations are shown in Fig. 7.7.8. Most of the explosions are located at the Shagan River site. This selection of events was made with a view to future work on the discrimination problem. In all the cases, the SNR was much improved by AOGF, but the events may be divided into two classes. One class is where SNR was small in the first place and the other where it was large. In the first class (example in Fig. 7.7.9) improvement of SNR by AOGF is evident, and in the other example (Fig. 7.7.10a) the improvement is not evident in a broad frequency band (0.2-5.0 Hz). But if we consider only the low frequency band (for example, 0.2-0.5 Hz) the advantage of the group filter is seen clearly (Fig. 7.7.10b). This is due to two factors: The first is that at this latter frequency band the SNR is worse for the short-period records used, and the second is that the gain of AOGF seems to be largest due to the high noise coherency in this band.


Conclusion

By application of advanced techniques (apative optimal group filtering, optimal detector, optimal estimator), based on statistical algorithms, processing of NORESS and ARCESS array data may be improved. This improvement could be achieved by taking optimal advantage of array noise coherency and signal frequency contents. Compared to conventional beamforming, AOGF is demonstrated at NORESS and ARCESS to provide SNR gains from 12 to 18 dB over a wide frequency band from 0.2 to 5 Hz, while retaining an undistorted signal waveform. This gain is mainly due to suppression of noise at low frequencies, where both noise power and noise coherency is greatest. But even for the frequency band from 2 to 4 Hz, AOGF provides a typical gain in SNR of the order 6 to 8 dB compared to the array beam. The performance of AOGF appeared to be stable in time without need for readaptation, for time intervals at least one hour long. This may result in possible application of AOGF to supplement conventional beamforming for online signal detection and extraction. The proposed technique may be utilized also in post-processing for detecting and onset time estimating of seismic phases missed by conventional methods. As a result, it may reduce the detection threshold and improve the reliability of event detection and location using array signals.

 A.F. Kushnir, V.I. Pinsky, S. Tsvang, Int. Inst. of Earthquake Prediction Theory, Moscow, USSR
 J. Fyen, S. Mykkeltveit, F. Ringdal, NORSAR

References

- Capon, J. (1970): Application of signal detection and estimation theory to the large array seismology. *Proc. IEEE*, Vol. 58, 170-186.
- Kushnir, A.F. and V.M. Lapshin (1984): Optimal processing of the signals received by a group of spatially distributed sensors. *Computational Seismology*, Vol. 17, Allerton Press, Inc., 163-174.
- Kushnir, A.F., V.I. Pinsky and J. Fyen (1989): Statistically optimal event detection using small array data. Semiannual Technical Summary, 1 April 30 September 1989, NORSAR Sci. Rep. 1-89/90, Kjeller, December 1989.
- Kushnir, A.F., V.M. Lapshin, V.I. Pinsky and J. Fyen (1990): Statistically optimal event detection using small array data. *Bull. Seism. Soc. Am.*, 80, in print.
- Pisarenko, V.F., A.F. Kushnir and I.V. Savin (1987): Statistical adapative algorithms for estimation of onset moments of seismic phases. *Phys. Earth Planet. Inter.*, 47, 4-10.

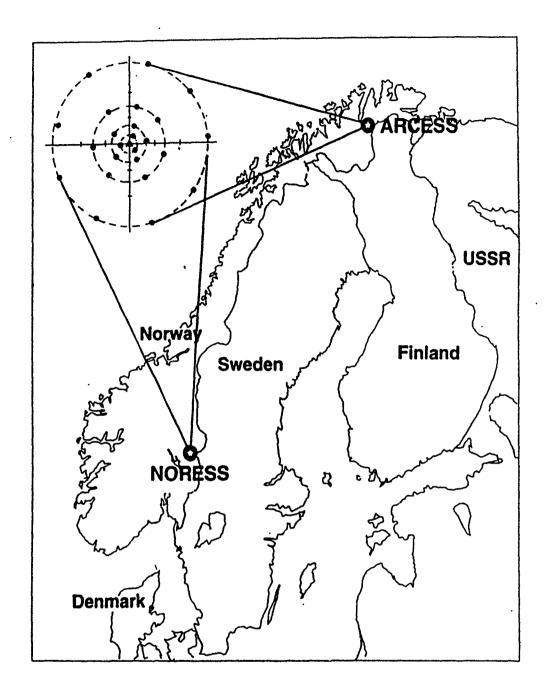

The state of the s

Fig. 7.7.1. The locations and array geometry for the NORESS and ARCESS arrays. The two arrays are essentially identical, each having 24 elements in four concentric rings (A, B, C, D) plus a center element (A0). The diameter of the outer (D) ring is 3.0 km. There are 3-component seismometers at A0 and three of the seven sites in the C-ring.

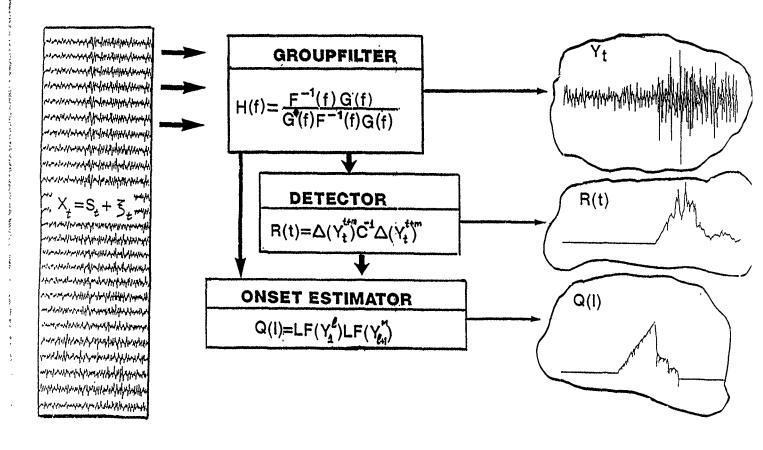


Fig. 7.7.2. Statistically optimal algorithms for preliminary array signal processing. X_t — multichannel seismic record; S_t — signal; ξ_t — noise; $H = H(\lambda)$ — frequency response of OGF; $F^{-1} = F^{-1}(\lambda)$ — inverse matrix power spectrum; $G = G(\lambda)$ — vector medium frequency response; Y_t — scalar output of AOGF, R(t) — detector statistic; Y_t^{t+m} — observations in moving window (width = m samples); Δ — asymptotically sufficient statistics; C^{-1} — inverse covariance matrix of Δ computed at adaptation step; $Q(\ell)$ — likelihood function of onset time t_e ; LF — likelihood functions of observations $Y_1^{\ell} = (Y_1, \ldots, Y_{\ell}), Y_{\ell+1}^{M} = (Y_{\ell+1}, \ldots, Y_{M})$.

NORESS noise

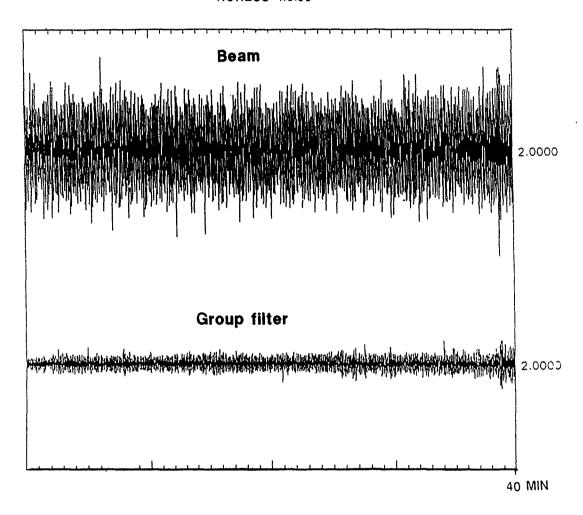


Fig. 7.7.3. 40 minutes of pure NORESS noise filtered by beam and optimal group filter in the same scale.

Gain of optimal group filter

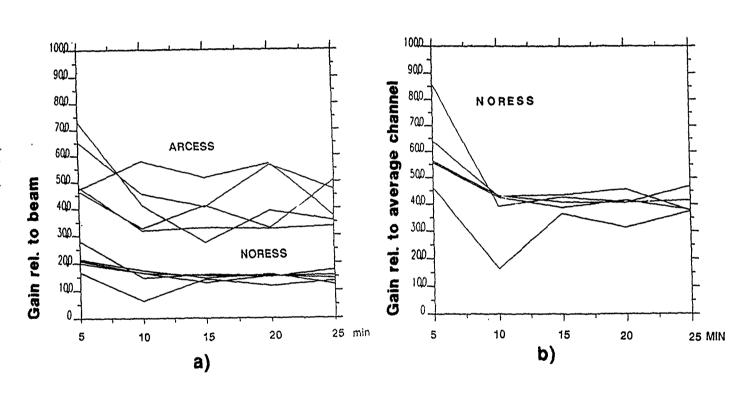


Fig. 7.7.4. Power SNR gain of optimal group filter computed each five minutes: a) relative to beamforming; and b) relative to average NORESS channel.

Group filter gain

THE REPORT OF THE PARTY OF THE

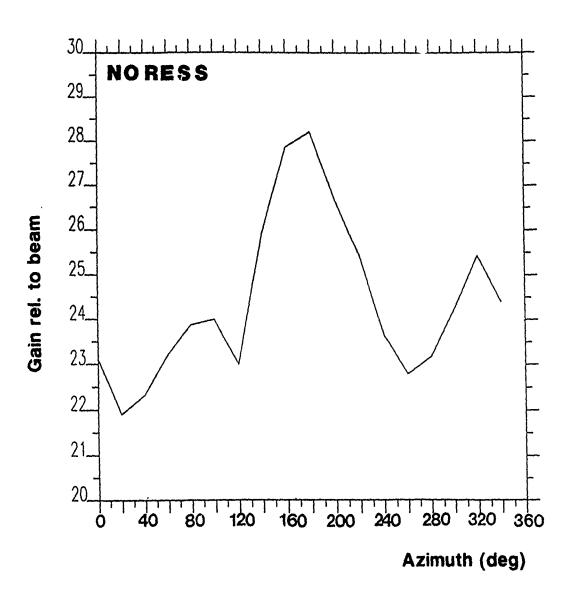


Fig. 7.7.5. Group filter gain for pure noise versus azimuth. The apparent velocity is equal to 13 km/sec. The maximum corresponds to the southern direction.

NORESS data. No Pn detection on NORESS. Only Lg detected.

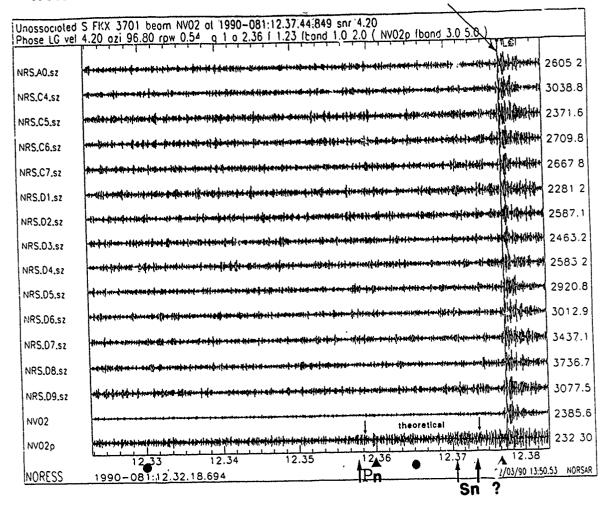


Fig. 7.7.6a. Illustration of the AOGF, OD and OE procedures as applied to NORESS data for a small event in Estonia, from which only the Lg phase was detected by the regular processing at NORSAR of NORESS data. The arrows show theoretical and computed (by the OE procedure) arrival times for Pn and Sn phases. Circles mark the time interval, in which there was a search for a Pn phase (see Fig. 7.7.6c), triangles mark the interval for searching for the Sn phase (see Fig. 7.7.6d).

FINESA DATA.



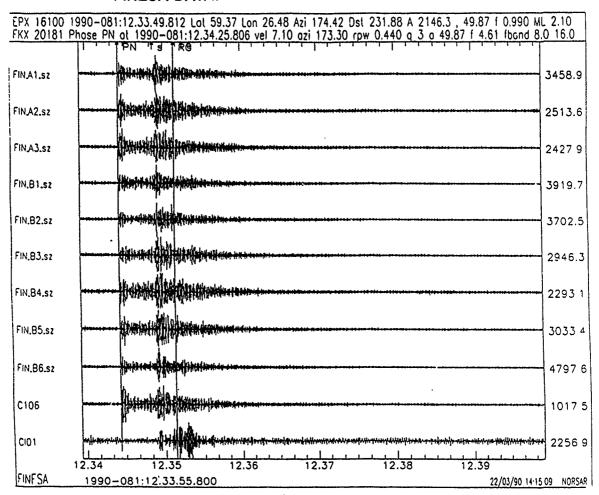


Fig. 7.7.6b. FINESA recording of the event for which Lg at NORESS is seen in Fig. 7.7.6a.

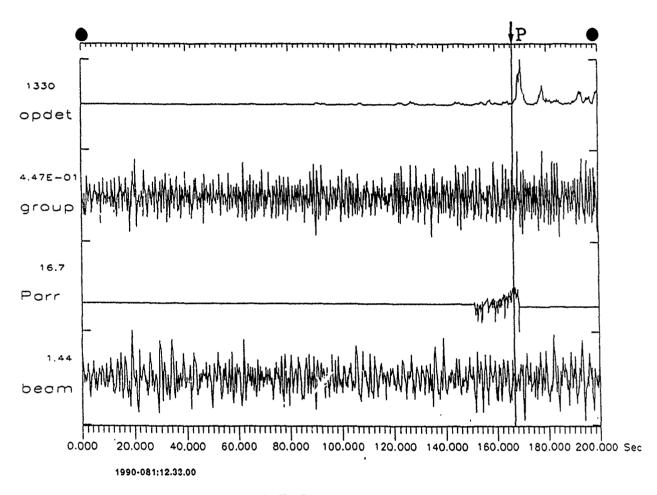

v=8, azi=98.3 Parr=166.8.

Fig. 7.7.8c. NORESS Pn-wave detection and onset estimation performed on AOGF output data. "V" and "AZI" correspond to apparent velocity and azimuth used in AOGF, "Parr" is computed by OE relative to the beginning of the interval for the search for the Pn phase.

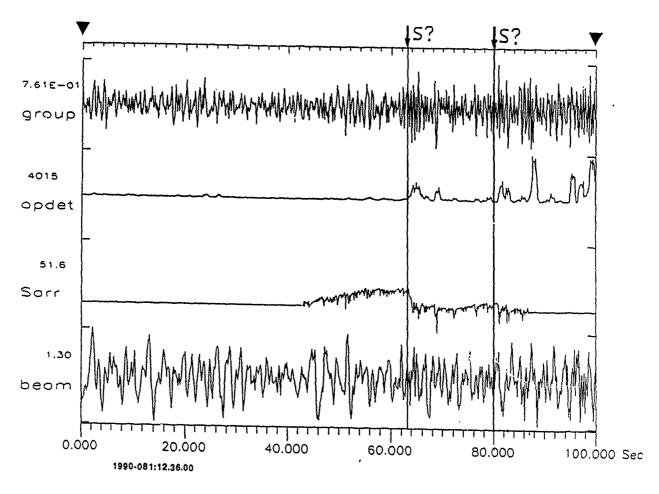

v=6 azi=98.3 Sarr=243 sec .

Fig. 7.7.6d. NORESS Sn-wave detection and onset estimation performed on AOGF output data. "V" and "AZI" correspond to apparent velocity and azimuth used in AOGF, "Sarr" is computed by OE relative to the beginning of the interval for the search for the Pn-phase.

NORESS data. No Lg detected on NORESS.


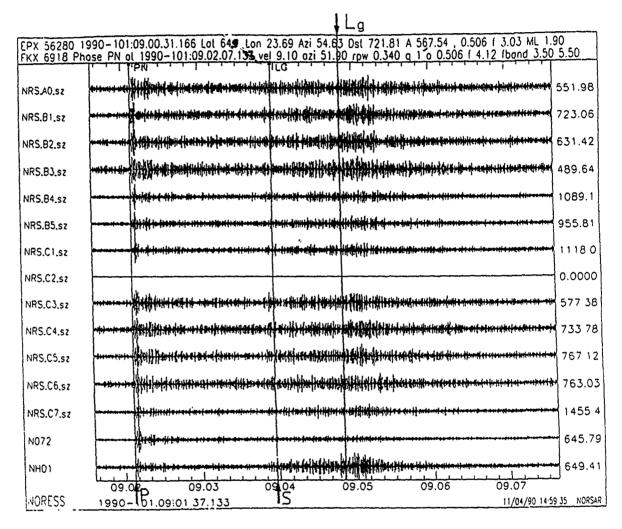


Fig. 7.7.7a. Illustration of the AOGF, OD and OE procedures as applied to an event from the USSR/Finland border region, for which the Lg phase was not detected by the NORESS regular processing. (The Sn phase at approximately 09.04 was detected, but incorrectly assigned as Lg.) Arrows show estimates of arrival times, using the OE procedure.

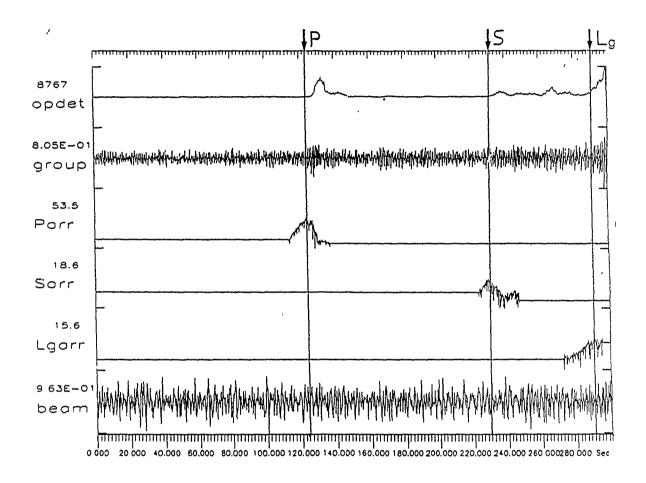

time=101:09.00.01 Parr=123 sec Sorr=230 sec Lgarr=290 .

Fig. 7.7.7b. Pn, Sn and Lg detection and estimation performed on AOGF output data. "Time" gives the time of the beginning of the adaptation. "Parr", "Sarr" and "Lgarr" are computed by OE relative to the beginning of the interval.

EARTHQUAKES

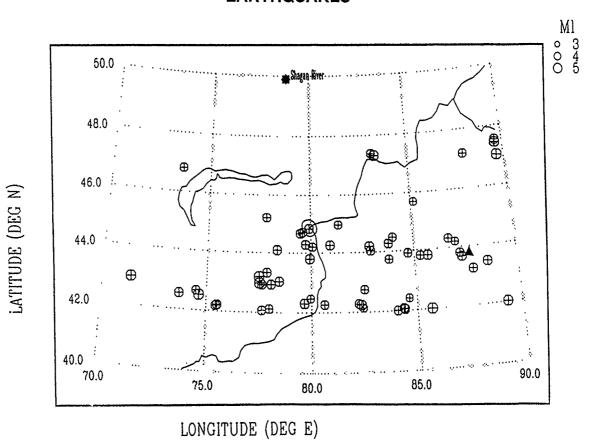


Fig. 7.7.8. Map showing the location of 35 earthquakes used in this study. Most explosions used are located at the Shagan River site.

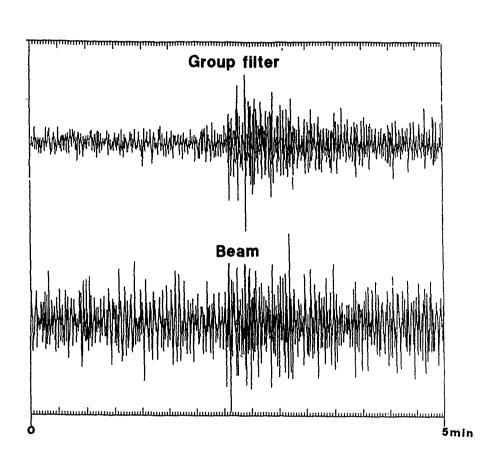


Fig. 7.7.9. Example of earthquake record filtered by beam and AOGF.

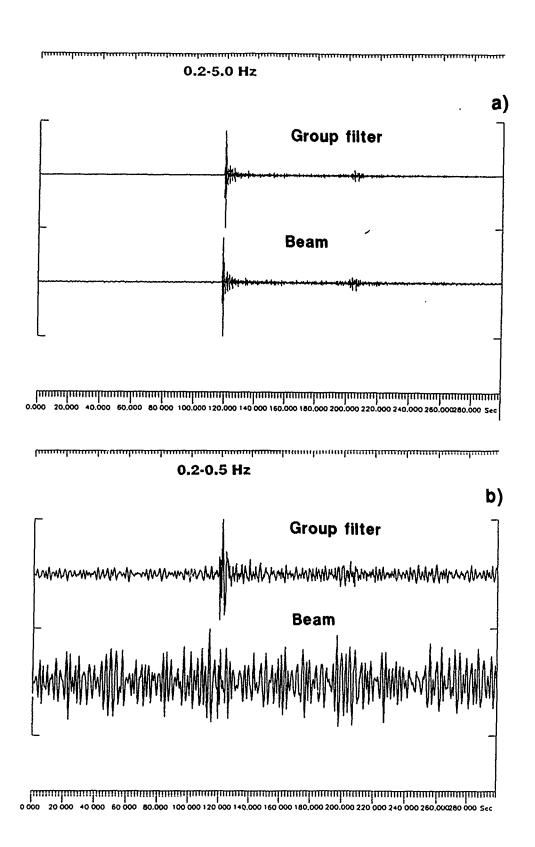


Fig. 7.7.10. Example of nuclear explosion record filtered by beam and AOGF in: a) broad frequency band and b) low frequency band.